



DATA SHEET

3EZ11~3EZ200

GLASS PASSIVATED JUNCTION SILICON ZENER DIODES

VOLTAGE- 11 to 200 Volts Power - 3.0 Watts

FEATURES

- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Typical I_D less than 1.0 μ A above 11V
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals


MECHANICAL DATA

Case: JEDEC DO-15, Molded plastic over passivated junction
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes positive end (cathode)

Standard packing: 52mm tape

Weight: 0.015 ounce, 0.04 gram

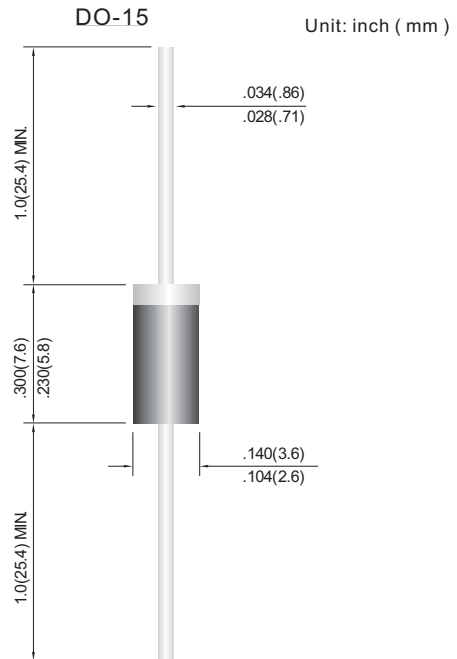

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | VALUE | UNITS |
|-----------------------------------------------------------------------------------------------------|----------------|-------------|------------------|
| Pwak Pulse Power Dissipation on TA=50°C (Notes A) Derate above 70°C | P_D | 3.0 24.0 | Watts mW / °C |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) | I_{FSM} | 15 | Amps |
| Operating and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | °C |

NOTES:

A. Mounted on 5.0mm² (.013mm thick) land areas.

B. Measured on 8.3ms, and single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum



| Part Number | V _Z @ I _{ZT} | I _{ZT} | Maximum Zener Impedance | | | Leakage Current | | Maximum Zener Current I _{ZM} | Surge Current @ Ta=25°C | PACKAGE |
|-----------------------|----------------------------------|-----------------|-----------------------------------|-----------------------------------|-----------------|-----------------|----------------|---------------------------------------|-------------------------|---------|
| | V | mA | Z _{ZT} @ I _{ZT} | Z _{ZK} @ I _{ZK} | I _{ZK} | I _R | V _R | | | |
| | | | Ohms | Ohms | mA | uA Max | V | mA | ir-mA | |
| 3.0 Watt ZENER | | | | | | | | | | |
| 3EZ11 | 11 | 68 | 4.0 | 700 | 0.25 | 1.0 | 8.4 | 225 | 1.82 | DO-15 |
| 3EZ12 | 12 | 63 | 4.5 | 700 | 0.25 | 1.0 | 9.1 | 246 | 1.66 | DO-15 |
| 3EZ13 | 13 | 58 | 4.5 | 700 | 0.25 | 0.5 | 9.9 | 208 | 1.54 | DO-15 |
| 3EZ14 | 14 | 53 | 5.0 | 700 | 0.25 | 0.5 | 10.6 | 193 | 1.43 | DO-15 |
| 3EZ15 | 15 | 50 | 5.5 | 700 | 0.25 | 0.5 | 11.4 | 180 | 1.33 | DO-15 |
| 3EZ16 | 16 | 47 | 5.5 | 700 | 0.25 | 0.5 | 12.2 | 169 | 1.25 | DO-15 |
| 3EZ17 | 17 | 44 | 6.0 | 750 | 0.25 | 0.5 | 13.0 | 150 | 1.18 | DO-15 |
| 3EZ18 | 18 | 42 | 6.0 | 750 | 0.25 | 0.5 | 13.7 | 159 | 1.11 | DO-15 |
| 3EZ19 | 19 | 40 | 7.0 | 750 | 0.25 | 0.5 | 14.4 | 142 | 1.05 | DO-15 |
| 3EZ20 | 20 | 37 | 7.0 | 750 | 0.25 | 0.5 | 15.2 | 135 | 1.00 | DO-15 |
| 3EZ22 | 22 | 34 | 8.0 | 750 | 0.25 | 0.5 | 16.7 | 123 | 0.91 | DO-15 |
| 3EZ24 | 24 | 31 | 9.0 | 750 | 0.25 | 0.5 | 18.2 | 112 | 0.83 | DO-15 |
| 3EZ27 | 27 | 28 | 10 | 750 | 0.25 | 0.5 | 20.6 | 100 | 0.74 | DO-15 |
| 3EZ28 | 28 | 27 | 12 | 750 | 0.25 | 0.5 | 21.0 | 96 | 0.71 | DO-15 |
| 3EZ30 | 30 | 25 | 16 | 1000 | 0.25 | 0.5 | 22.5 | 90 | 0.67 | DO-15 |
| 3EZ33 | 33 | 23 | 20 | 1000 | 0.25 | 0.5 | 25.1 | 82 | 0.61 | DO-15 |
| 3EZ36 | 36 | 21 | 22 | 1000 | 0.25 | 0.5 | 27.4 | 75 | 0.56 | DO-15 |
| 3EZ39 | 39 | 19 | 28 | 1000 | 0.25 | 0.5 | 29.7 | 69 | 0.51 | DO-15 |
| 3EZ43 | 43 | 17 | 33 | 1500 | 0.25 | 0.5 | 32.7 | 63 | 0.45 | DO-15 |
| 3EZ47 | 47 | 16 | 38 | 1500 | 0.25 | 0.5 | 35.8 | 57 | 0.42 | DO-15 |
| 3EZ51 | 51 | 15 | 45 | 1500 | 0.25 | 0.5 | 38.8 | 53 | 0.39 | DO-15 |
| 3EZ56 | 56 | 13 | 50 | 2000 | 0.25 | 0.5 | 42.6 | 48 | 0.36 | DO-15 |
| 3EZ62 | 62 | 12 | 55 | 2000 | 0.25 | 0.5 | 47.1 | 44 | 0.32 | DO-15 |
| 3EZ68 | 68 | 11 | 70 | 2000 | 0.25 | 0.5 | 51.7 | 40 | 0.29 | DO-15 |
| 3EZ75 | 75 | 10 | 85 | 2000 | 0.25 | 0.5 | 56.0 | 36 | 0.27 | DO-15 |
| 3EZ82 | 82 | 9.1 | 95 | 3000 | 0.25 | 0.5 | 62.2 | 33 | 0.24 | DO-15 |
| 3EZ91 | 91 | 8.2 | 115 | 3000 | 0.25 | 0.5 | 69.2 | 30 | 0.22 | DO-15 |
| 3EZ100 | 100 | 7.5 | 160 | 3000 | 0.25 | 0.5 | 76.0 | 27 | 0.20 | DO-15 |
| 3EZ110 | 110 | 6.8 | 225 | 4000 | 0.25 | 0.5 | 83.6 | 25 | 0.18 | DO-15 |
| 3EZ120 | 120 | 6.3 | 300 | 4500 | 0.25 | 0.5 | 91.2 | 22 | 0.16 | DO-15 |
| 3EZ130 | 130 | 5.8 | 375 | 5000 | 0.25 | 0.5 | 98.8 | 21 | 0.15 | DO-15 |
| 3EZ140 | 140 | 5.3 | 475 | 5500 | 0.25 | 0.5 | 106.4 | 19 | 0.14 | DO-15 |
| 3EZ150 | 150 | 5.0 | 550 | 6000 | 0.25 | 0.5 | 114 | 18 | 0.13 | DO-15 |
| 3EZ160 | 160 | 4.7 | 625 | 6500 | 0.25 | 0.5 | 121.6 | 17 | 0.12 | DO-15 |
| 3EZ170 | 170 | 4.4 | 650 | 7000 | 0.25 | 0.5 | 130.4 | 16 | 0.12 | DO-15 |
| 3EZ180 | 180 | 4.2 | 700 | 7000 | 0.25 | 0.5 | 136.8 | 15 | 0.11 | DO-15 |
| 3EZ190 | 190 | 4.0 | 800 | 8000 | 0.25 | 0.5 | 144.8 | 14 | 0.10 | DO-15 |
| 3EZ200 | 200 | 3.7 | 875 | 8000 | 0.25 | 0.5 | 152.0 | 13 | 0.10 | DO-15 |



RATING AND CHARACTERISTIC CURVES
3EZ11 THRU 3EZ200

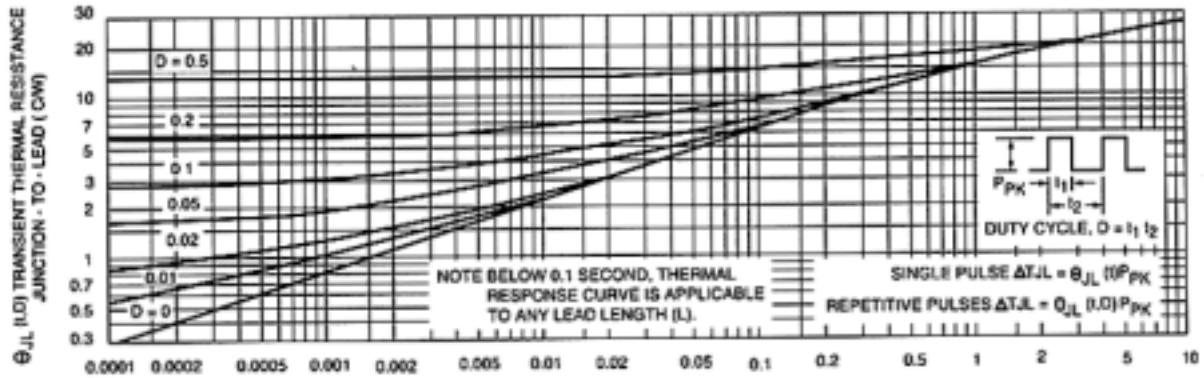


Figure 2. Typical Thermal Response L.

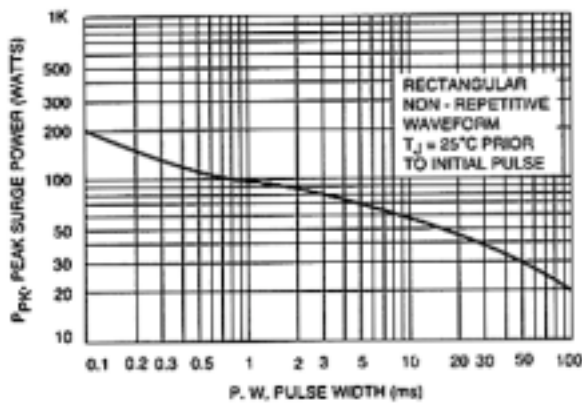


Figure 3. Maximum Surge Power

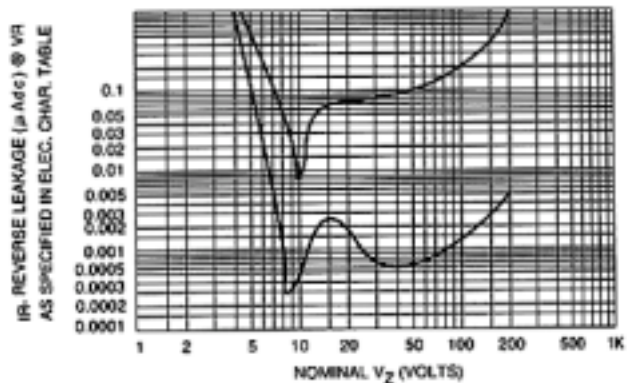


Figure 4. Typical Reverse Leakage

APPLICATION NOTE:

Since the actual voltage available from a given zener diode is temperature dependent, it is necessary to determine junction temperature under any set of operating conditions in order to calculate its value. The following procedure is recommended:

Lead Temperature, T_L , should be determined from:

$$T_L = \theta_{LA} P_D + T_A$$

θ_{LA} is the lead-to-ambient thermal resistance ($^{\circ}\text{C}/\text{W}$) and P_D is the power dissipation. The value for θ_{LA} will vary and depends on the device mounting method. θ_{LA} is generally $30\text{-}40^{\circ}\text{C}/\text{W}$ for the various clips and tie points in common use and for printed circuit board wiring.

The temperature of the lead can also be measured using a thermocouple placed on the lead as close as possible to the tie point. The thermal mass connected to the tie point is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_L , the junction temperature may be determined by:

$$T_J = T_L + \Delta T_{JL}$$

ΔT_{JL} is the increase in junction temperature above the lead temperature and may be found from Figure 2 for a train of power pulses or from Figure 10 for dc power.

$$\Delta T_{JL} = \theta_{JL} P_D$$

For worst-case design, using expected limits of I_Z , limits of P_D and the extremes of T_J (ΔT_{JL}) may be estimated. Changes in voltage, V_Z , can then be found from:

$$\Delta V = \theta_{VZ} \Delta T_J$$

θ_{VZ} , the zener voltage temperature coefficient, is found from Figures 5 and 6.

Under high power-pulse operation, the zener voltage will vary with time and may also be affected significantly by the zener resistance. For best regulation, keep current excursions as low as possible.

Data of Figure 2 should not be used to compute surge capability. Surge limitations are given in figure 3. They are lower than would be expected by considering only junction temperature, as current crowding effects cause temperatures to be extremely high in small spots resulting in device degradation should the limits of Figure 3 be exceeded.



RATING AND CHARACTERISTIC CURVES
3EZ11 THRU 3EZ200

TEMPERATURE COEFFICIENT RANGES
(90% of the Units are in the Ranges Indicated)

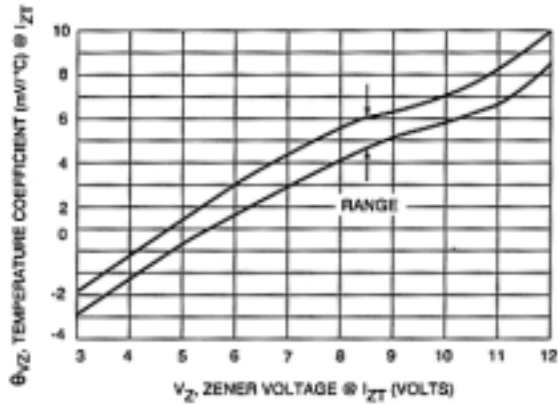


Figure 5. Units To 12 Volts

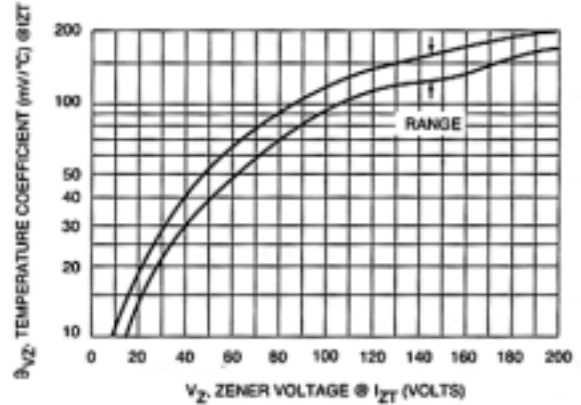


Figure 6. Units 10 To 200 Volts

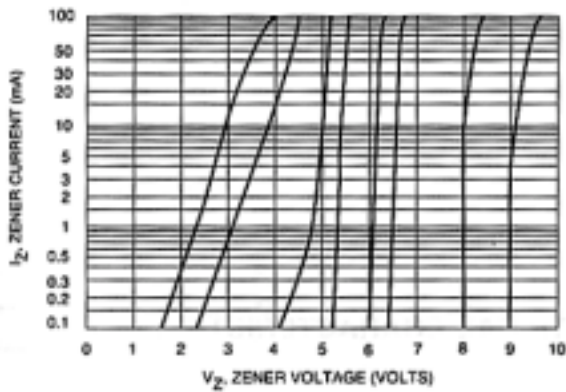


Figure 7. $V_Z = 3.9$ thru 10 Volts

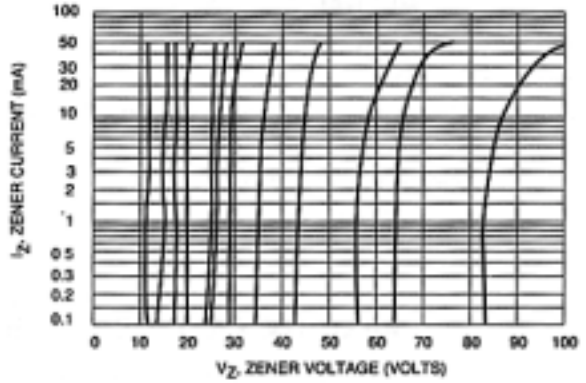


Figure 8. $Z_V = 12$ thru 82 Volts

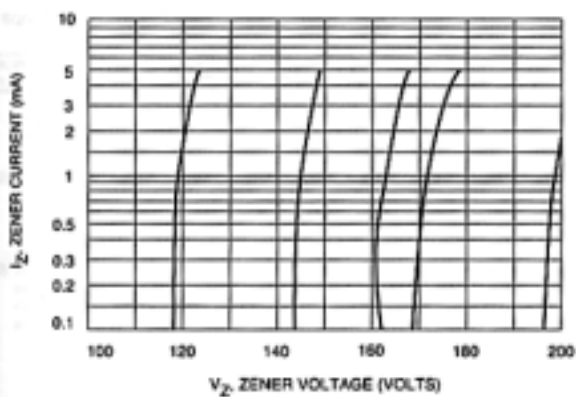


Figure 9. $V_Z = 100$ thru 200 Volts

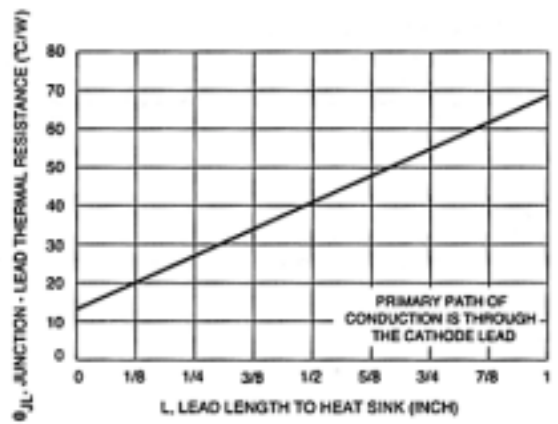


Figure 10. Typical Thermal Resistance