



### FEATURES

- Guaranteed Start-Up from below 0.9 V.
- High Efficiency.
- Low Quiescent Current.
- Few Number of External Components needed.
- Low Ripple and Low Noise.
- Fixed Output Voltage: 2.7V, 3.0V, 3.3V, and 5V.
- Space Saving SOT-89 and TO-92 Packages.

### APPLICATIONS


- Pagers.
- Cameras.
- Wireless Microphones.
- Pocket Organizers.
- Battery Backup Suppliers.
- Portable Instruments.

### DESCRIPTION

The AIC1638 is a high efficiency step-up DC/DC converter for applications using 1 to 4 NiMH battery cells. Only three external components are required to deliver a fixed output voltage of 2.7V, 3.0V, 3.3V, or 5V. The AIC1638 starts up from below 0.9V input with 1mA load. Pulse Frequency Modulation scheme brings optimized performance for applications with light output loading and low input voltages. The output ripple and noise are lower compared with the circuits operating in PSM mode.

The PFM control circuit operating in 100KHz (max.) switching rate results in smaller passive components. The space saving SOT-89 and TO-92 packages make the AIC1638 an ideal choice of DC/DC converter for space conscious applications, like pagers, electronic cameras, and wireless microphones

### TYPICAL APPLICATION CIRCUIT

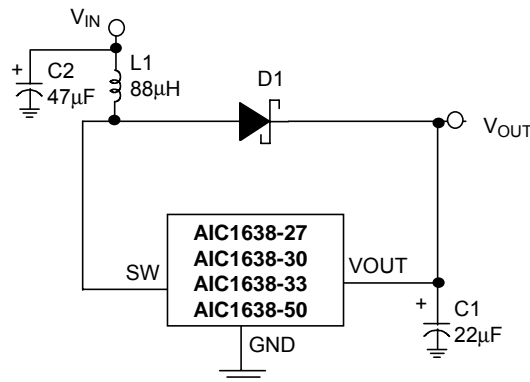




One Cell Step-Up DC/DC Converter



**ORDERING INFORMATION**

AIC1638-XXX

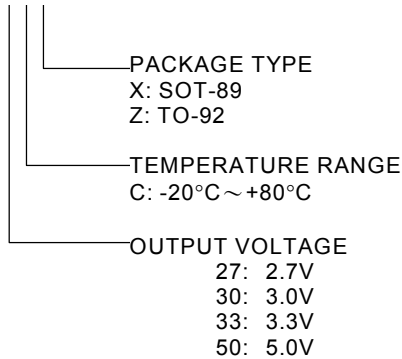


ORDER NUMBER	PIN CONFIGURATION
AIC1638-27CX AIC1638-30CX AIC1638-33CX AIC1638-50CX (SOT-89)	TOP VIEW 1: GND 2: VOUT 3: SW 
AIC1638-27CZ AIC1638-30CZ AIC1638-33CZ AIC1638-50CZ (TO-92)	TOP VIEW 1: GND 2: VOUT 3: SW 

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage	.....12V
SW pin Voltage	.....12V
SW pin Switch Current	.....0.6A
Power Dissipation	.....500mW
Operating Temperature Range	.....-20°C to 80 °C
Storage Temperature Range	..... -65°C to 150 °C
Lead Temperature (Soldering 10 Sec.)	.....260°C

**TEST CIRCUIT**

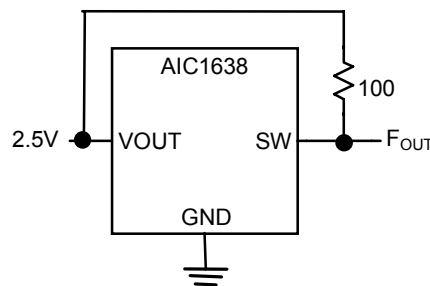

Oscillator Test Circuit

**ELECTRICAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$ ,  $I_o=10\text{mA}$ , Unless otherwise specified)







PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{IN}=1.8\text{V}$	$V_{OUT}$	2.633	2.700	2.767	V
	$V_{IN}=1.8\text{V}$		2.925	3.000	3.075	
	$V_{IN}=2.0\text{V}$		3.218	3.300	3.382	
	$V_{IN}=3.0\text{V}$		4.875	5.000	5.125	
Input Voltage		$V_{IN}$			8	V
Start-Up Voltage	$I_{OUT}=1\text{mA}$ , $V_{IN}:0\rightarrow 2\text{V}$	$V_{START}$		0.8	0.9	V
Min. Hold-on Voltage	$I_{OUT}=1\text{mA}$ , $V_{IN}:2\rightarrow 0\text{V}$	$V_{HOLD}$			0.7	V
No-Load Input Current	$I_{OUT}=0\text{mA}$	$I_{IN}$		15		$\mu\text{A}$
Supply Current	$V_{IN}=V_{OUT} \times 0.95$ Measurement of the IC input current	$I_{DD1}$		42		$\mu\text{A}$
				50		
				60		
				90		
Supply Current	$V_{IN}=V_{OUT} + 0.5\text{V}$ Measurement of the IC input current	$I_{DD2}$		7		$\mu\text{A}$
SW Leakage Current	$V_{SW}=10\text{V}$ , $V_{IN}=V_{OUT} + 0.5\text{V}$				0.5	$\mu\text{A}$
SW Switch-On Resistance	$V_{IN}=V_{SW} \times 0.95$ , $V_{SW}=0.4\text{V}$	$R_{ON}$		1.3		$\Omega$
				1.2		
				1.1		
				1		
Oscillator Duty Cycle	$V_{IN}=V_{OUT} \times 0.95$ Measurement of the IC input current	DUTY	65	75	85	%
Max. Oscillator Freq.	$V_{IN}=V_{OUT} \times 0.95$ Measurement of the IC input current	$F_{OSC}$	80	105	130	KHz
Efficiency		$\eta$		85		%



### TYPICAL PERFORMANCE CHARACTERISTICS

Capacitor (C1) : 47  $\mu$  F (Tantalum Type)


Diode (D1) : 1N5819 Schottky Type

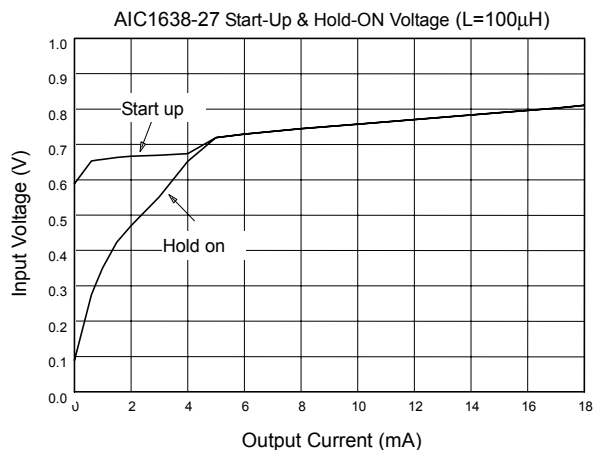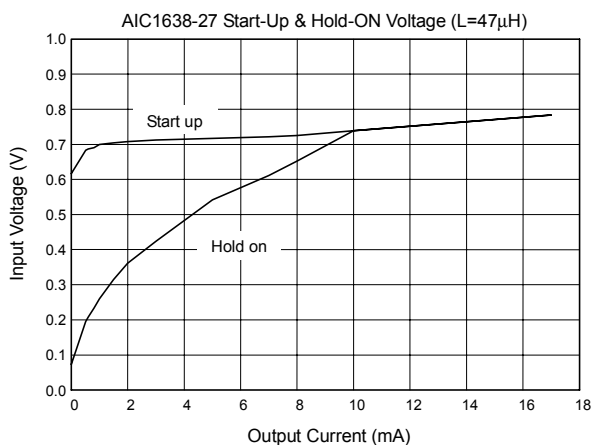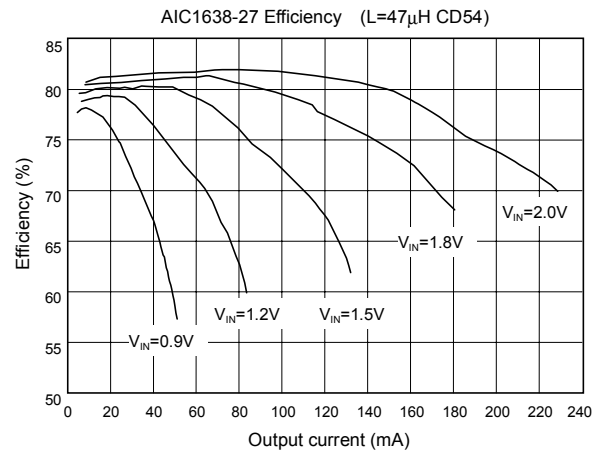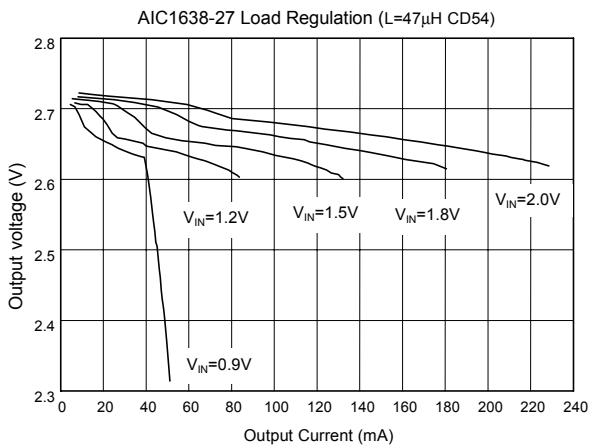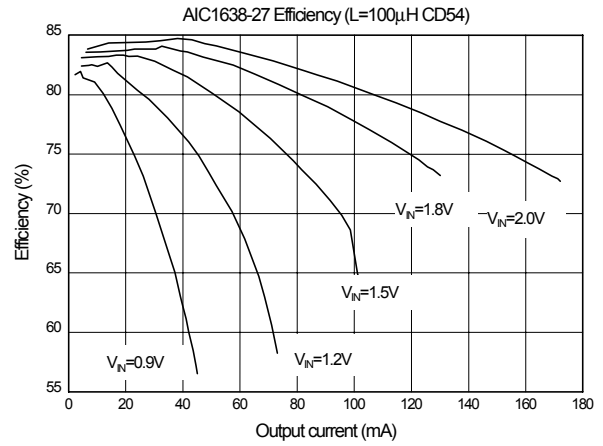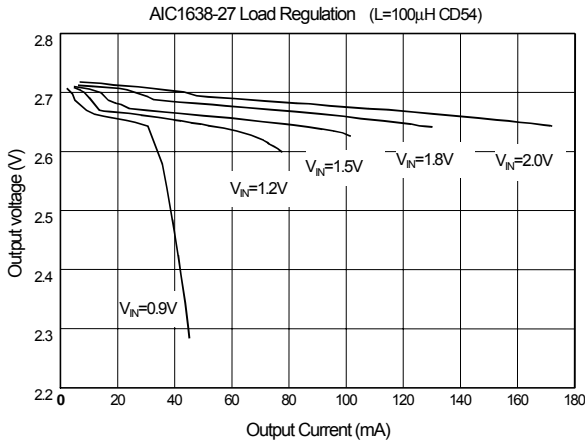




**TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)**


AIC1638-27 Output Voltage vs Temperature

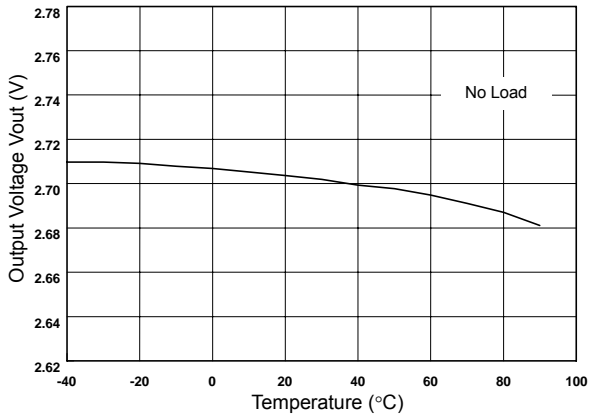


AIC1638-27 Switching Frequency vs Temperature

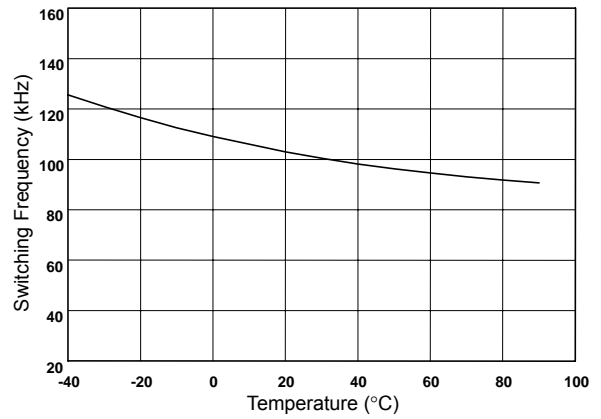


AIC1638-27 Maximum Duty Cycle vs Temperature

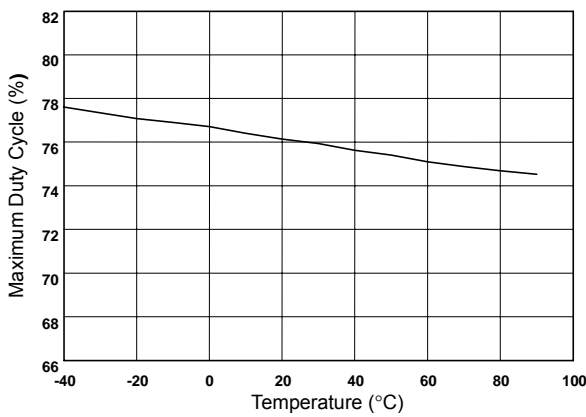


AIC1638-27 SW On Resistance vs Temperature

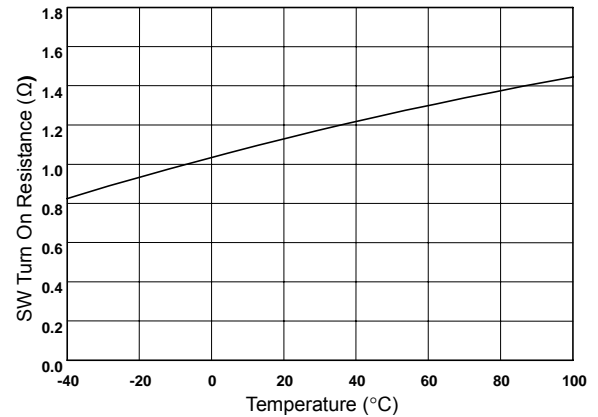

AIC1638-27 Supply Current vs Temperature






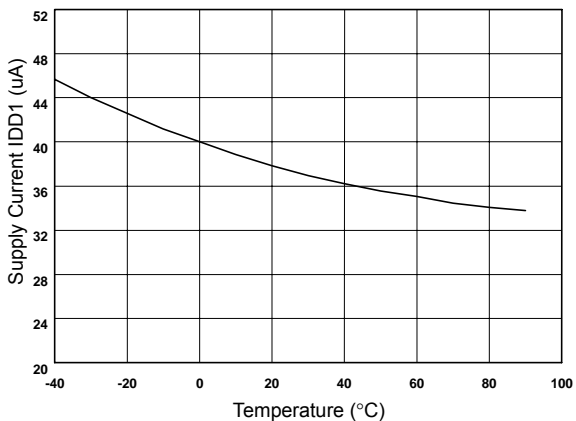


AIC1638-30 Load Regulation (L=100μH, CD54)

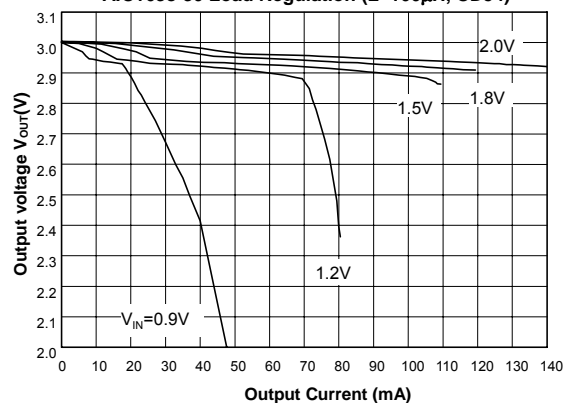




**TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)**

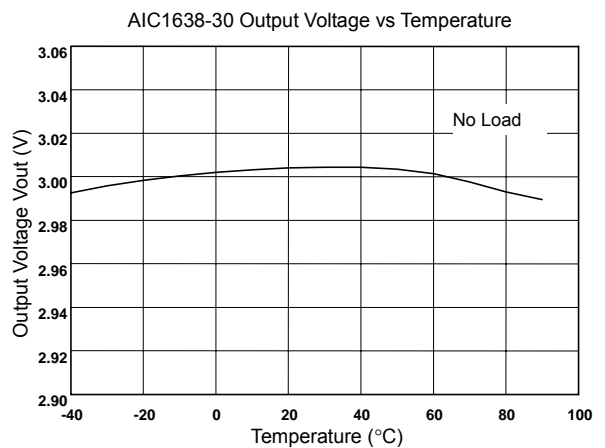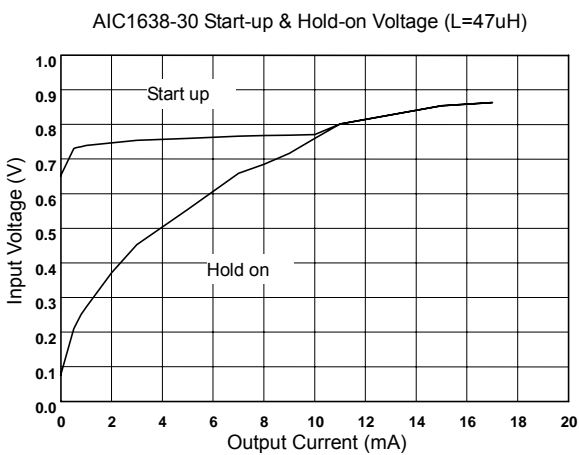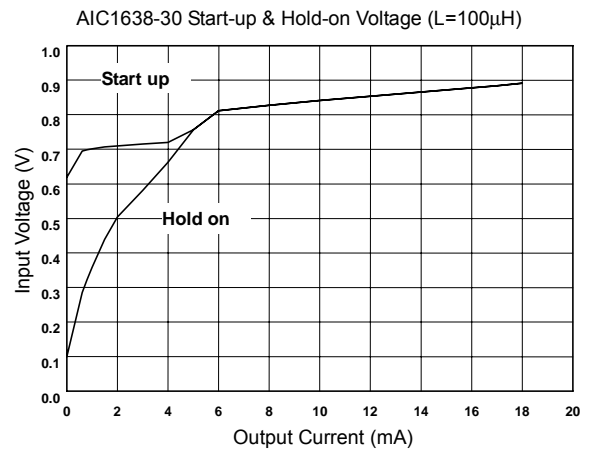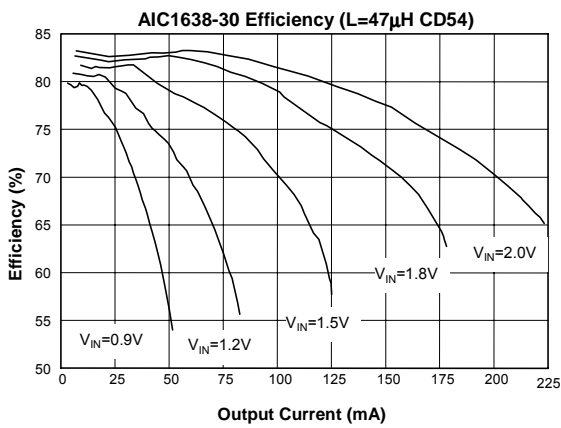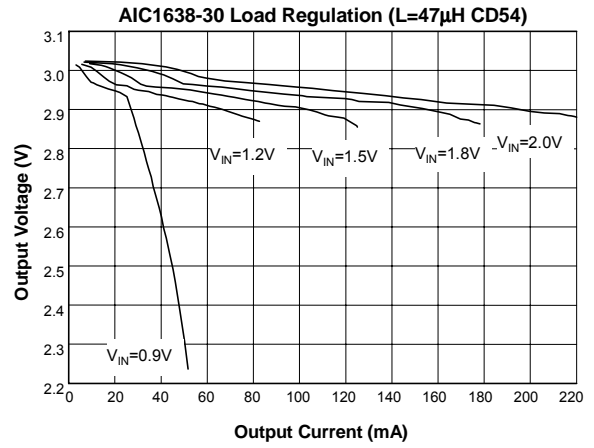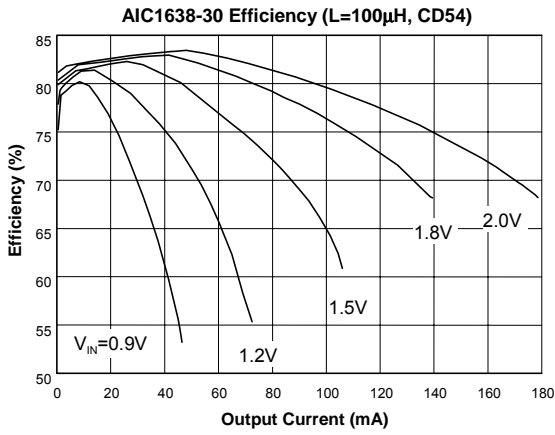




### TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)


AIC1638-30 Switching Frequency vs Temperature

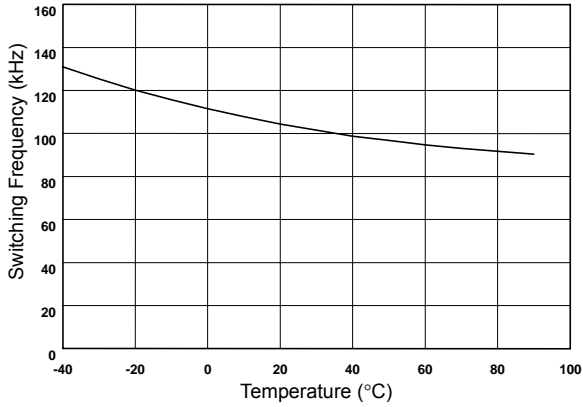


AIC1638-30 Maximum Duty Cycle vs Temperature

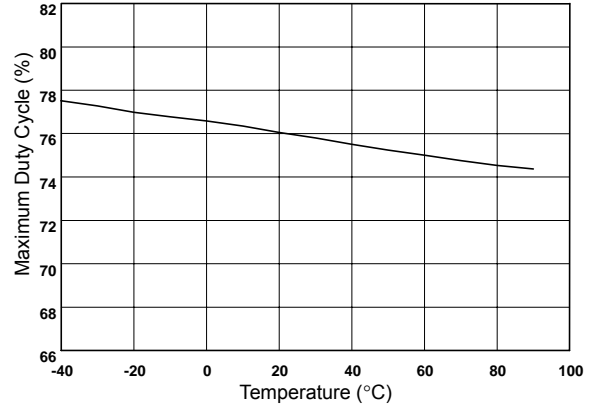


AIC1638-30 SW On Resistance vs Temperature

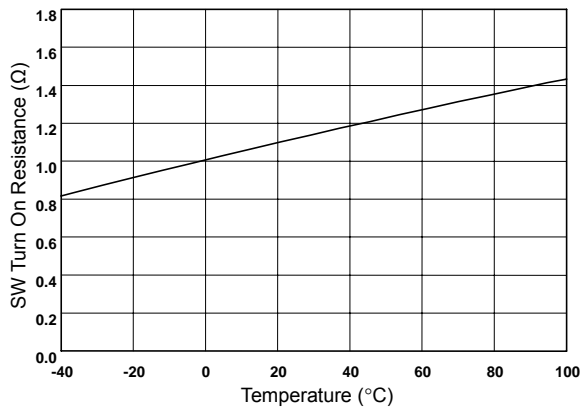


AIC1638-30 Supply Current vs Temperature

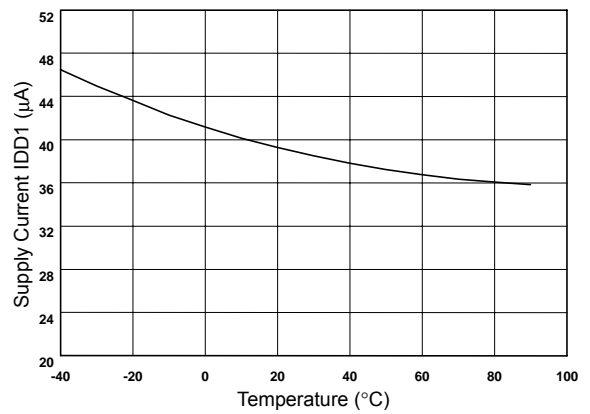

AIC1638-33 Load Regulation (L=100μH, CD54)

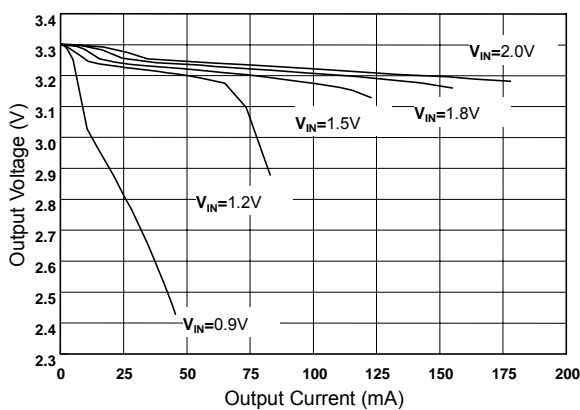


AIC1638-33 Efficiency (L=100μH, CD54)

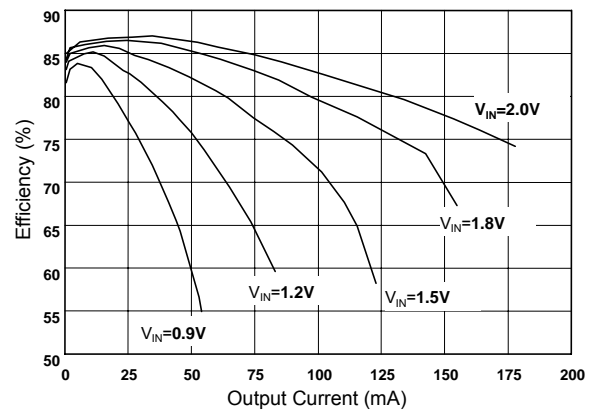




### TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)


AIC1638-33 Load Regulation (L=47 $\mu$ H, CD54)

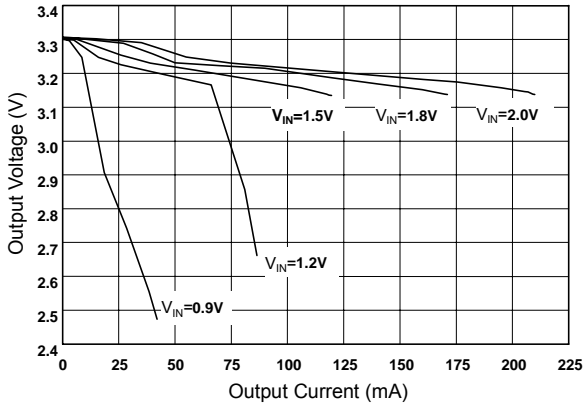


AIC1638-33 Efficiency (L=47 $\mu$ H, CD54)

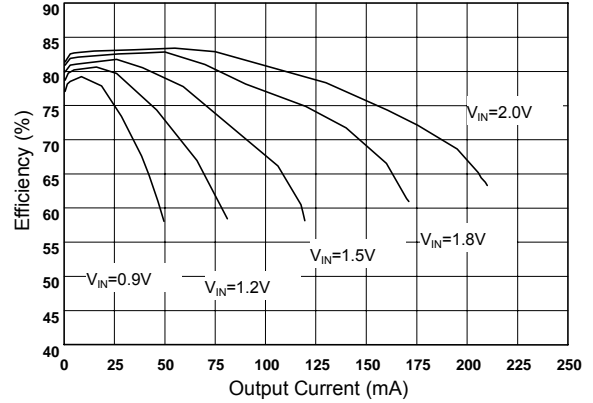


AIC1638-33 Start-up & Hold-on Voltage (L=100 $\mu$ H)

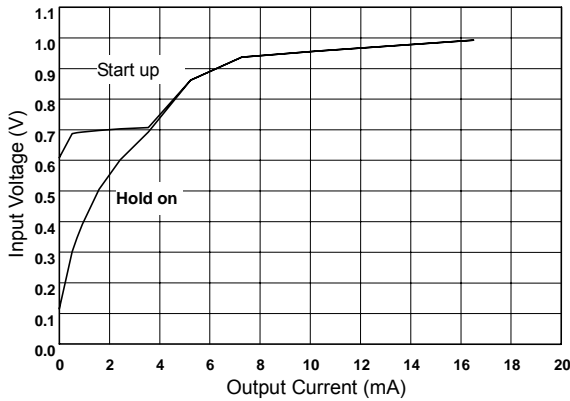


AIC1638-33 Output Voltage vs Temperature

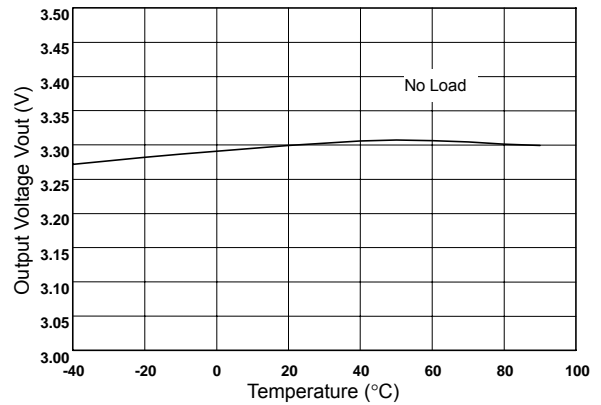

AIC1638-33 Switching Frequency vs Temperature

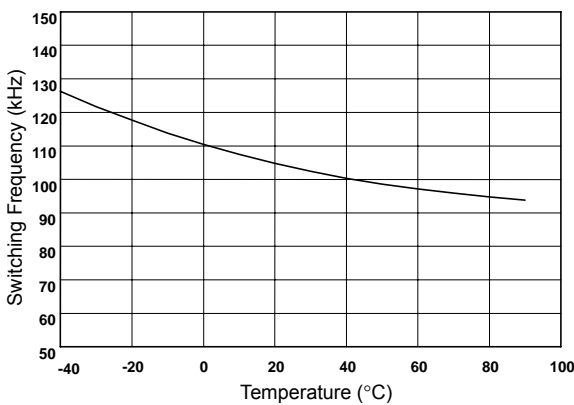

AIC1638-33 Maximum Duty Cycle vs Temperature

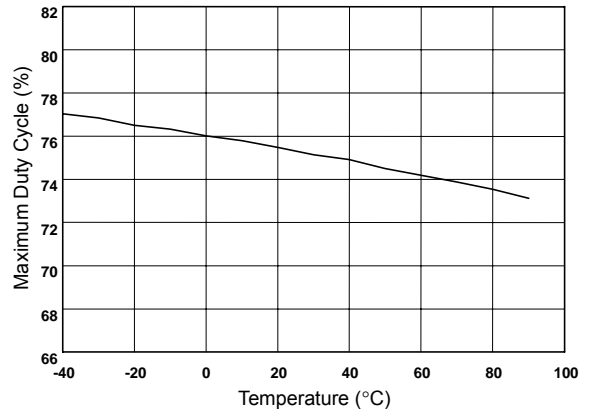







### TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)


AIC1638-33 SW On Resistance vs Temperature

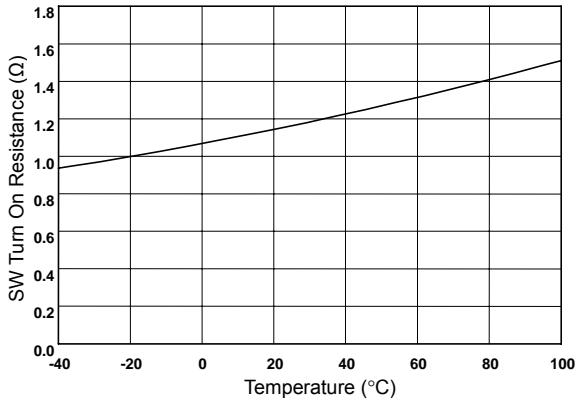


AIC1638-33 Supply Current vs Temperature

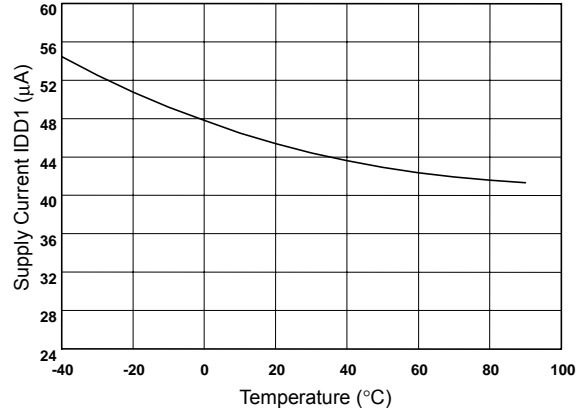


AIC1638-50 Load Regulation (L=100μH,CD54)

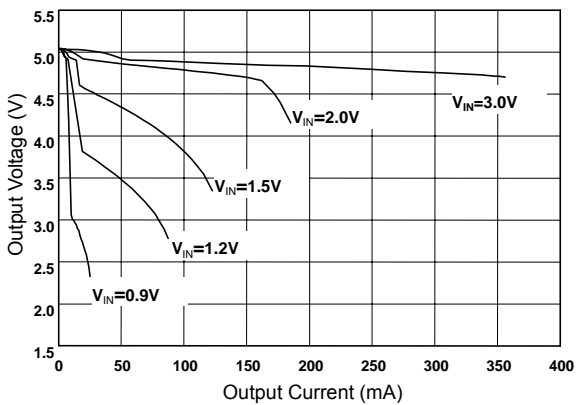


AIC1638-50 Efficiency (L=100μH,CD54)

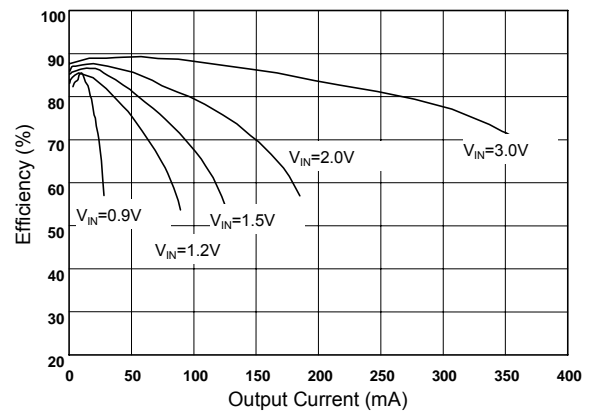

AIC1638-50 Load Regulation (L=47μH,CD54)

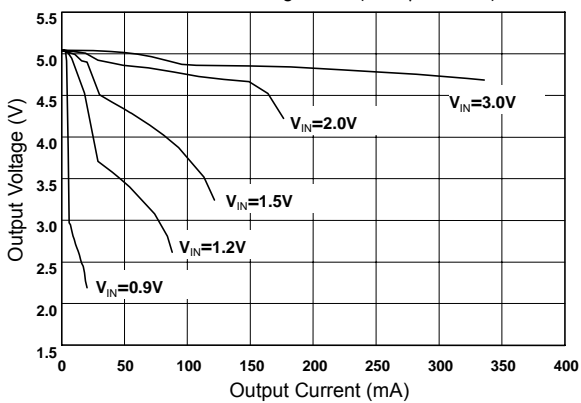


AIC1638-50 Efficiency (L=47μH,CD54)

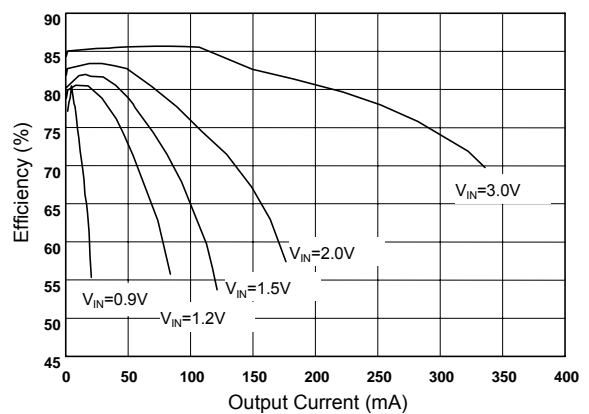




### TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)


AIC1638-50 Start-up & Hold-on Voltage (L=100 $\mu$ H)

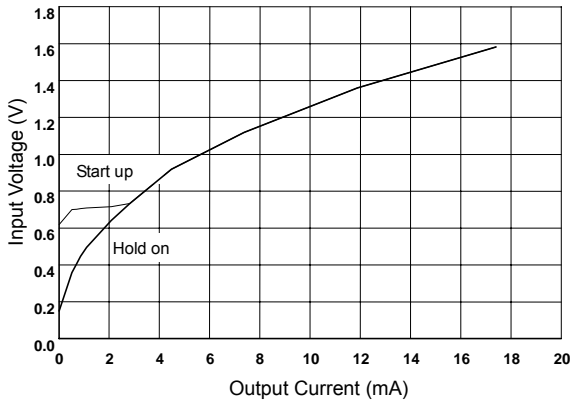


AIC1638-50 Output Voltage vs Temperature

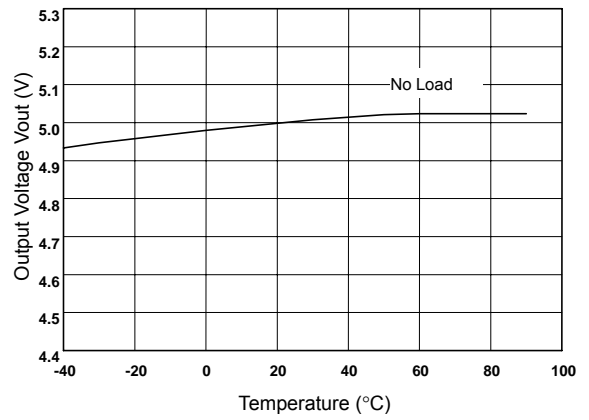


AIC1638-50 Switching Frequency vs Temperature

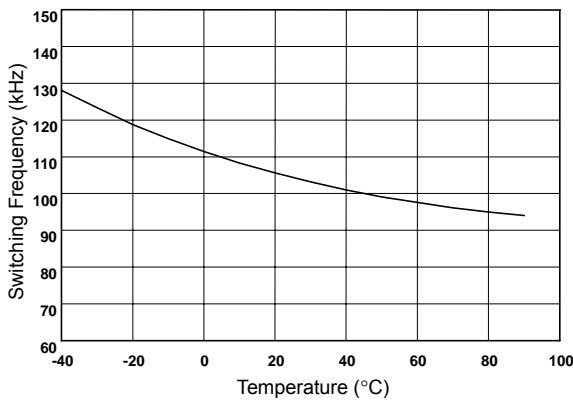


AIC1638-50 Maximum Duty Cycle vs Temperature

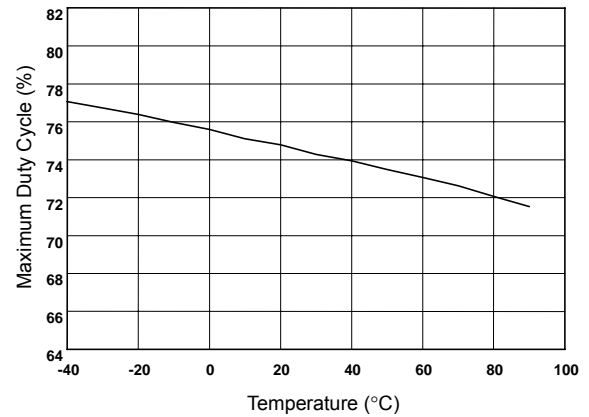

AIC1638-50 SW On Resistance vs Temperature

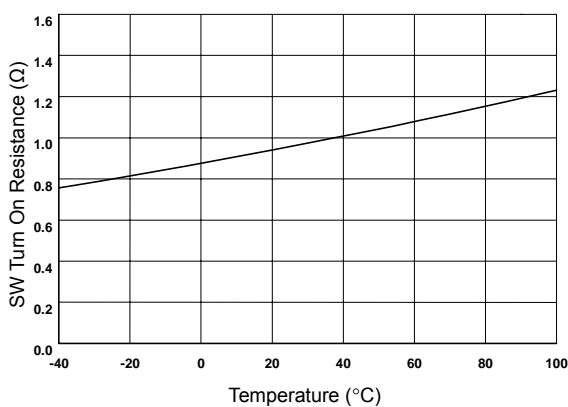


AIC1638-50 Supply Current vs Temperature

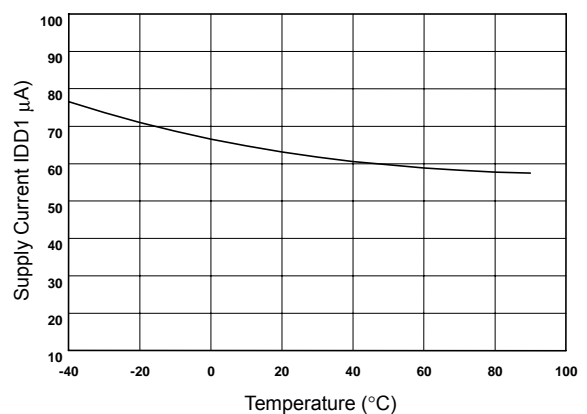




### TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)

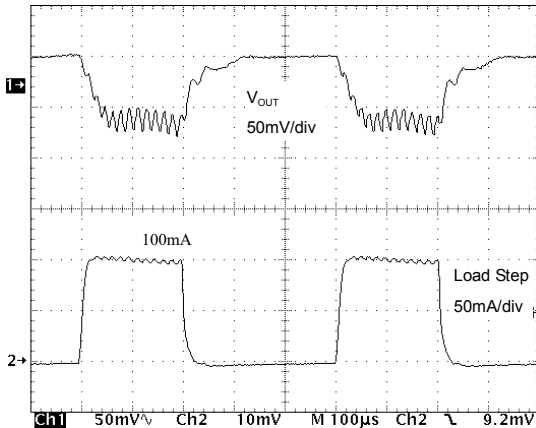


Load Transient Response  
(L=100µH, Co=47µF, VIN=2V)

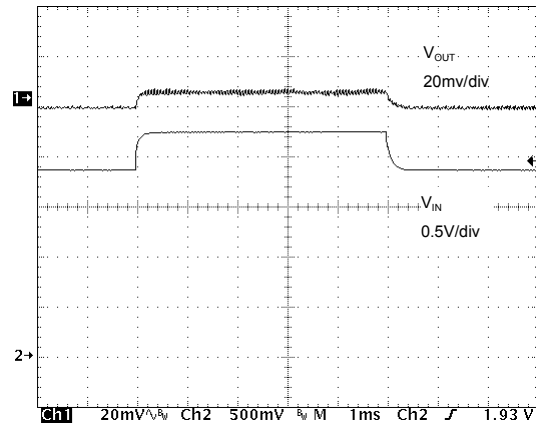

Line Transient Response

### BLOCK DIAGRAM

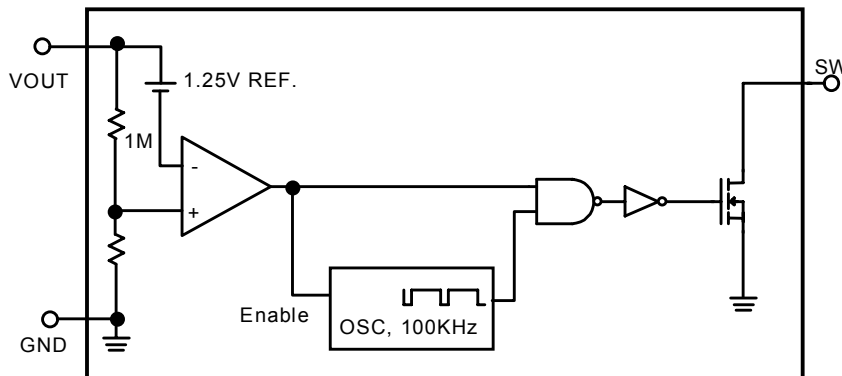

### PIN DESCRIPTIONS

- PIN1 : GND - Ground. Must be low impedance; solder directly to ground plane.
- PIN2 : VOUT - IC supply pin. Connect VOUT to the regulator output.

PIN3 : SW – Internal drain of N-MOSFET switch.

### APPLICATION INFORMATION

#### GENERAL DESCRIPTION

AIC1638 PFM (pulse frequency modulation) controller ICs combine a switch mode regulator, N-channel power MOSFET, precision voltage reference, and voltage detector in a single monolithic device. They offer both extreme low quiescent current, high efficiency, and very low gate threshold voltage to

ensure start-up with low battery voltage ( 0.8V typ.). Designed to maximize battery life in portable products, and minimize switching losses by only switching as needed service the load.


PFM controllers transfer a discrete amount of energy per cycle and regulate the output voltage by modulating switching frequency with the constant





turn-on time. Switching frequency depends on load, input voltage, and inductor value, and it can range up to 100KHz. The SW on-resistance is typically 1 to 1.5  $\Omega$  to minimize switch losses.

When the output voltage drops, the error comparator enables 100KHz oscillator that turns on the MOSFET around 7.5 $\mu$ s and 2.5 $\mu$ s off time. Turning on the MOSFET allows inductor current to ramp up, storing energy in a magnetic field. When MOSFET turns off that force inductor current through diode to the output capacitor and load. As the stored energy is depleted, the current ramp down until the diode turns off. At this point, inductor may ring due to residual energy and stray capacitance. The output capacitor stores charge when current flowing through the diode is high, and release it when current is low, thereby maintaining a steady voltage across the load.

As the load increases, the output capacitor discharges faster and the error comparator initiates cycles sooner, increasing the switching frequency. The maximum duty cycle ensure adequate time for energy transfer to output during the second half each cycle. Depending on circuit, PFM controller can operate in either discontinuous mode or continuous conduction mode. Continuous conduction mode means that the inductor current does not ramp to zero during each cycle.

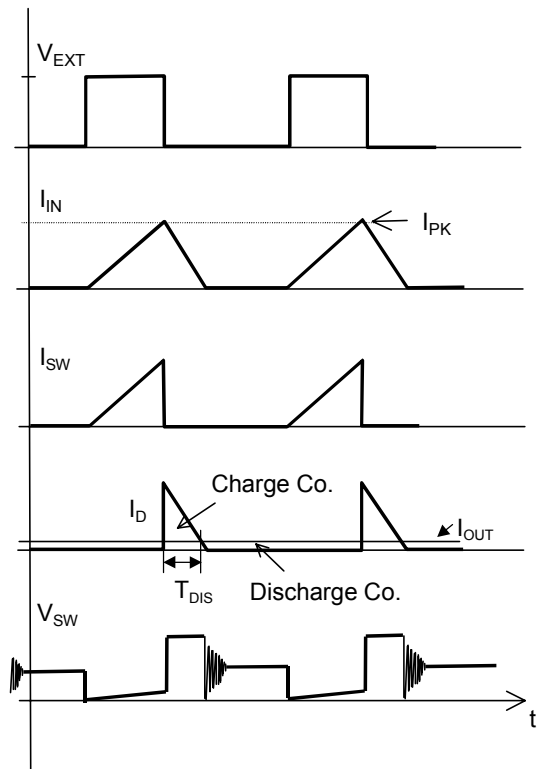

**Discontinuous Conduction Mode**

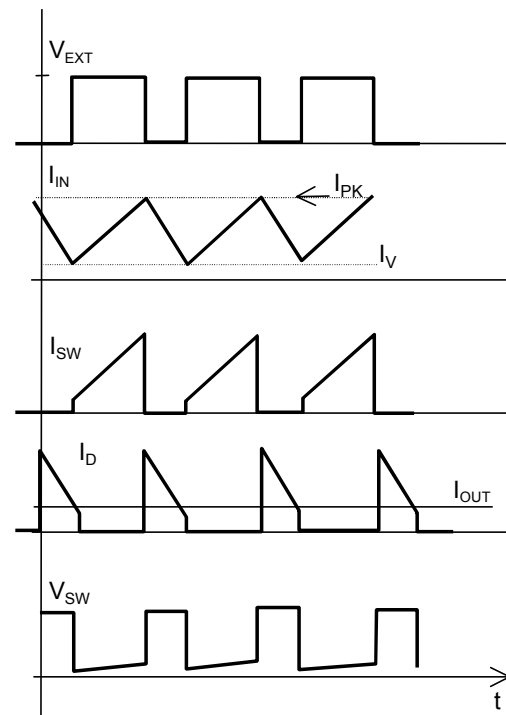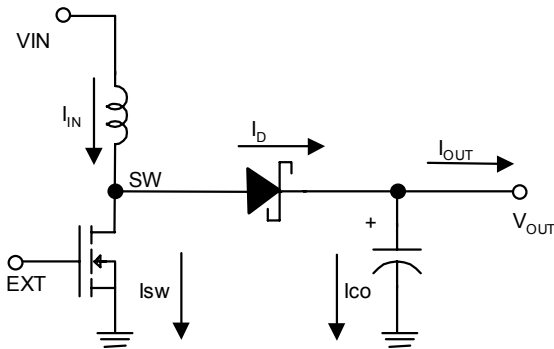

**Continuous Conduction Mode**



At the boundary between continuous and discontinuous mode, output current (IOB) is determined by

$$I_{OB} = \left( \frac{V_{IN}}{V_{OUT} + V_D} \right) \frac{1}{2} \frac{V_{IN}}{L} T_{ON}(1-x)$$

where  $V_D$  is the diode drop,

$$x = (R_{ON} + R_s) T_{ON} / L$$

$R_{ON}$  = Switch turn on resistance,  $R_s$  = Inductor DC resistance

$T_{ON}$  = Switch ON time

In the discontinuous mode, the switching frequency (fsw) is

$$f_{sw} = \frac{2(L)(V_{OUT} + V_D - V_{IN})(I_{OUT})}{V_{IN}^2 \times T_{ON}^2} (1+x)$$

In the continuous mode, the switching frequency is

$$f_{sw} = \frac{1}{T_{ON}} \frac{(V_{OUT} + V_D - V_{IN})}{(V_{OUT} + V_D - V_{SW})} \left[ 1 + \frac{x}{2} \left( \frac{V_{IN} - V_{SW}}{V_{OUT} + V_D - V_{SW}} \right) \right]$$

$$\cong \frac{1}{T_{ON}} \left( \frac{V_{OUT} + V_D - V_{IN}}{V_{OUT} + V_D - V_{SW}} \right)$$

where  $V_{sw}$  = switch drop and proportion to output current.

**INDUCTOR SELECTION**

To operate as an efficient energy transfer element, the inductor must fulfill three requirements. First, the inductance must be low enough for the inductor to store adequate energy under the worst case condition of minimum input voltage and switch ON time. Second, the inductance must also be high enough so maximum current rating of AIC1638 and inductor are not exceed at the other worst case condition of maximum input voltage and ON time. Lastly, the inductor must have sufficiently low DC resistance so excessive power is not lost as heat in the windings. But unfortunately this is inversely related to physical size.

Minimum and Maximum input voltage, output voltage and output current must be established before and inductor can be selected.

In discontinuous mode operation, at the end of the switch ON time, peak current and energy in the inductor build according to

$$I_{PK} = \left( \frac{V_{in}}{R_{on} + R_s} \right) \left( 1 - \exp\left(-\frac{R_{on} + R_s}{L} T_{on}\right) \right)$$

$$\cong \left( \frac{V_{IN}}{L} \right) T_{ON} \left( 1 - \frac{x}{2} \right)$$

$$\cong \frac{V_{IN}}{L} T_{ON} \quad (\text{Simple losses equation}),$$

where  $x = (R_{ON} + R_s) T_{ON} / L$

$$EL = \frac{1}{2} L \times I_{pk}^2$$

Power required from the inductor per cycle must be equal or greater than

$$PL/f_{sw} = (V_{OUT} + V_D - V_{IN})(I_{OUT}) \left( \frac{1}{f_{sw}} \right)$$

in order for the converter to regulate the output.

When loading is over IOB, PFM controller operates in continuous mode. Inductor peak current can be derived from

$$I_{PK} = \left( \frac{V_{OUT} + V_D - V_{SW}}{V_{IN} - V_{SW}} - \frac{x}{2} \right) I_{OUT} + \left( \frac{V_{IN} - V_{SW}}{2L} \right) T_{ON} \left( 1 - \frac{x}{2} \right)$$

Valley current (Iv) is

$$I_v = \left( \frac{V_{OUT} + V_D - V_{SW}}{V_{IN} - V_{SW}} - \frac{x}{2} \right) I_{OUT} - \left( \frac{V_{IN} - V_{SW}}{2L} \right) \times T_{ON} \left( 1 - \frac{x}{2} \right)$$



Table 1 Indicates resistance and height for each coil.

Power Inductor Type		Inductance ( $\mu\text{H}$ )	Resistance ( $\Omega$ )	Rated Current (A)	Height (mm)
Coilcraft SMT Type (www.coilcraft.com)	DS1608	22	0.10	0.7	2.9
		47	0.18	0.5	
		100	0.38	0.3	
	DO3316	22	0.08	2.7	5.2
		47	0.14	1.8	
	Sumida SMT Type CD54		47	0.25	0.7
100			0.50	0.5	
Hold SMT Type PM54		47	0.25	0.7	4.5
		100	0.50	0.5	
Hold SMT Type PM75		33	0.11	1.2	5.0

## CAPACITOR SELECTION

A poor choice for a output capacitor can result in poor efficiency and high output ripple. Ordinary aluminum electrolytic, while inexpensive may have unacceptably poor ESR and ESL. There are low ESR aluminum capacitors for switch mode DC-DC converters which work much better than general propose unit. Tantalum capacitors provide still better performance at more expensive. OS-CON capacitors have extremely low ESR in a small size. If capacitance is reduced, output ripple will increase.

Most of the input supply is supplied by the input bypass capacitor, the capacitor voltage rating should be at least 1.25 times greater than a maximum input voltage.

## DIODE SELECTION

Speed, forward drop, and leakage current are the three main consideration in selecting a rectifier diode. Best performance is obtained with Schottky rectifier diode such 1N5819. Motorola makes MBR0530 in surface mount. For lower output power a 1N4148 can be used although efficiency and start-up voltage will suffer substantially.

## COMPONENT POWER DISSIPATION

Operating in discontinuous mode, power loss in the winding resistance of inductor can be approximate equal to

$$P_{DL} = \frac{2}{3} \left( \frac{T_{ON}}{L} \right) (R_s) \left( \frac{V_{OUT} + V_D}{V_{OUT}} \right) (P_{OUT})$$

where  $P_{OUT} = V_{OUT} * I_{OUT}$ ;  $R_s$  = Inductor DC R;



$V_D$  = Diode drop.

The power dissipated in a switch loss is


$$PD_{sw} = \frac{2}{3} \left( \frac{T_{ON}}{L} \right) (R_{ON}) \left( \frac{V_{OUT} + V_D - V_{IN}}{V_{OUT}} \right) (P_{OUT})$$

The power dissipated in rectifier diode is

$$PDD = \left( \frac{V_D}{V_{OUT}} \right) (P_{OUT})$$

## PHYSICAL DIMENSION

### SOT-89 (unit: mm)

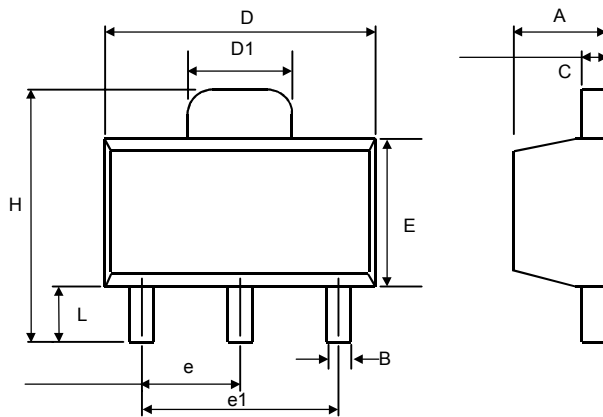


SYMBOL	MIN	MAX
A	1.40	1.60
B	0.36	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 (TYP.)	
e1	3.00 (TYP.)	
H	3.94	4.25
L	0.89	1.20

### SOT-89 MARKING

Part No.	Marking
AIC1638-27	AN27
AIC1638-30	AN30
AIC1638-33	AN33
AIC1638-50	AN50

### TO-92 (unit: mm)

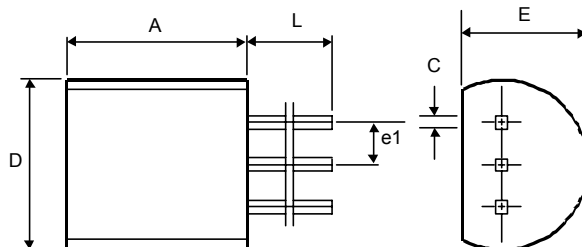

SYMBOL	MIN	MAX
A	4.32	5.33
C	0.38 (TYP.)	
D	4.40	5.20
E	3.17	4.20
e1	1.27 (TYP.)	
L	12.7	-