

JGC-4F (HFS4)

SOLID STATE RELAY



File No.: E133481



File No.: R2024431



File No.: CQC02001001946



Features

- DC input-AC output for 2A load at 25°C
- Photo isolation
- Built-in snubber
- Zero cross or random turn-on
- Printed circuit board mount
- Environmental protection product available (RoHs & WEEE compliant)

INPUT (TA = 25°C)

Control voltage range	05D	4 to 6VDC
	12D	9.6 to 14.4VDC
	24D	19.2 to 28.8VDC
Must operate voltage	05D	Max. 4VDC
	12D	Max. 9.6VDC
	24D	Max. 19.2VDC
Must release voltage		Min. 1.0VDC
typical input current		10mA

OUTPUT

Load voltage range (at 47 to 63Hz)	75 to 250VAC	
Load current range	0.1 to 2A	
Max. surge current (10ms)	Max. 25Apk	
Max. leakage current	Max. 1.5mA	
Max. on-state voltage drop	Max. 1.5VAC	
Max. turn-on time	Zero cross turn-on	Max. 1 0ms
	Random turn-on	Max. 1ms
Max. turn-off time	Max. 10ms	
Transient overvoltage	Max. 600Vpk	
Min. off-state dv/dt	Min. 100V/μs	
Zero-crossover voltage	Max. ±15V	
Min. power factor	0.5	

GENERAL


Dielectric strength (input to output)	2500VAC (50/60Hz 1min.)	
Insulation resistance	Min. 1000MΩ (at 500VDC)	
Max. capacitance (input to output)	5pF	
Vibration durability	10 to 55HZ Double amplitude 1.5mm	
Shock durability	1000m/s ²	
Ambient temperature	Operating	-30°C to +80°C
	Storage	-30°C to +100°C
Ambient Humidity	45% to 85%	
Unit weight	Typ. 6g	

DESCRIPTION

This SPST-NO printed circuit board mount SIP SSR provides AC output switching in a high density package. The JGC-4F's DC input is compatible with 5, 12 and 24V logic systems .All models include an internal snubber. The relays provide 2000Vrms opto-isolation, between input and output. Encapsulation, thermally conductive epoxy.

PRECAUTIONS

- 1、 Soldering must be completed within 10 seconds at 260 or less or within 5 seconds at 350 °C or less.
- 2、 The SSR case serves to dissipate heat. Install the relays so that they are adequately ventilated. If poor ventilation is unavoidable, reduce the load current by half.
- 3、 The input circuitry does not incorporate a circuit protecting the SSR from being damaged due to a reversed connection.
- 4、 Make sure that the polarity is correct when connecting the input lines.
- 5、 When using the JGC-4F series for an AC load with a peak voltage of more than 450V, connect the load terminals of the relay to an inrush absorber(varistor). The recommended varistor voltage, 440 to 470V.
- 6、 The load terminals are internally connected to a snubber circuit that absorb noise. However, if wiring from these terminals is laid with or placed in the same duct as high-voltage or power lines, noise may be induced, causing the SSR to operate irregularly or malfunction.
- 7、 When using the JGC-4F series in phase control applications, at a phase control angle close to 180 degrees the relay's input signal turn off at the trailing edge of the AC sine wave must be limited to end 200μs before AC zero cross. This assures that the relay has time to switch off. Shorter times may cause loss of control at the following half cycle.
- 8、 Terminal arrangement

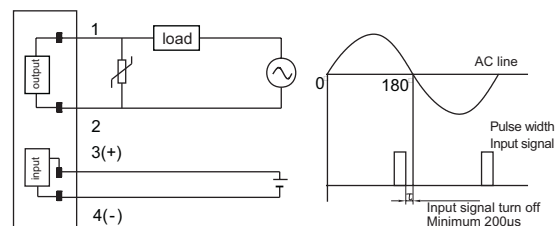

HONGFA RELAY


ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

VERSION: EN02-20050301

ORDERING INFORMATION

Type	JGC-4F / 12 D 1 T XXX
Input voltage	05: 4 to 6V 12: 9.6 to 14.4V 24: 19.2 to 28.8V
Input voltage form	D: DC
Zero cross function	0: Zero cross turn-on 1: Random turn-on
Termination	T: Same as TOSHIBA TSZXX48S M: Same as OMRON G3MB/G3MC
Special request code	(For example: 551: Lead-free 555: RoHs & WEEE compliant)

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

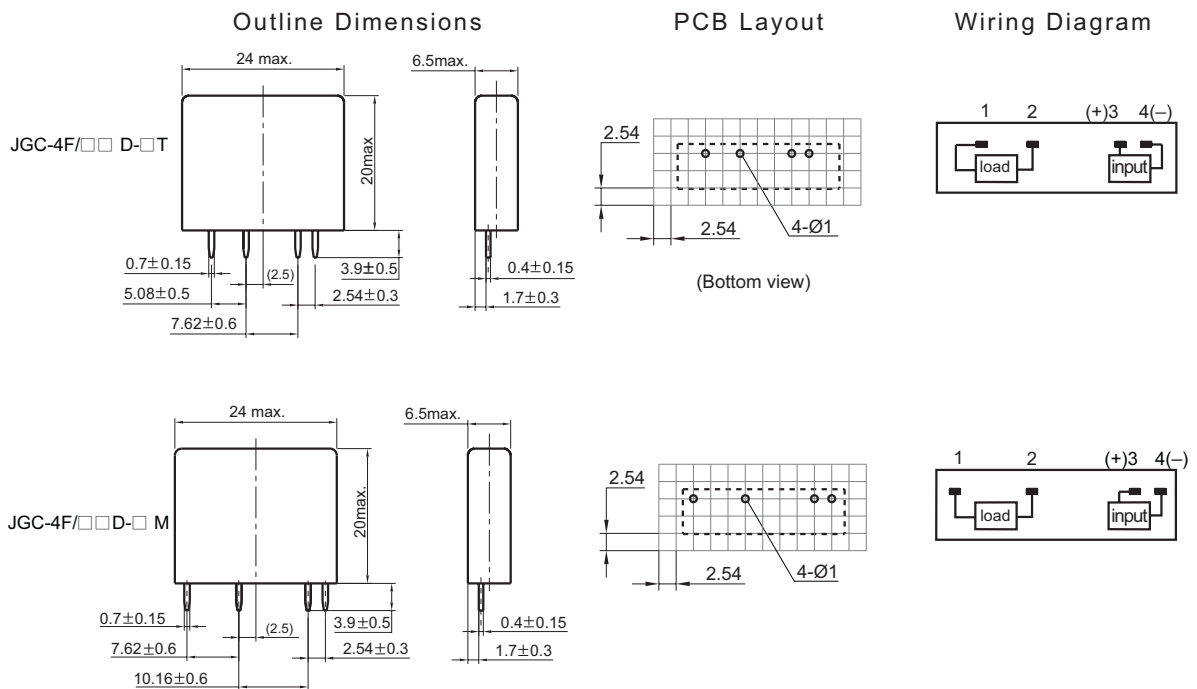

CHARACTERISTICS CURVE

