



LB1246

Active-Low Input Printer Driver

Overview

The LB1246 is a 7-channel driver array with large current, low saturation output and contains a motor driver with brake circuit. It is suited for use in low active input, low voltage, large current driver applications.

Features

- Low active input type.
- Large current capacity (400mA) and low saturation output voltage (0.5V max at 400mA).
- Motor driver with spark killer.
- Input protecting diode.
- Especially suited for battery-operated printer drivers of various types.

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\text{ max}}$		-0.3 to +7.0	V
Output supply voltage	V_{OUT}		-0.3 to +10	V
Input supply voltage	V_{IN}	$GND \leq V_{IN}$	$V_{CC} - 7.0$ to $V_{CC} + 15$	V
Output current	I_{OUT}	Per unit	400	mA
Spark killer diode forward current	I_{FSM}	Pulse width $\leq 35\text{ms}$, duty 5%	400	mA
GND pin current	I_{GND}	Pulse width $\leq 35\text{ms}$	3200	mA
Instantaneous current drain	I_{CCP}	Pulse width $\leq 35\text{ms}$, duty 5%	400	mA
Allowable power dissipation	$P_d\text{ max}$		1130	mW
Operating temperature	T_{opr}		-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$


Allowable Operating Ranges at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage	V_{CC}		2.3 to 6.0	V
Input H-level voltage	V_{IH}	$GND \leq V_{IN}$, $I_{OUT} = 200\text{mA}$	$V_{CC} - 6.0$ to $V_{CC} - 2.3$	V
Input L-level voltage	V_{IL}	$I_{OUT} \leq 100\mu\text{A}$	$V_{CC} - 0.7$ to $V_{CC} + 15$	V

Package Dimensions

unit:mm

3007B-DIP18

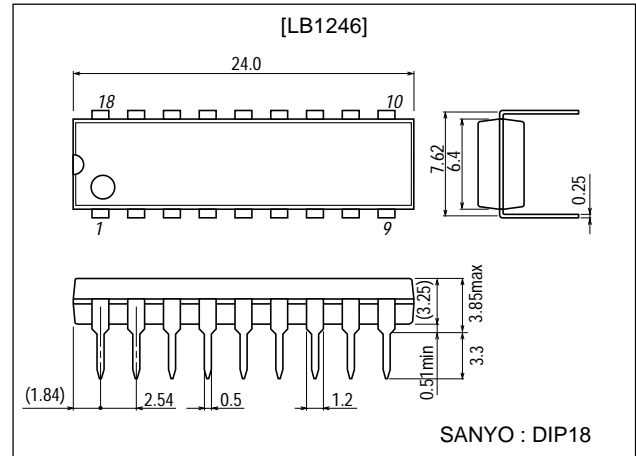

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company




TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN


LB1246

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output voltage	V_{OUT1}	$V_{CC}=2.3\text{V}, V_{IN}=V_{CC}-2.3\text{V}, I_{OUT}=200\text{mA}$			0.4	V
	V_{OUT2}	$V_{CC}=3.5\text{V}, V_{IN}=V_{CC}-3.0\text{V}, I_{OUT}=200\text{mA}$			0.25	V
	V_{OUT3}	$V_{CC}=6.0\text{V}, V_{IN}=V_{CC}-5.5\text{V}, I_{OUT}=400\text{mA}$			0.25	V
Output sustain voltage	$V_{O(SUS)}$	$I_{OUT}=400\text{mA}$	10			V
Input current	I_{IN}	$V_{CC}=6.0\text{V}, V_{IN}=V_{CC}-6.0\text{V}$	-1.0			mA
Supply leakage current	$I_{CC(OFF)}$	$V_{IN}=V_{CC}=6.0\text{V}$			20	μA
Output leakage current	I_{OFF}	$V_{OUT}=V_{CC}=6.0\text{V}, V_{IN}=V_{CC}=-0.7\text{V}$			100	μA
Spark killer diode forward voltage	$V_{F(S)}$	$I_{F(S)}=400\text{mA}$			3.0	V

Equivalent Circuit

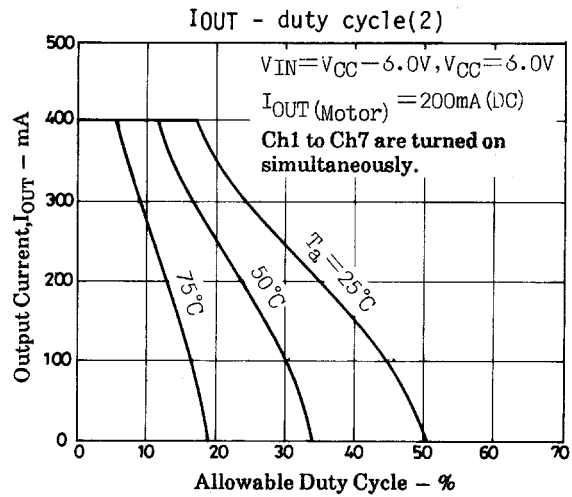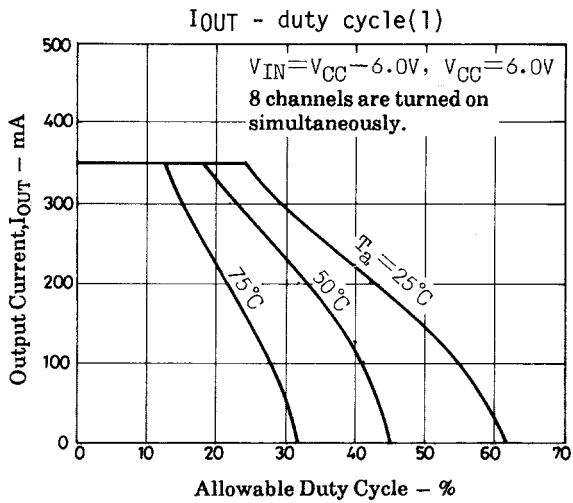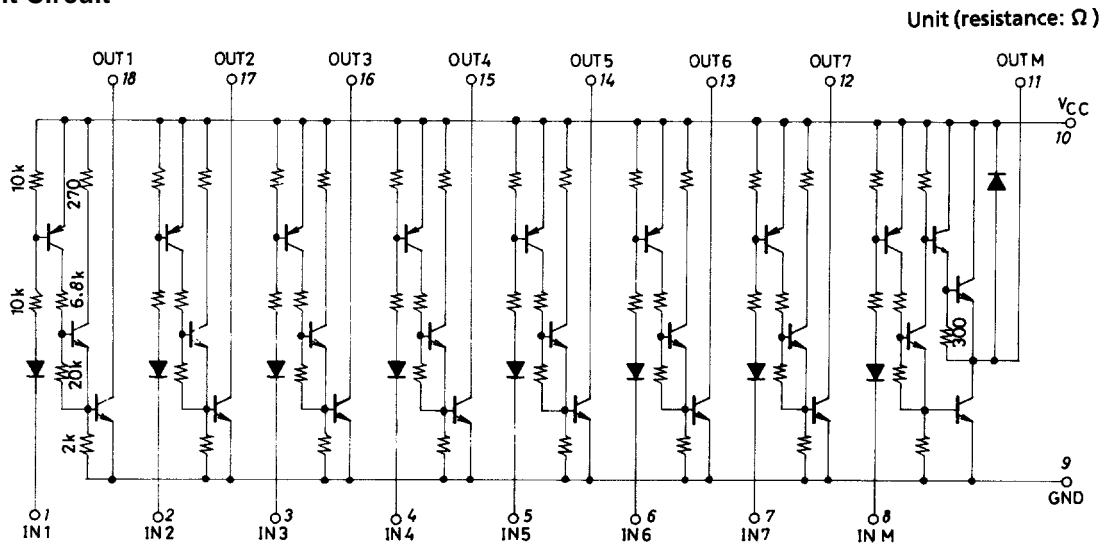

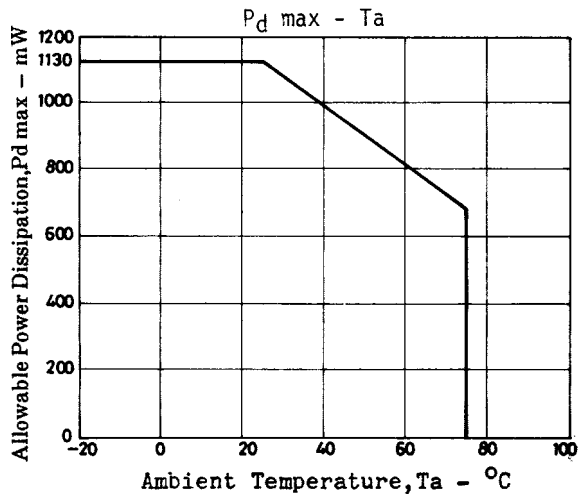

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of January, 2001. Specifications and information herein are subject to change without notice.