



SANYO Semiconductors

# DATA SHEET

## LV4910T — Bi-CMOS LSI Class-D Audio Power Amplifier BTL 2W × 2ch

### Overview

LV4910T is a stereo digital amplifier for portable equipment, for example notebook-PC, portable DVD and portable mini-speakers. It is characterized by the use of an original feedback technology to improve sound quality though it is Class-D amplifier, and does not need the LC filter in the output stage.

### Features

- D-class high-efficiency amplifier
- Low pop sound at SW changeover
- Differential input type

### Functions

- 2W stereo digital power amplifier
- Standby switch
- Mute switch
- Various protective circuits (over-current protective, thermal protective, and under-voltage circuits) incorporated

### Specifications

#### Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub> max		6	V
Allowable power dissipation	P <sub>d</sub> max	as mounted on the substrate	1.05	W
Operating temperature	T <sub>opr</sub>		-20 to +75	°C
Storage temperature	T <sub>stg</sub>		-40 to +150	°C

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# LV4910T

## Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	$V_{CC}$		5	V
Operation supply voltage range	$V_{CC\text{ opg}}$		2.5 to 5.5	V
Recommended load resistance	$R_L$	Speaker	4	$\Omega$

## Electrical Characteristics $T_a = 25^\circ\text{C}$ , $V_{CC} = 5\text{V}$ , $f = 1\text{kHz}$ , $R_L = 4\Omega$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Standby current	$I_{st}$	Current at ST ON			1	$\mu\text{A}$
Current at no signal	$I_{CCO1}$	At LC filter-less		12	20	mA
Current at Mute	$I_{CCO\text{ mute}}$	At Mute of speaker		10	16	mA
Voltage gain	VG	$V_O = 0\text{dBm}$	21	23	25	dB
Channel balance	$\Delta\text{VG}$	$V_O = 0\text{dBm}$	-1	0	1	dB
Output power	$P_O$	THD = 10%		2		W
Total harmonic distortion	THD	$P_O = 0.5\text{W}$ , DIN AUDIO		0.4	0.7	%
Output noise voltage	$V_{NO}$	$R_g = 0$ , DIN AUDIO		100	200	$\mu\text{V}$
Crosstalk	CT	$V_O = 0\text{dBm}$ , TUN 1kHz		-60	-40	dB
Ripple rejection ratio	RR	$f_r = 100\text{Hz}$ , $V_r = -10\text{dBm}$ , TUN 100Hz		-40	-30	dB
Common mode rejection ratio	CMRR	$V_O = 0\text{dBm}$ , DIN AUDIO		-60	-40	dB
Mute attenuation value	$V_{OFF}$	$V_O = 0\text{dBm}$ , DIN AUDIO		-80	-70	dB
Oscillation frequency	FPWM			300		kHz
Standby ON voltage sensitivity	$V_{PWROFF}$	Standby ON start voltage			1	V
Standby OFF voltage sensitivity	$V_{PWRON}$	Standby OFF start voltage	3			V
Mute ON voltage sensitivity	$V_{MUTEON}$	Mute ON start voltage			0.5	V
Mute OFF voltage sensitivity	$V_{MUTEOFF}$	Mute OFF start voltage	2			V



\* Electrical characteristics vary depending on the substrate layout and selection of external parts.

For measurement of the above characteristics, the coil : 22 $\mu\text{H}$  (Toko Kabushiki Kaisha made D63CB) is used.

## Package Dimensions


unit : mm (typ)

3259

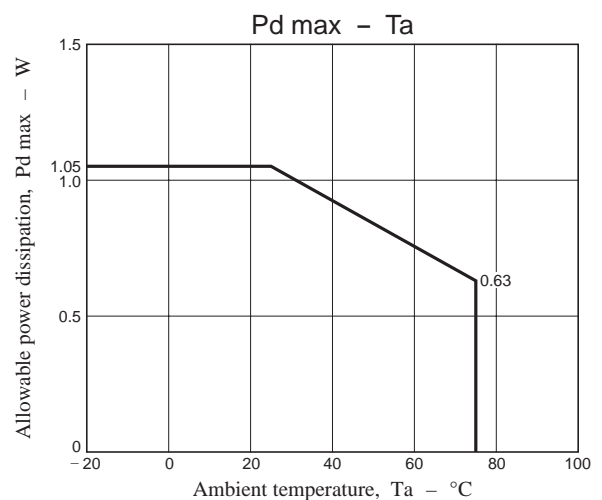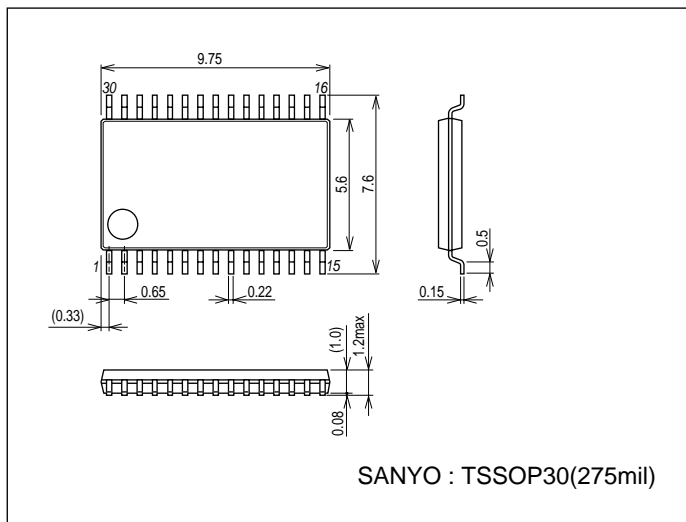

# LV4910T

## Block Diagram

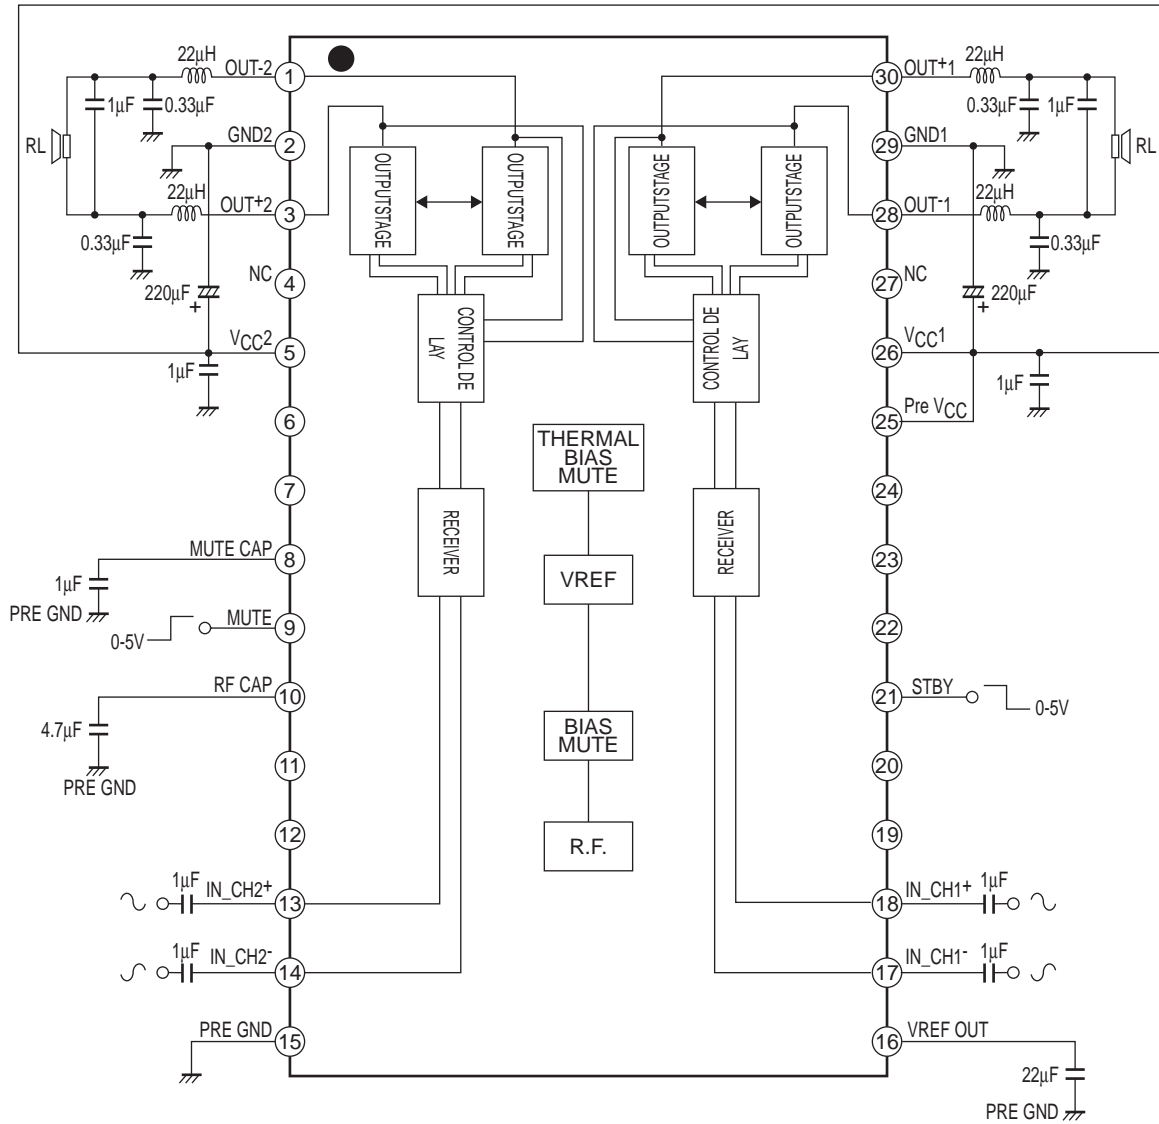

# LV4910T

## Pin Descriptions

Pin No.	Pin name	Pin voltage (V)	Pin description	Equivalent circuit
1 3 28 30	OUT-2 OUT+2 OUT-1 OUT+1	2.58	<ul style="list-style-type: none"> <li>Power outputs</li> </ul>	
2	GND2	0		
4	NC		<ul style="list-style-type: none"> <li>Non-connection</li> </ul>	
5	V <sub>CC2</sub>	5		
6	NC		<ul style="list-style-type: none"> <li>Non-connection</li> </ul>	
7	NC		<ul style="list-style-type: none"> <li>Non-connection</li> </ul>	
8	MUTE CAP	4.9	<ul style="list-style-type: none"> <li>Connection for the mute switch On/Off impulse noise reduction capacitor</li> </ul>	
9	MUTE		<ul style="list-style-type: none"> <li>Mute On/Off switch</li> <li>2 to 5.5V : Mute Off</li> <li>0 to 0.7V : Mute On</li> </ul>	
10	RF CAP	2.6	<ul style="list-style-type: none"> <li>Ripple filter reference</li> </ul>	
11	NC		<ul style="list-style-type: none"> <li>Non-connection</li> </ul>	
12	NC		<ul style="list-style-type: none"> <li>Non-connection</li> </ul>	
13 14 17 18	IN_ch2+ IN_ch2- IN_ch1- IN_ch1+	2.4	<ul style="list-style-type: none"> <li>Signal input</li> </ul>	









Continued on next page.

# LV4910T



Continued from preceding page.

Pin No.	Pin name	Pin voltage (V)	Pin description	Equivalent circuit
15	PRE GND	0		
16	VREF OUT	2.55	<ul style="list-style-type: none"> <li>• VREF amplifier reference</li> </ul>	
19	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
20	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
21	STBY		<ul style="list-style-type: none"> <li>• STBY On/Off switch</li> <li>• 0 to 1V : Power Off</li> <li>• 3 to 5.5V : Power On</li> </ul>	
22	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
23	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
24	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
25	PRE V <sub>CC</sub>	5		
26	V <sub>CC</sub> 1	5		
27	NC		<ul style="list-style-type: none"> <li>• Non-connection</li> </ul>	
29	GND1	0		

# LV4910T

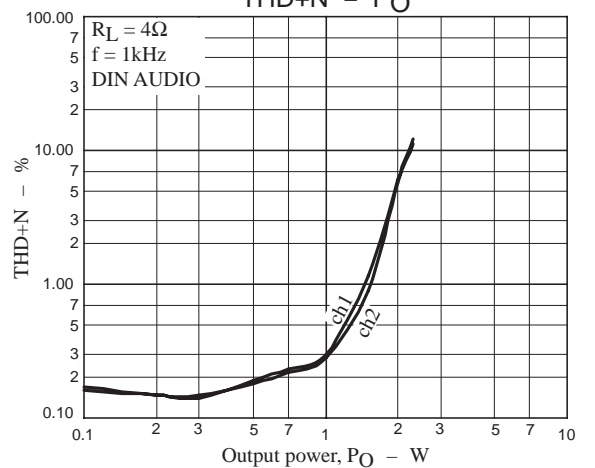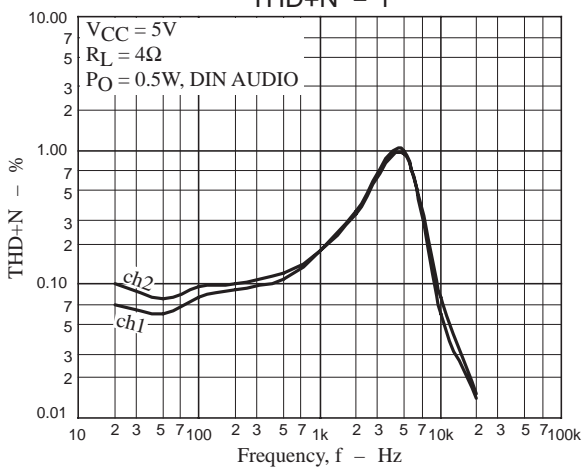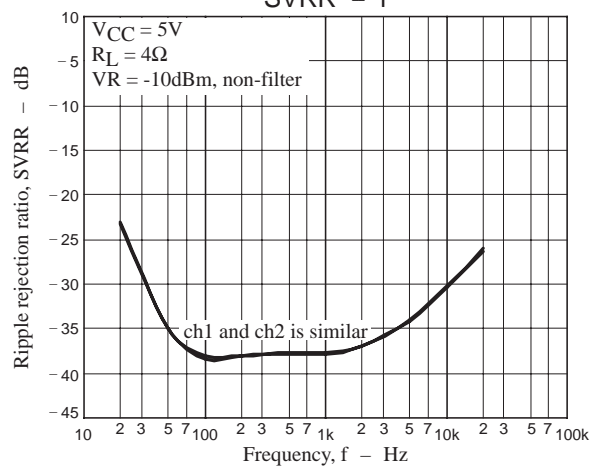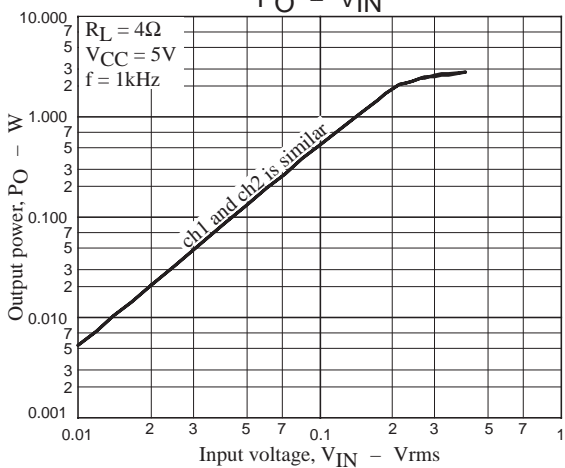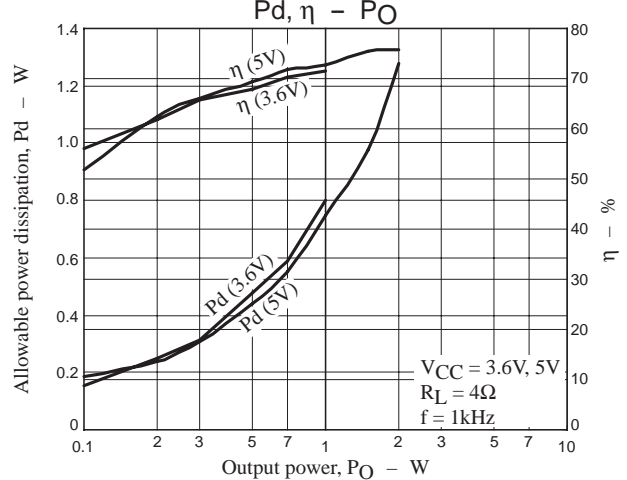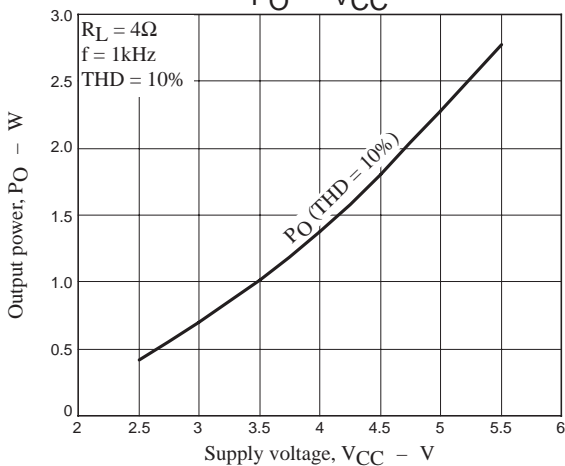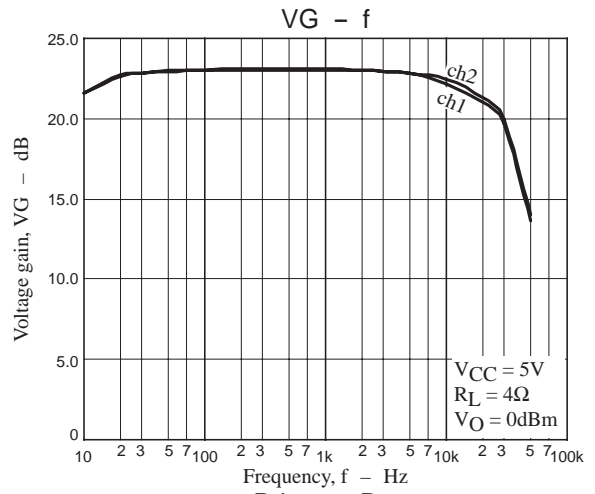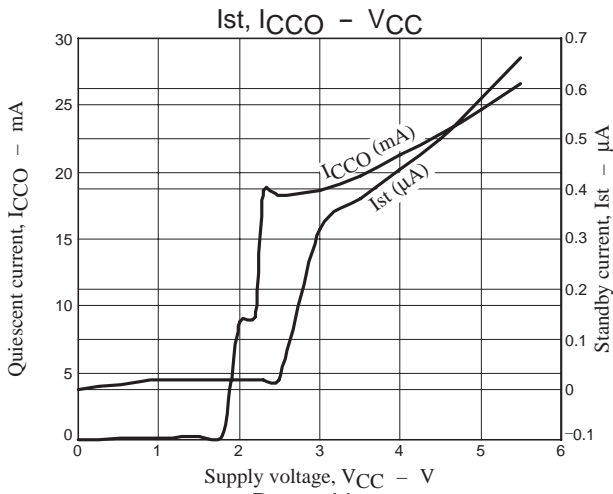

# LV4910T

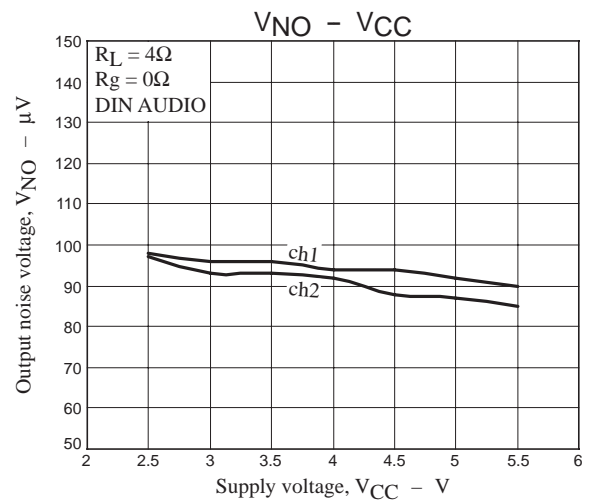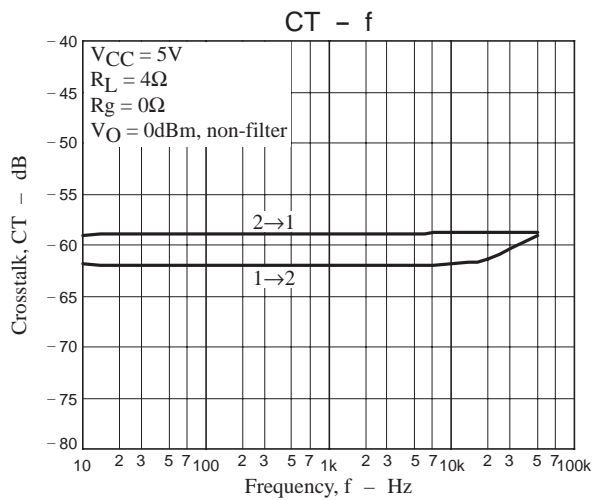

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of September, 2007. Specifications and information herein are subject to change without notice.