



SANYO Semiconductors

# DATA SHEET

An ON Semiconductor Company

## LV4924VH — Bi-CMOS IC Class-D Audio power Amplifier Power cell BTL 10W×2ch

### Overview

The LV4924VH is a 2-channel full-bridge driver for digital power amplifiers. It requires a PWM modulator IC in the previous stage. This IC is a power cell that takes in PWM signals as an input and is used to form a digital amplifier system for TVs, amusement equipment, and other such systems.

### Features

- BTL output, class D amplifier system
- High-efficiency class D amplifier
- Muting function reduces impulse noise at power on / off
- Protection circuits incorporated for over-current, thermal, supply voltage drop, output offset detector
- Built-in bootstrap diodes

### Specification

- Output 15W ( $V_D=16V$ ,  $R_L=8\Omega$ ,  $f_{IN}=1kHz$ , AES17, THD+N=10%)
- Output 10W ( $V_D=13V$ ,  $R_L=8\Omega$ ,  $f_{IN}=1kHz$ , AES17, THD+N=10%)
- Efficiency : 89% ( $V_D=13V$ ,  $R_L=8\Omega$ ,  $f_{IN}=1kHz$ ,  $P_O=10W$ )
- THD+N : 0.1% ( $V_D=13V$ ,  $R_L=8\Omega$ ,  $f_{IN}=1kHz$ ,  $P_O=1W$ , Filter: AES17)

### Maximum Ratings / Absolute Maximum Ratings /Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_D$	Externally applied voltage	22	V
Maximum PWM pin voltage	$V_{IN}$	PWM_A1,PWM_A2,PWM_B1,PWM_B2	6	V
Maximum pull-up pin voltage	$V_{pup\ max}$	NPN Open collector pin	20	V
Allowable power dissipation	$P_d\ max$	Exposed Die-pad Soldered *1	4.6	W
Maximum junction temperature	$T_j\ max$		150	°C
Operating temperature	$T_{opr}$		-25 to 75	°C
Storage temperature	$T_{stg}$		-50 to 150	°C

\*1 Customer bread board rev.1.0: 90.0mm × 70.0 mm × 1.6 mm (two-layer) Material: glass epoxy

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment. The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for new introduction or other application different from current conditions on the usage of automotive device, communication device, office equipment, industrial equipment etc. , please consult with us about usage condition (temperature, operation time etc.) prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

# LV4924VH

## Recommended Operating Range at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Recommended supply voltage range	V <sub>D</sub>	Externally applied voltage	9	13	20	V
Recommended PWM pin voltage	V <sub>IN</sub>	PWM_A1,PWM_A2,PWM_B1,PWM_B2	0	3.3	5	V
Recommended pull-up supply voltage	V <sub>pup</sub>	NPN Open collector pin	-	-	18	V
Recommended load resistance	R <sub>L</sub>	Speaker load	4	8	-	Ω

## Electrical Characteristics Ta=25°C, V<sub>D</sub>=13V, R<sub>L</sub>=8Ω, L=22μH (TOKO: A7040HN-220M), C=0.33μF (Matsuo: 553M6302-334K)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Quiescent current	I <sub>CCO</sub>	STBY=H, MUTE=H, f <sub>IN</sub> =384kHz, Duty=50%	30	38	45	mA
Current at MUTE	I <sub>mute</sub>	STBY=H, MUTE=L, V <sub>IN</sub> =GND	2	4	6	mA
Standby current	I <sub>st</sub>	STBY=L, MUTE=L, V <sub>IN</sub> =GND	-	-	10	μA
H input voltage	V <sub>IH</sub>	PWM_A, PWM_B, STBY, MUTE	2.3	-	5.5	V
L input voltage	V <sub>IL</sub>	PWM_A, PWM_B, STBY, MUTE	0	-	1.0	V
H input current	I <sub>IH</sub>	V <sub>IN</sub> =5V	-	-	60	μA
L input current	I <sub>IL</sub>	V <sub>IN</sub> =GND	-20	-	-	μA
Output pin leakage current	I <sub>OFF</sub>	NPN Open collector output OFF-stage 5.0V pull-up	-	-	1	μA
Output pin current	I <sub>OL</sub>	NPN Open collector output ON-stage, V <sub>OL</sub> =0.4V	0.5	-	-	mA
Power Tr ON resistance *1	R <sub>ds ON</sub>	I <sub>d</sub> =1A	-	220	-	mΩ
Turn ON delay time	t <sub>d ON</sub>	f <sub>IN</sub> =384kHz, Duty=50%	-	30	50	ns
Turn OFF delay time	t <sub>d OFF</sub>	f <sub>IN</sub> =384kHz, Duty=50%	-	30	50	ns
Rise-up time	t <sub>r</sub>	f <sub>IN</sub> =384kHz, Duty=50%	-	5	20	ns
Fall time	t <sub>f</sub>	f <sub>IN</sub> =384kHz, Duty=50%	-	5	20	ns

\*1 : The maximum power transistor ON resistance(R<sub>DS(ON)</sub>) is 270mΩ(design guarantee value).


Note : The value of these characteristics were measured in SANYO test environment. The actual value in an end system will vary depending on the printed circuit board pattern, the components used, and other factors.

## Electrical Characteristics

(Reference value: The table below shows the reference value when FPGA equivalent to the Sanyo reference model is used.)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Output 1	P <sub>O1</sub>	THD+N=10%, f <sub>IN</sub> =1kHz, AES17	-	10	-	W
Output 2	P <sub>O2</sub>	V <sub>D</sub> =16V, THD+N=10%, f <sub>IN</sub> =1kHz, AES17	-	15	-	W
Total harmonic distortion	THD+N	P <sub>O</sub> =1W, f <sub>IN</sub> =1kHz, AES17	-	0.1	-	%

Note : The value of these characteristics were measured in SANYO test environment. The actual value in an end system will vary depending on the printed circuit board pattern, the components used, and other factors.

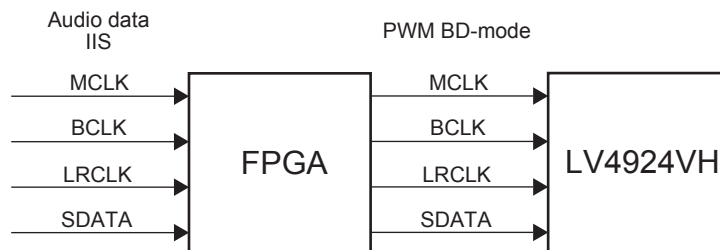


# LV4924VH


## Package Dimensions

unit : mm (typ)

3417

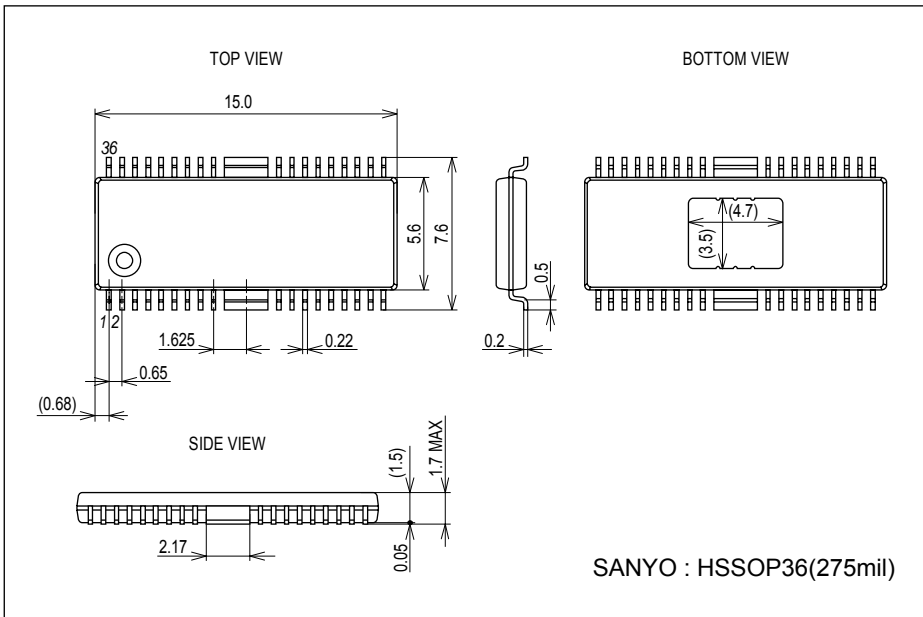


## Pin Assignment

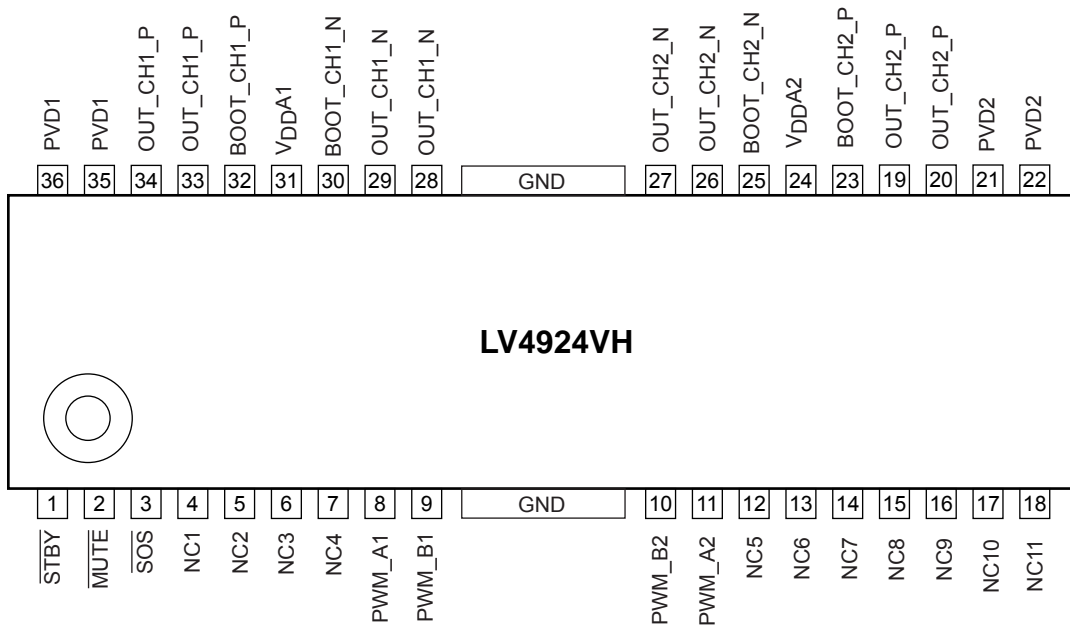

Top view


## Reference data for thermal design

Overall view of substrate

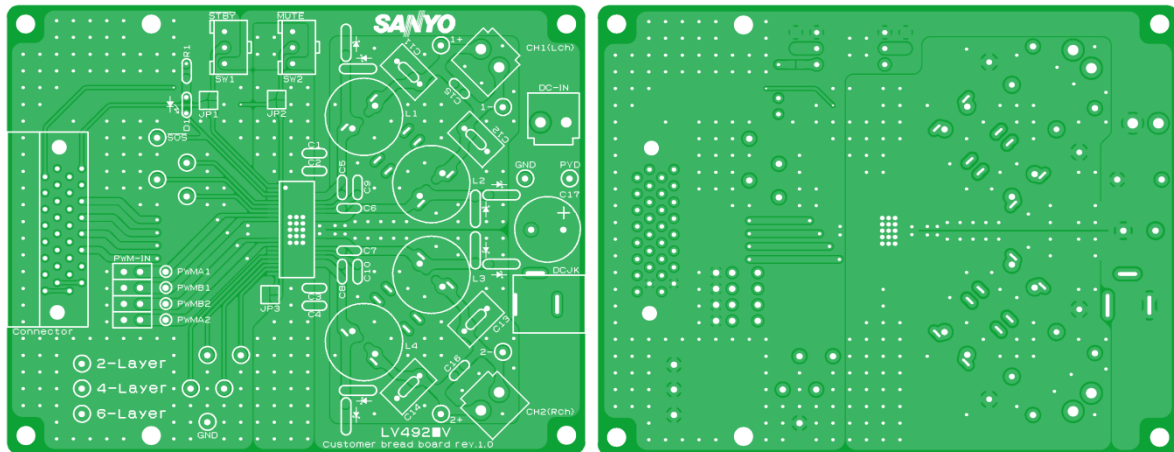

Mounted on a specified board (Customer bread board rev.1.0): 90.0mm × 70.0 mm × 1.6 mm (two-layer) Material: glass epoxy


Pd max-Ta

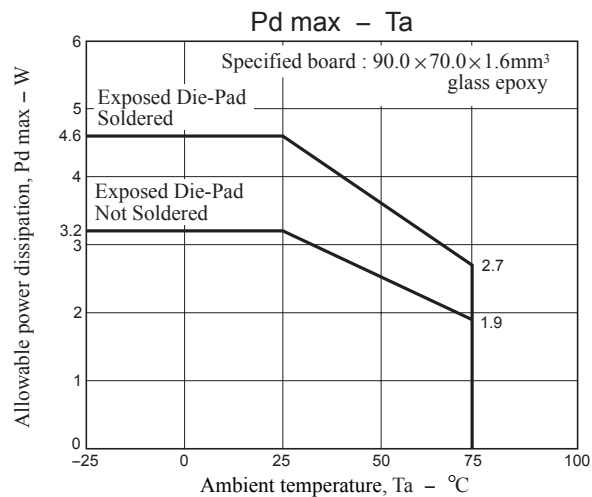

- Data of the Exposed Die-Pad (heat spreader) substrate as mounted represents the value in the state where the exposed Die-Pad surface is wet for 90% or more.
- For the set design, derating design should be made while ensuring allowance.  
Stresses to become an object of derating are the voltage, current, junction temperature, power loss and mechanical stresses including vibration, impact and tension.  
Accordingly, these stresses must be as low or small as possible in the design.  
Approximate targets for general derating are as follows:
  - Maximum value 80% or less for the voltage rating.
  - Maximum value 80% or less for the current rating.
  - Maximum value 80% or less for the temperature rating.
- After set design, be sure to verify the design with the product.  
Also check the soldered state of the Exposed Die-Pad, etc. and verify the reliability of the soldered joint.  
If any void or deterioration is observed in these sections, thermal conduction to the substrate is deteriorated, resulting in thermal damage of IC.

# LV4924VH

## Block Diagram

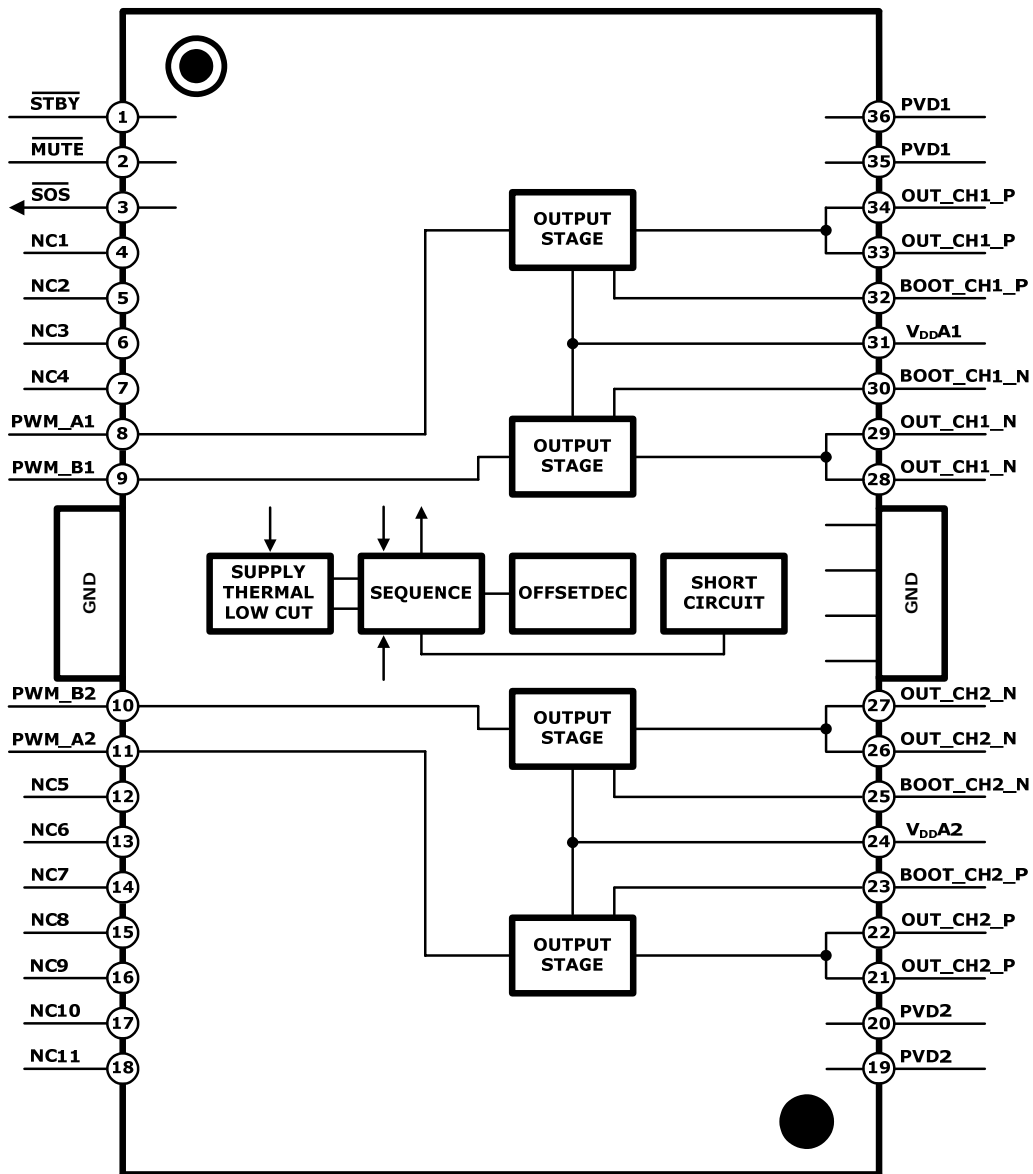

## Pin Equivalent Circuit

Pin No.	Pin name	I/O	Description	Equivalent Circuit
1	STBY	I	Standby mode control	
2	MUTE	I	Muting control	

Continued on next page.

# LV4924VH

Continued from preceding page.

Pin No.	Pin name	I/O	Description	Equivalent Circuit
3	$\overline{\text{SOS}}$	I	Internal protection circuit detection output (OR output of the thermal detection, over-current, voltage drop protection, offset detection circuit) of an NPN open collector output type	
4	NC1	-	Non connection	
5	NC2	-	Non connection	
6	NC3	-	Non connection	
7	NC4	-	Non connection	
8	PWM_A1	I	PWM input (plus input) of OUT_CH1_P	
9	PWM_B1	I	PWM input (negative input) of OUT_CH1_N	
10	PWM_B2	I	PWM input (negative input) of OUT_CH2_N	
11	PWM_A2	I	PWM input (plus input) of OUT_CH2_P	
FIN	GND	-	ground	
12	NC5	-	Non connection	
13	NC6	-	Non connection	
14	NC7	-	Non connection	
15	NC8	-	Non connection	
16	NC9	-	Non connection	
17	NC10	-	Non connection	
18	NC11	-	Non connection	
19, 20	PVD2	-	Power pin	
21, 22	OUT_CH2_P	O	Output pin, Channel 2 plus	
26, 27	OUT_CH2_N	O	Output pin, Channel 2 minus	
28, 29	OUT_CH1_N	O	Output pin, Channel 1 minus	
33, 34	OUT_CH1_P	O	Output pin, Channel 1 plus	
23	BOOT_CH2_P	I/O	Bootstrap I / O pin, channel 2 plus	
24	V <sub>DDA2</sub>	O	Internal power supply decoupling capacitor connection	
25	BOOT_CH2_N	I/O	Bootstrap I / O pin, channel 2 minus	
30	BOOT_CH1_N	I/O	Bootstrap I / O pin, channel 1 minus	
31	V <sub>DDA1</sub>	O	Internal power supply decoupling capacitor connection	
32	BOOT_CH1_P	I/O	Bootstrap I / O pin, channel 1 plus	
35, 36	PVD1	-	Power pin	

# LV4924VH

## Description of functions

### System Standby

The built-in 5V regulator is turned ON / OFF by changing over "H" and "L" of " $\overline{\text{STBY}}$ ". The regulator is turned OFF with " $\overline{\text{STBY}}$ " at "L" and ON with " $\overline{\text{STBY}}$ " at "H".

This signal also causes initialization of the internal logic initialization with "L" and the normal mode with "H".

### MUTE Function


The MUTE function is mainly for muting of the output and for reduction of pop noise at power ON.

### Muting the output

The output PWM can be turned ON / OFF by changing over "H" and "L" of " $\overline{\text{MUTE}}$ ". The PWM output is stopped (putting all of PWM outputs at high impedance) with " $\overline{\text{MUTE}}$ " at "L" and enters the normal operation mode with " $\overline{\text{MUTE}}$ " at "H".

### Sequence at power ON

To reduce the pop noise, turn ON power supply while controlling in the following timing (PWM=BD mode). In particular, all of inputs of PWM must be held at "L" at canceling of MUTE function.

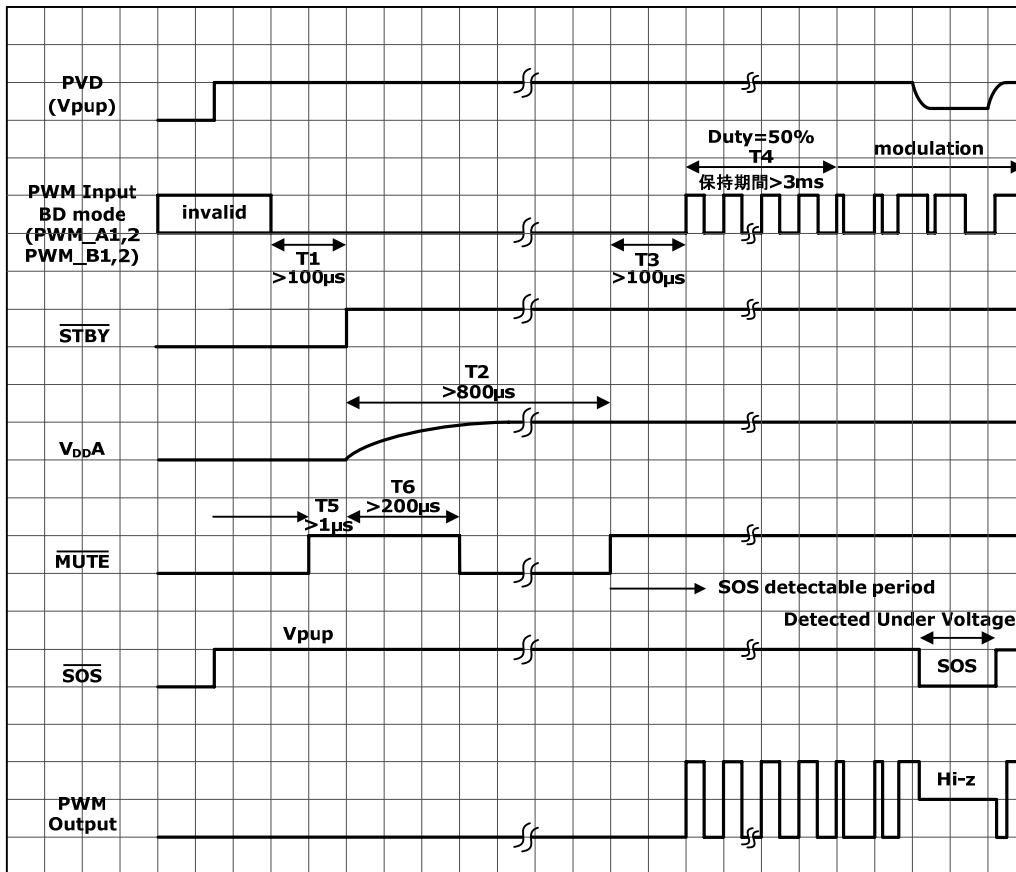


\* Please observe the following items for the destruction prevention of the output transistor.

- (1) Under all conditions must control the period at the "H" level about the PWM input so as not to become more than  $200\mu\text{s}$  when period of the "H" level MUTE and STBY signals both.

# LV4924VH

## Sequence at power OFF

To reduce the pop noise, turn OFF power supply while controlling in the following timing (PWM=BD mode).

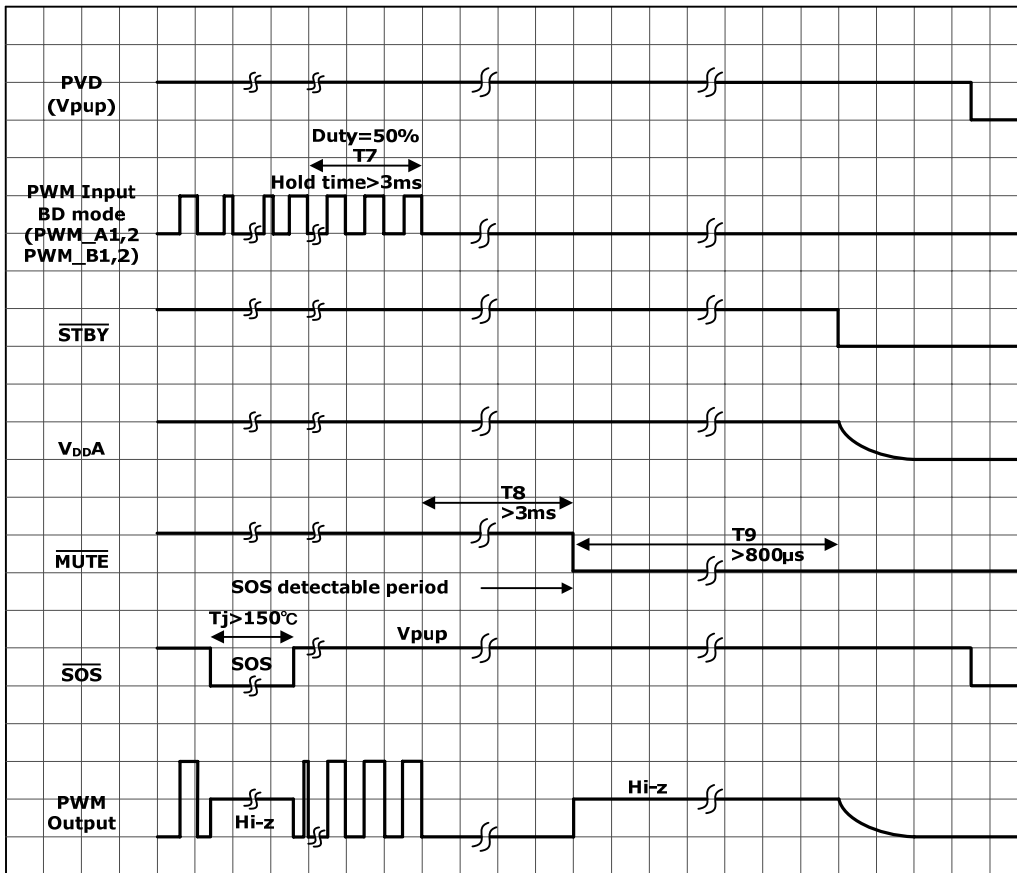


## Protection Circuit

LV4924VH incorporates the over-current protection circuit, thermal protection circuit, supply voltage drop protection circuit and output offset detection protection circuit. Activation of any one of these circuits causes the SOS output pin to become active and thus "L".

### Over-current protection circuit

This circuit is a protection circuit\* to protect the output transistor from the over-current and compatible with any mode of lightning, ground fault, and load short-circuit.

Protection is done when the detection current value (about 6A) set inside IC is reached, forcing the output transistor to remain OFF for about 20µs. After forced OFF, the transistor returns automatically to the normal operation and performs protection again if the over-current continues to flow.

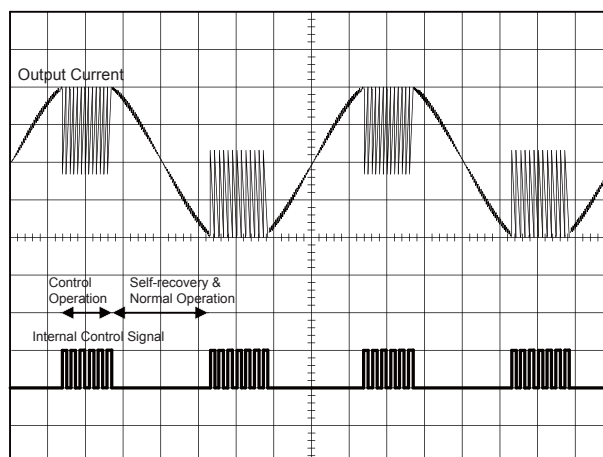

\* The over-current protection circuit functions only to avoid the abnormal state, such as output short-circuit, etc., temporarily, and does not guarantee to offer the protection to prevent damage to IC.




## LV4924VH

### Thermal protection circuit

This circuit detects the temperature (150°C or more) inside LSI for protection. While this protection circuit is active, the output Tr is turned OFF on both high- and low-sides, putting the output in the high-impedance state. This operation is also provided with the hysteresis.

### Supply voltage drop protection circuit

To avoid unstable operation at low voltages, this circuit monitors the PVD pin voltage and turns ON the amplifier when this voltage exceeds the Attack voltage ( $V_D = 7V$  typ.). In addition, to avoid unstable operation when the PVD pin voltage has dropped because of certain reasons, the Recover voltage ( $V_D = 6V$  typ.) is set. Both Attack and Recover voltages have the hysteresis (about 1V) to prevent continuous ON / OFF operation of the supply voltage drop protection circuit.

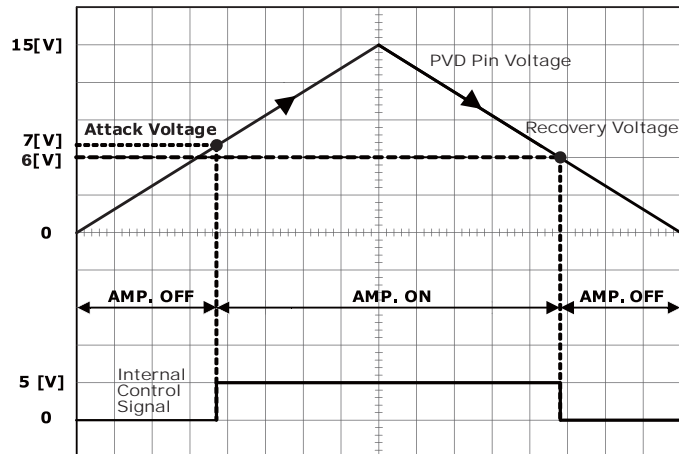


### Output offset detection protection circuit

This circuit is a protection circuit intended to alleviate burn of the loudspeakers when DC outputs to the BTL output for a certain period or more.

The circuit detects the case in which each BTL input of each channel continues to disagree (for about 300ms), turns OFF the output Tr on both high- and low-sides, and puts the output in the high-impedance state.

# LV4924VH

## Application Circuit








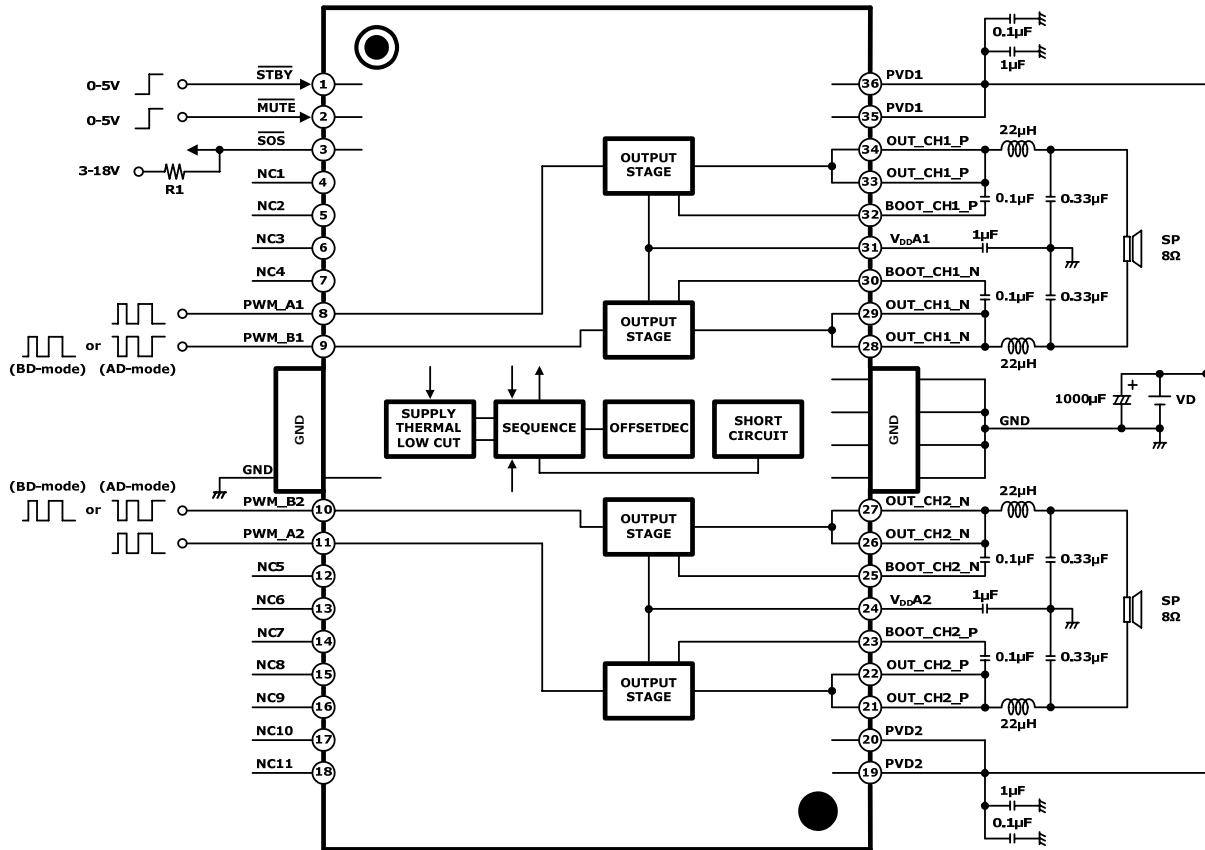


\*  $\overline{\text{SOS}}$  of pin 3 is the open collector output.









Therefore, to monitor this output with CPU, it is necessary to pull up (resistor: R1) at power supply of CPU, etc. When the output is not to be used (not to be monitored), it is not necessary to pull-up the resistor.

# LV4924VH









Characteristics Data: L=22 $\mu$ H (TOKO: A7040HN-220M), C=0.33 $\mu$ F (Matsuo: 553M6302-334K)

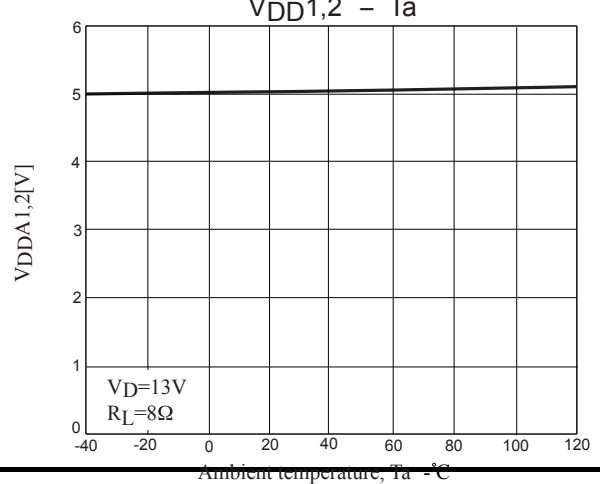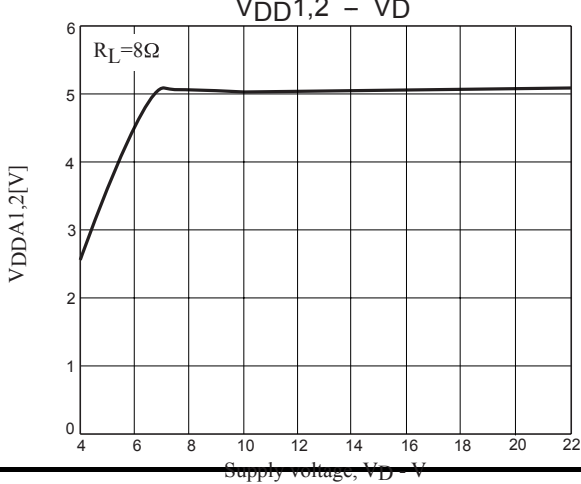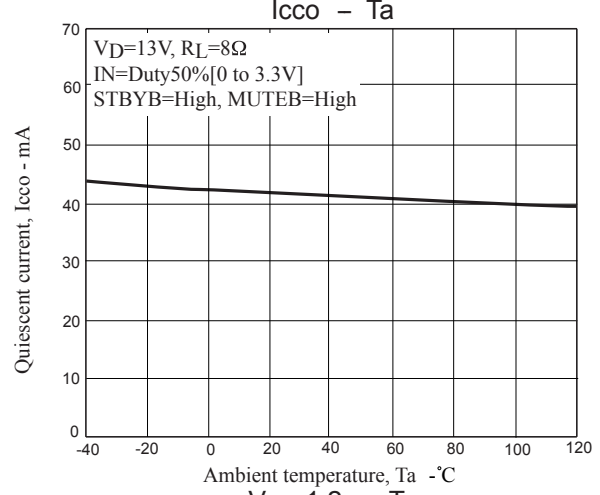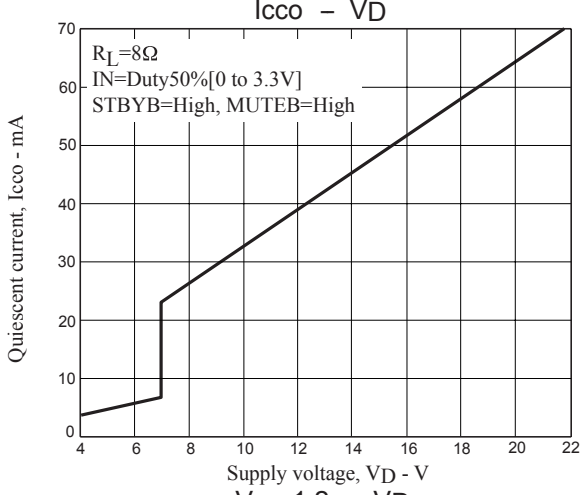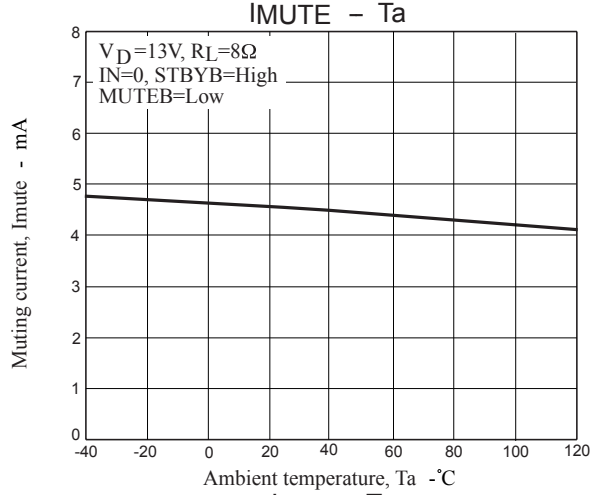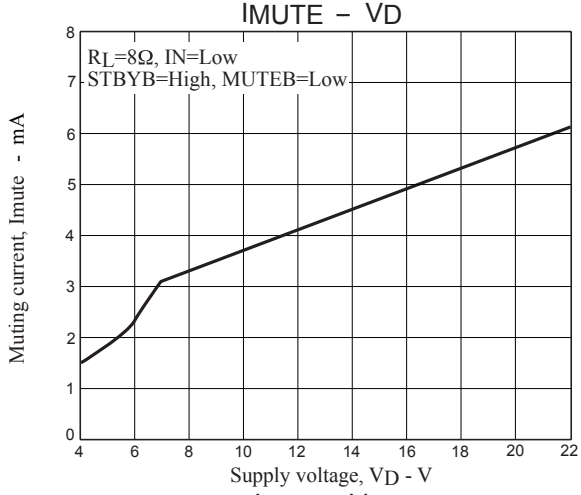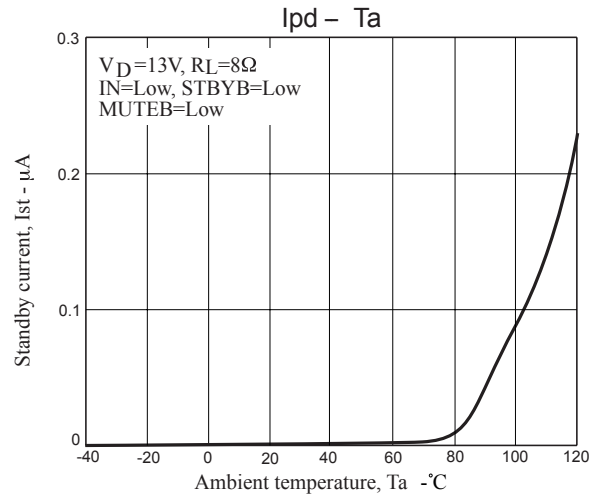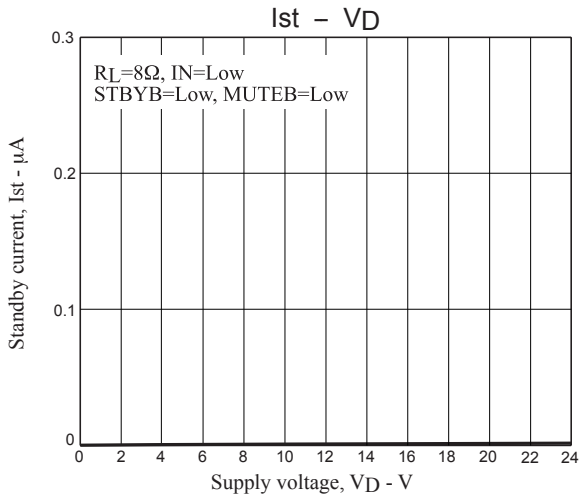







# LV4924VH

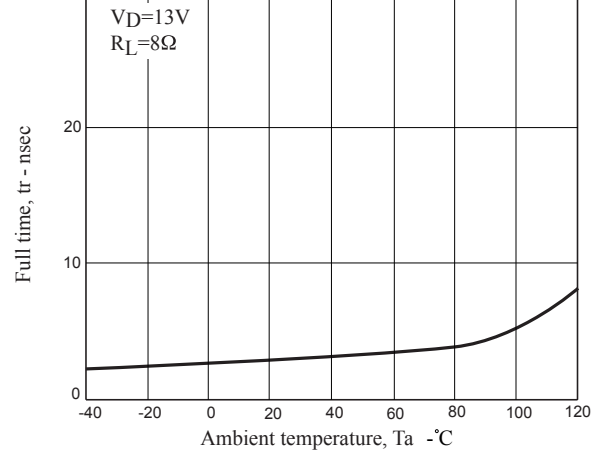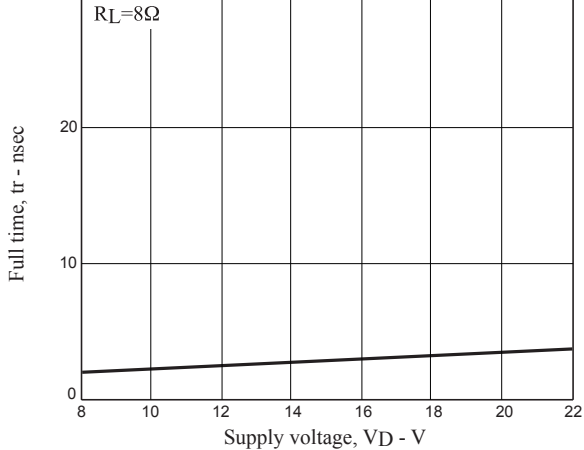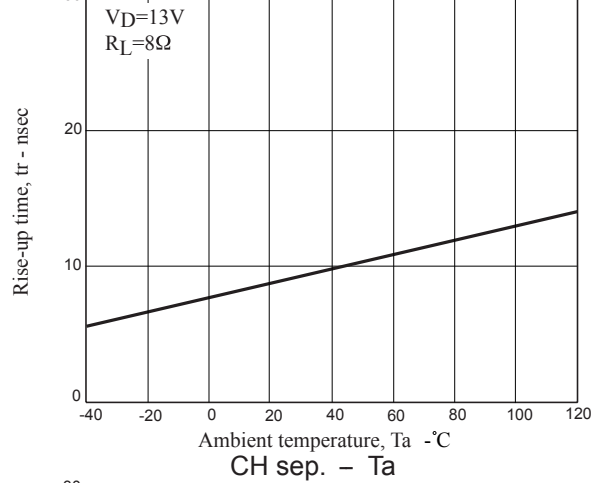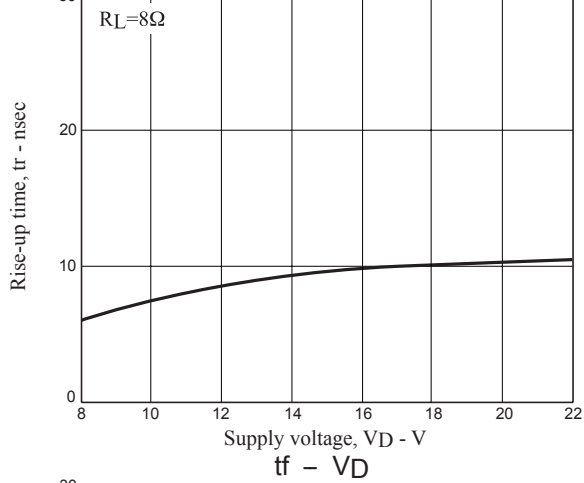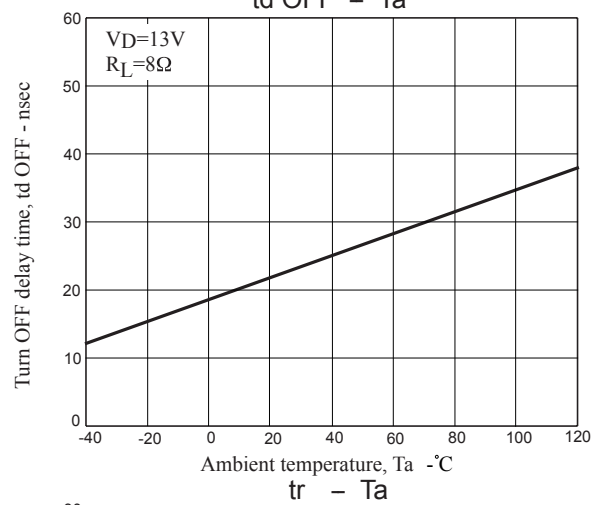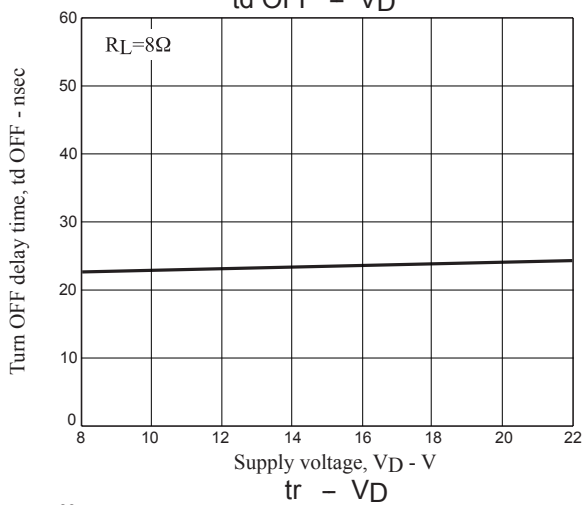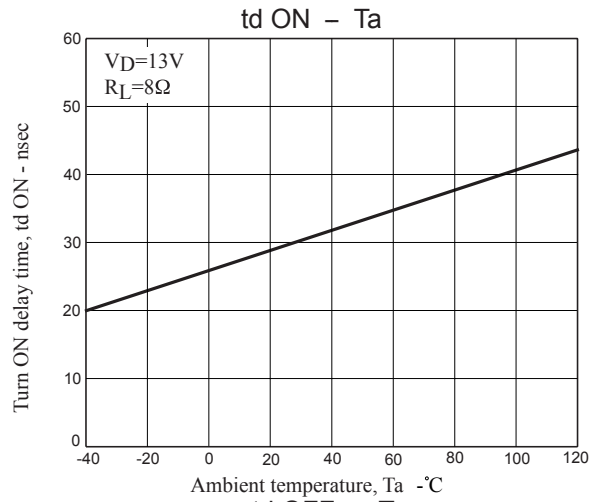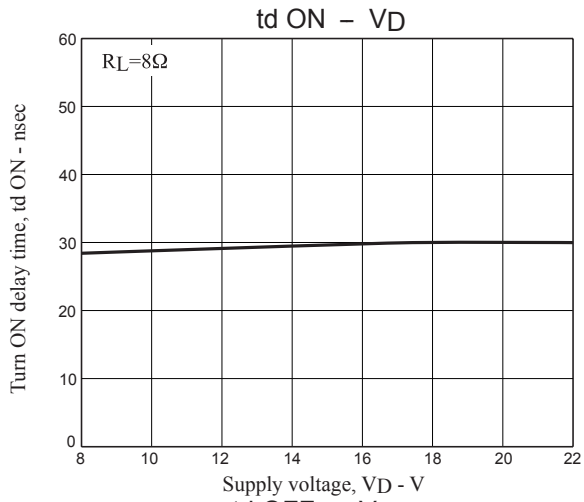

# LV4924VH

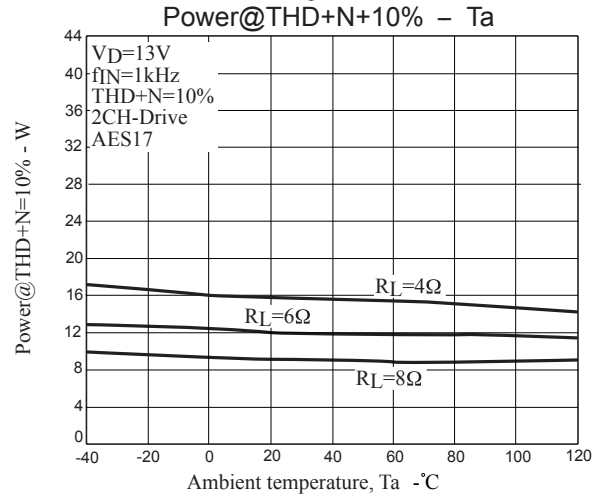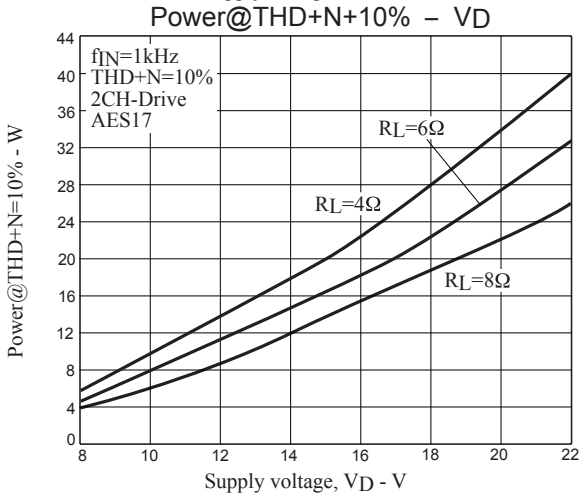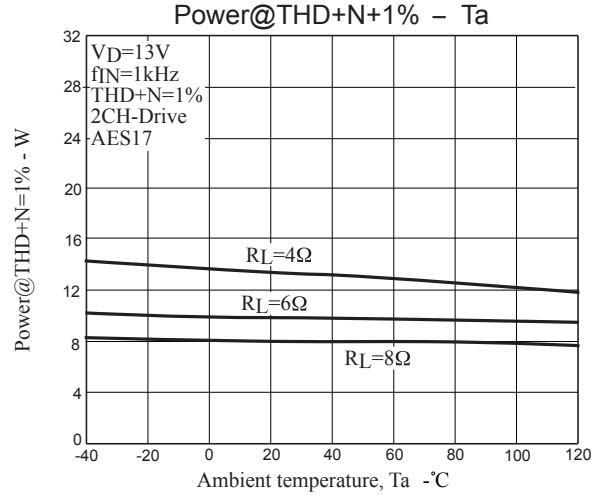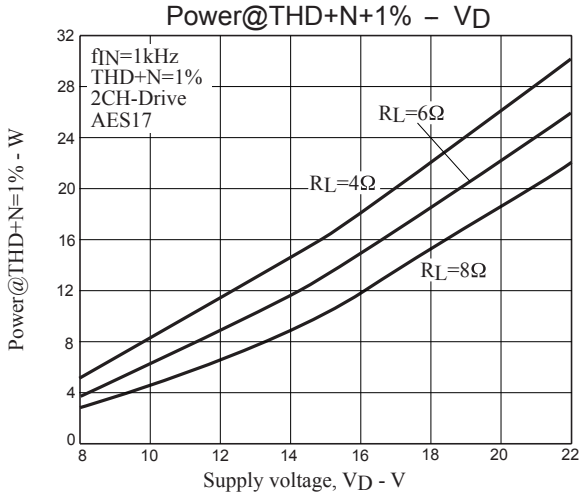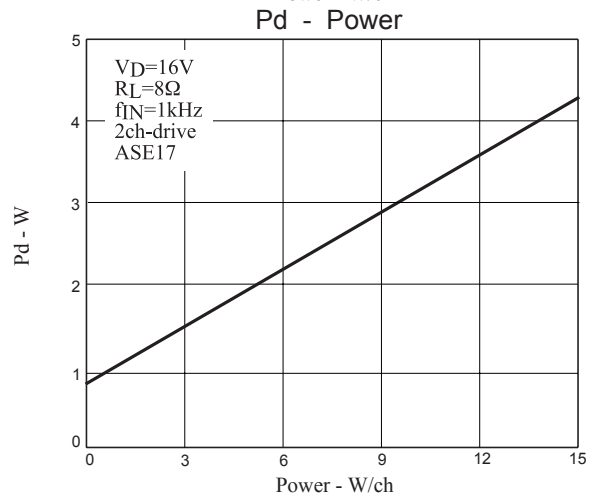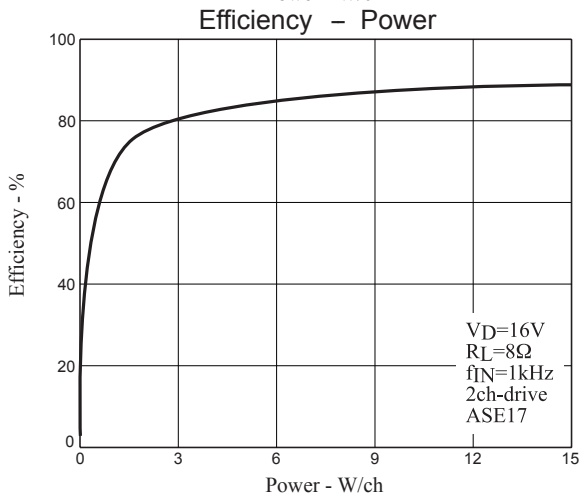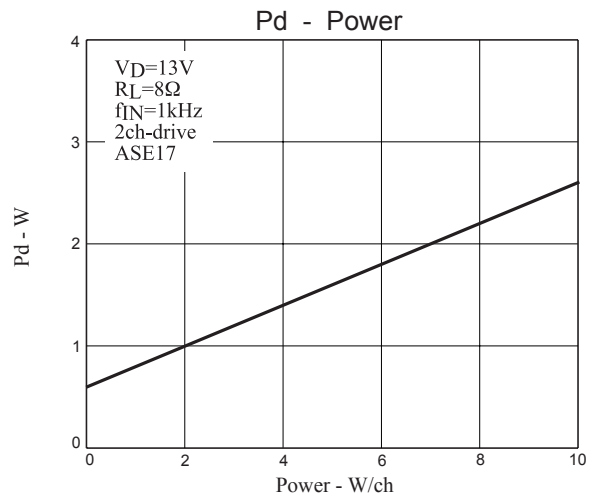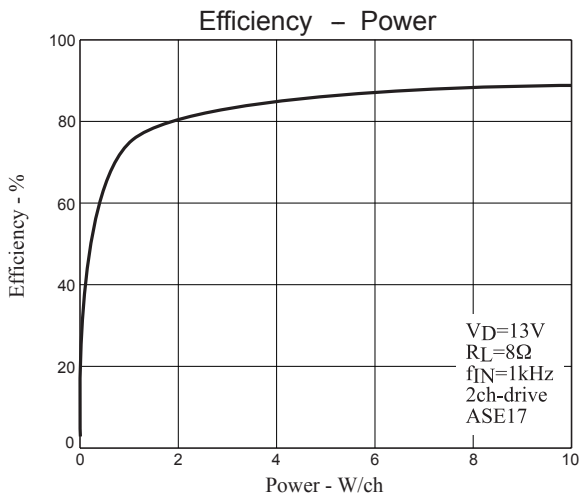

# LV4924VH

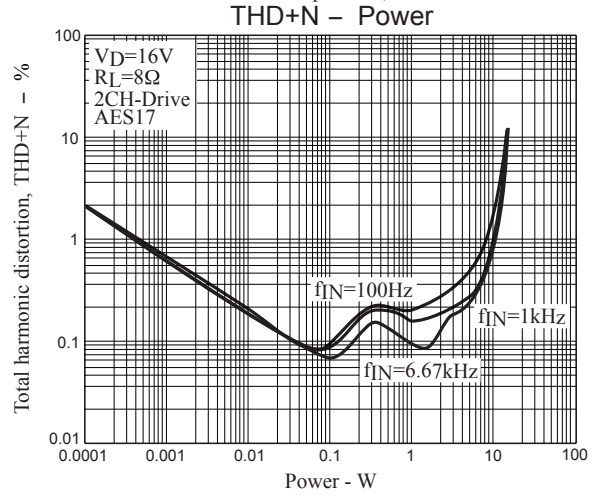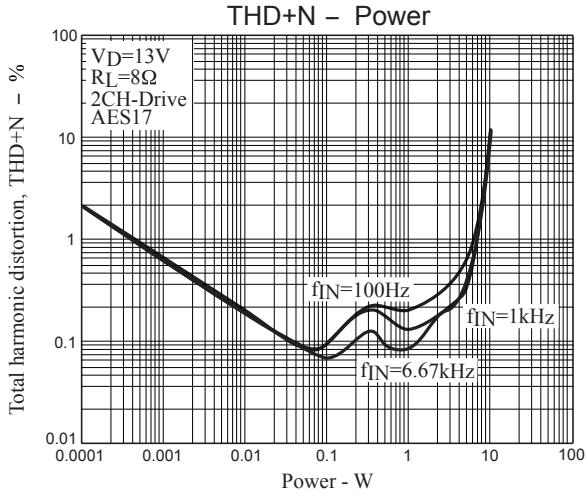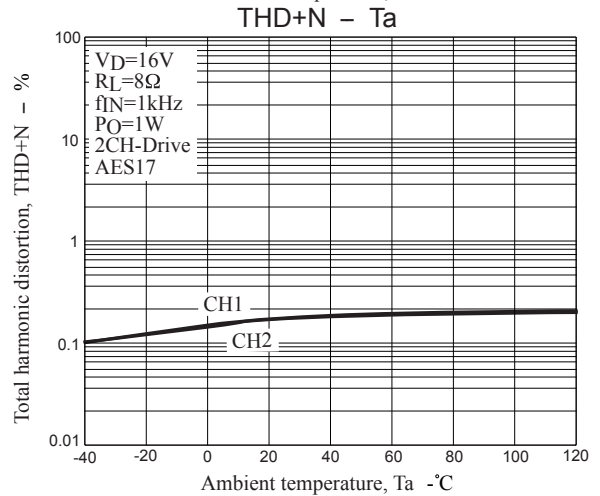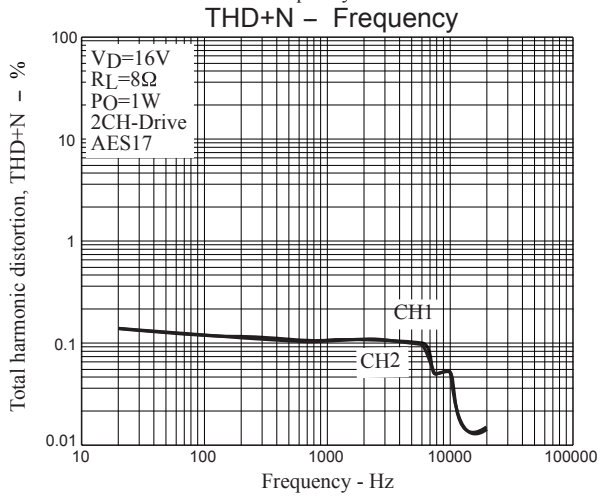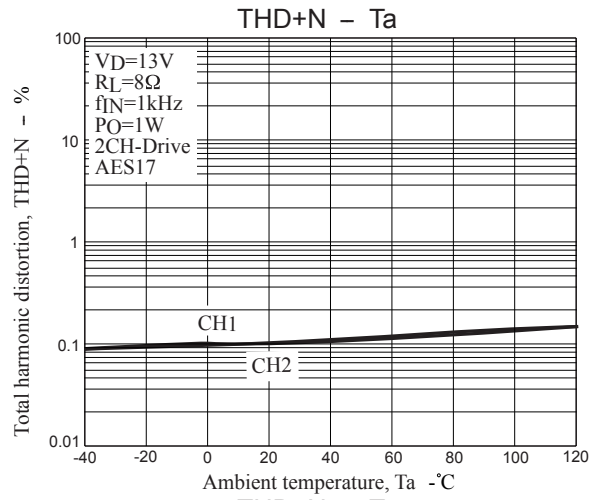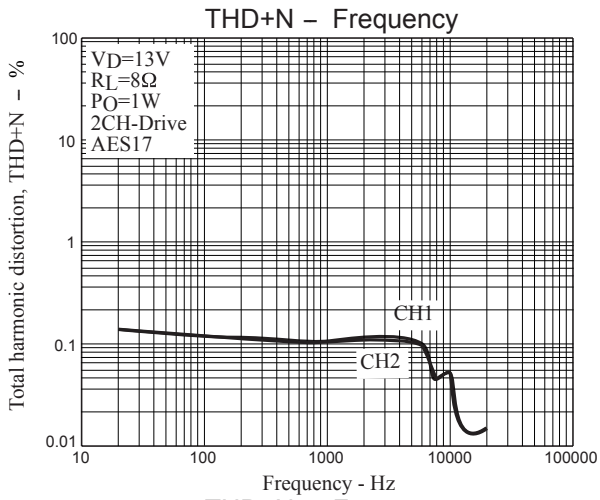

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of November, 2011. Specifications and information herein are subject to change without notice.