

# M52757FP

## Wide Band Analog Switch

REJ03F0195-0201

Rev.2.01

Mar 31, 2008

### Description

The M52757FP is a semiconductor integrated circuit for the RGB interface. The device features switching signals input from two types of image sources and outputting the signals to the CRT display, etc. The frequency band of video signals is 250 MHz, acquiring high-resolution images, and are optimum as an interface IC with high-resolution CRT display and various new media.

It includes Sync-separator, Video-signal-detector, and Sync-on G detector (SOG-DET.).

### Features

- Frequency band width: R.G.B 250 MHz
- Input level: R.G.B 0.7 V<sub>P,P</sub> (Typ.)
- Video signal-detector
  - Responsive frequency: to 50 MHz
  - Input level: 0.7 V<sub>P,P</sub> (Typ.)
  - Detected level: 150 mV (Typ.)  
(Measure bottom to DET. level)
- Only the G channel is proved with buffer video output.
- It is possible to save the consumption current by stopping current supply to Pin 2, 4, 6, 20, 24, 30, 33, 35 because SOG-DET can be operated with only V<sub>CC5</sub> (Pin 15) as power save mode.
- Include Sync Separation, Video signal detector, and Sync-on G detector.

### Application


Display monitor

### Recommended Operating Condition


Supply voltage range: 4.75 to 5.5 V

Rated voltage: 5.0 V

### Block Diagram

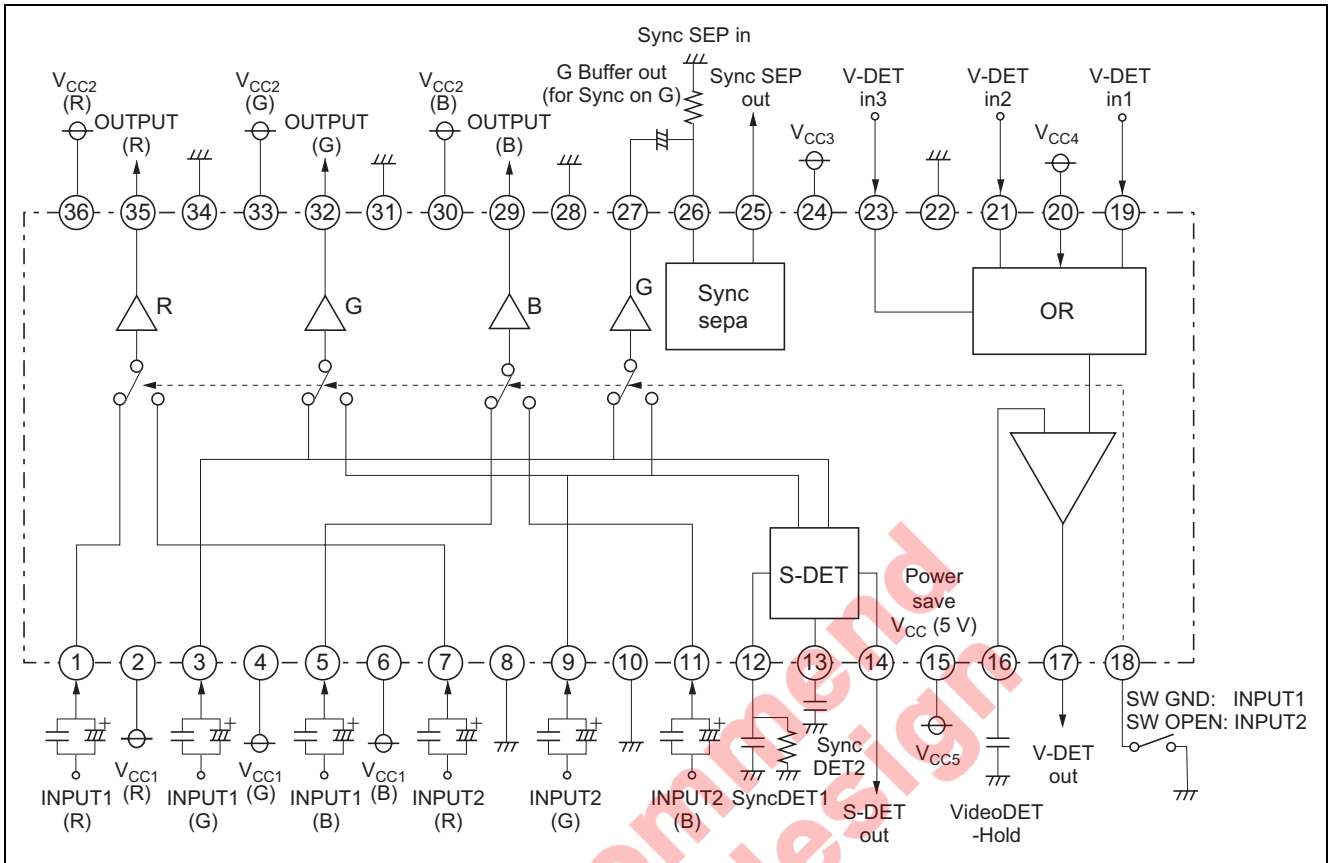


### Pin Arrangement

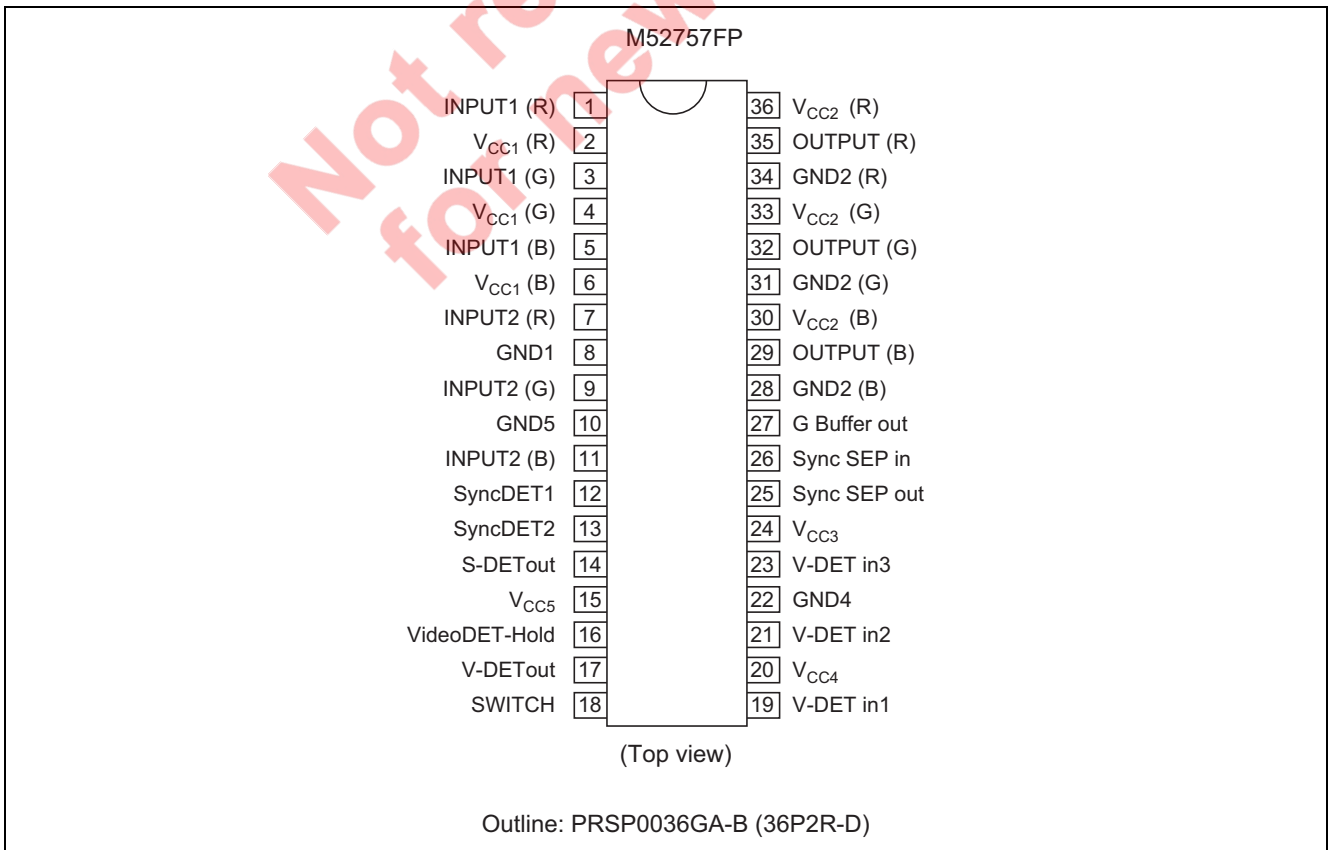

## Absolute Maximum Ratings

(Ta = 25°C)

Item	Symbol	Ratings	Unit
Supply voltage	V <sub>CC</sub>	7.0	V
Power dissipation	P <sub>d</sub>	1068	mW
Operating temperature	T <sub>opr</sub>	-20 to +85	°C
Storage temperature	T <sub>stg</sub>	-40 to +150	°C
Recommended operating supply voltage	V <sub>opr</sub>	5.0	V
Recommended operating supply voltage range	V <sub>opr'</sub>	4.75 to 5.5	V
Electrostatic discharge	S <sub>arge</sub>	±200	V

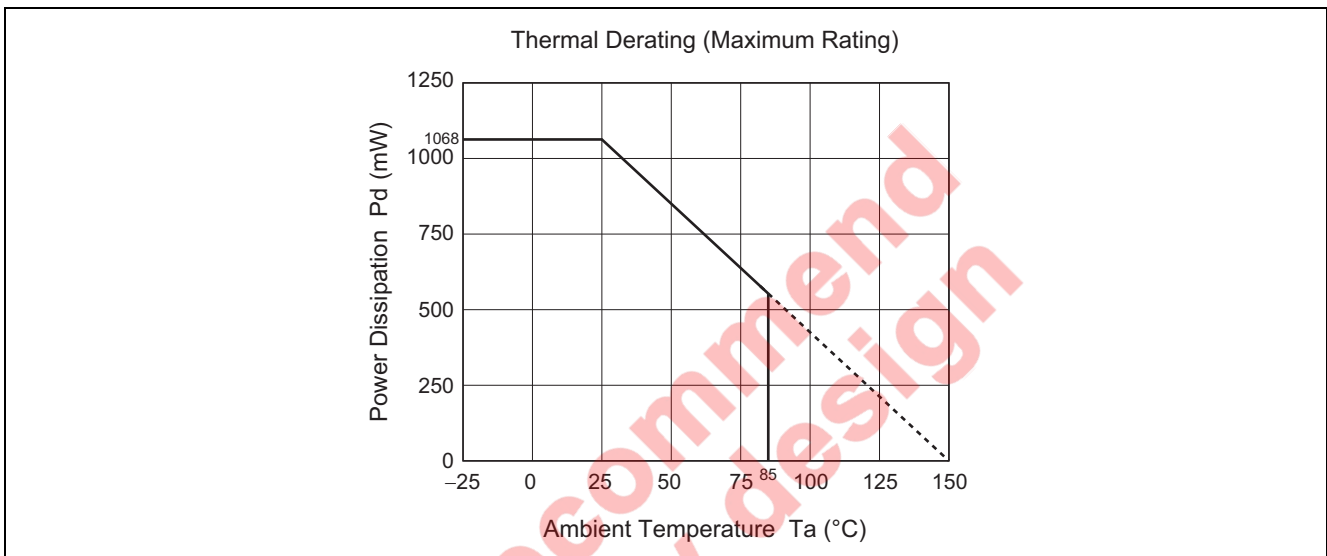

## Electrical Characteristics

(V<sub>CC</sub> = 5 V, T<sub>a</sub> = 25°C)

Item	Symbol	Limits			Unit	Test Point (s)	Input	SW18
		Min	Typ	Max				
Circuit current 1	I <sub>CC1</sub>	45	65	85	mA	A	—	OPN
Circuit current 2	I <sub>CC5</sub>	3	5	7	mA	15	—	OPN
<RGB SW>								
Output DC voltage 1	V <sub>dc1</sub>	1.1	1.5	1.9	V	29, 32, 35	—	OPN
Output DC voltage 2	V <sub>dc2</sub>	1.1	1.5	1.9	V	29, 32, 35	—	GND
Output DC voltage 3	V <sub>dc3</sub>	0.5	0.9	1.3	V	27	—	OPN
Output DC voltage 4	V <sub>dc4</sub>	0.5	0.9	1.3	V	27	—	GND
Maximum allowable input 1	V <sub>I</sub> max1	1.4	1.6	—	V <sub>P-P</sub>	1, 3, 5	1, 3, 5	GND
Maximum allowable input 2	V <sub>I</sub> max2	1.4	1.6	—	V <sub>P-P</sub>	7, 9, 11	7, 9, 11	GND
Voltage gain 1	G <sub>v1</sub>	-0.1	0.5	1.1	dB	29, 32, 35	1, 3, 5	GND
Relative voltage gain 1	ΔG <sub>v1</sub>	-0.6	0	0.6	dB	Relative to measured values above		
Voltage gain 2	G <sub>v2</sub>	-0.1	0.5	1.1	dB	29, 32, 35	7, 9, 11	OPN
Relative voltage gain 2	ΔG <sub>v2</sub>	-0.6	0	0.6	dB	Relative to measured values above		
Voltage gain 3	G <sub>v3</sub>	-0.6	0	0.6	dB	27	3	GND
Voltage gain 4	G <sub>v4</sub>	-0.6	0	0.6	dB	27	9	OPN
Freq. characteristic 1 (100 MHz)	F <sub>c1</sub>	-1.0	0	1.0	dB	29, 32, 35	1, 3, 5	GND
Relative Freq. characteristic 1	ΔF <sub>c1</sub>	-1.0	0	1.0	dB	Relative to measured values above		
Freq. characteristic 2 (100 MHz)	F <sub>c2</sub>	-1.0	0	1.0	dB	29, 32, 35	7, 9, 11	OPN
Relative Freq. characteristic 2	ΔF <sub>c2</sub>	-1.0	0	1.0	dB	Relative to measured values above		
Freq. characteristic 1 (250 MHz)	F <sub>c3</sub>	-3.0	-1.5	1.0	dB	29, 32, 35	1, 3, 5	GND
Freq. characteristic 2 (250 MHz)	F <sub>c4</sub>	-3.0	-1.5	1.0	dB	29, 32, 35	7, 9, 11	OPN
Crosstalk between 2 inputs 1 (10 MHz)	CTI1	—	-60	-50	dB	29, 32, 35	1, 3, 5	GD to OP
Crosstalk between 2 inputs 2 (10 MHz)	CTI2	—	-60	-50	dB	29, 32, 35	7, 9, 11	OP to GD
Crosstalk between 2 inputs 3 (100 MHz)	CTI3	—	-40	-35	dB	29, 32, 35	1, 3, 5	GD to OP
Crosstalk between 2 inputs 4 (100 MHz)	CTI4	—	-40	-35	dB	29, 32, 35	7, 9, 11	OP to GD
Crosstalk between channel 1 (10 MHz)	CTC1	—	-50	-40	dB	29, 32, 35	1, 3, 5	GND
Crosstalk between channel 2 (10 MHz)	CTC2	—	-50	-40	dB	29, 32, 35	7, 9, 11	OPN
Crosstalk between channel 3 (100 MHz)	CTC3	—	-30	-25	dB	29, 32, 35	1, 3, 5	GND
Crosstalk between channel 4 (100 MHz)	CTC4	—	-30	-25	dB	29, 32, 35	7, 9, 11	OPN
Pulse characteristic 1	Tr1	—	1.6	2.5	ns	29, 32, 35	1, 3, 5	GND
	Tf1	—	1.6	2.5	ns	29, 32, 35	1, 3, 5	GND
Pulse characteristic 2	Tr2	—	1.6	2.5	ns	29, 32, 35	7, 9, 11	OPN
	Tf2	—	1.6	2.5	ns	29, 32, 35	7, 9, 11	OPN
<SYNC SEP>								
Sync input min. level	SYrv	0.2	—	—	V <sub>P-P</sub>	25	26	—
Sync-sep output Hi level	SYVH	4.5	4.9	—	V	25	26	—
Sync-sep output Low level	SYVL	—	0.2	0.4	V	25	26	—
Sync-sep output delay time 1	TdSf	—	60	—	ns	25	26	—
Sync-sep output delay time 2	TdSb	—	60	—	ns	25	26	—





## Electrical Characteristics (cont.)

Item	Symbol	Limits			Unit	Test Point (s)	Input	SW18
		Min	Typ	Max				
<SYNC DET>								
Min. detectable Sync amplitude	SDETrv	0.2	—	—	V <sub>P-P</sub>	14	3, 9	—
Max. detectable Sync width	SDETrt	—	4.0	—	μS	14	3, 9	—
Sync-DET output high level	SDVH	4.5	4.9	—	V	14	3, 9	—
Sync-DET output low level	SDVL	—	0.2	0.4	V	14	3, 9	—
Max. allowable input noise level	SDETrv	—	—	0.05	V <sub>P-P</sub>	14	3, 9	—
<VIDEO DET>								
Allowable input DC range	VDinV	2.0	2.4	2.8	V	19, 21, 23	19, 21, 23	—
Allowable input amplitude range	VDin	—	0.7	1.0	V <sub>P-P</sub>	19, 21, 23	19, 21, 23	—
Min. detectable input level	VDETrv	0.15	—	—	V <sub>P-P</sub>	17	19, 21, 23	—
Max. allowable input noise level	VDETrv	—	—	0.1	V <sub>P-P</sub>	17	19, 21, 23	—
Max. input pulse width	VDETrt	—	10.0	—	ns	17	19, 21, 23	—
Video-DET output Hi level	SDVH	4.2	4.8	—	V	17	19, 21, 23	—
Video-DET output Low level	SDVL	—	0.7	1.0	V	17	19, 21, 23	—

Not recommended  
for new design

Package Dimensions

JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
P-SSOP36-8.4x15-0.80	PRSP0036GA-B	36P2R-D	0.5g

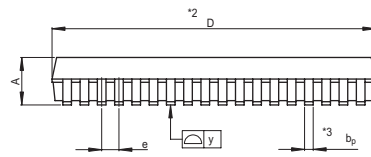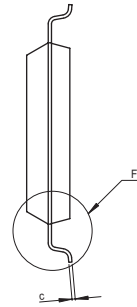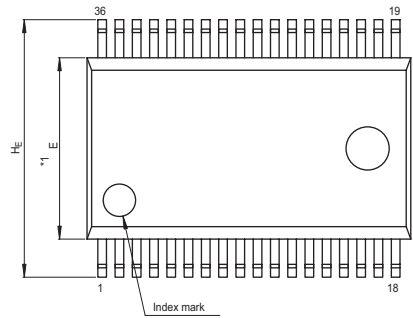

NOTE)  
 1. DIMENSIONS \*\*1\* AND \*\*2\* DO NOT INCLUDE MOLD FLASH.  
 2. DIMENSION \*\*3\* DOES NOT INCLUDE TRIM OFFSET.

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	14.8	15.0	15.2
E	8.2	8.4	8.6
A <sub>2</sub>	—	2.05	—
A	—	—	2.35
A <sub>1</sub>	0	0.1	0.2
b <sub>p</sub>	0.3	0.35	0.45
c	0.18	0.2	0.25
θ	0°	—	8°
H <sub>E</sub>	11.63	11.93	12.23
e	0.65	0.8	0.95
y	—	—	0.10
L	0.3	0.5	0.7

Not recommended for new design

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
  - (1) artificial life support devices or systems
  - (2) surgical implantations
  - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
  - (4) any other purposes that pose a direct threat to human lifeRenesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



**RENESAS SALES OFFICES**

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

**Renesas Technology America, Inc.**  
450 Holger Way, San Jose, CA 95134-1368, U.S.A  
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

**Renesas Technology Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

**Renesas Technology (Shanghai) Co., Ltd.**  
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120  
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7858/7898

**Renesas Technology Hong Kong Ltd.**  
7th Floor, North Tower, World Finance Centre, Harbour City, Canton Road, Tsimshatsui, Kowloon, Hong Kong  
Tel: <852> 2265-6688, Fax: <852> 2377-3473

**Renesas Technology Taiwan Co., Ltd.**  
10th Floor, No.99, Fushing North Road, Taipei, Taiwan  
Tel: <886> (2) 2715-2888, Fax: <886> (2) 3518-3399

**Renesas Technology Singapore Pte. Ltd.**  
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: <65> 6213-0200, Fax: <65> 6278-8001

**Renesas Technology Korea Co., Ltd.**  
Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea  
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

**Renesas Technology Malaysia Sdn. Bhd**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: <603> 7955-9390, Fax: <603> 7955-9510