

M52759SP

Uniformity for CRT Display Monitor

REJ03F0197-0201

Rev.2.01

Mar 31, 2008

Description

M52759SP is semiconductor integrated circuit for uniformity of CRT display monitor.

It generates horizontal and vertical parabola waves and is able to revise contrast of CRT display monitor if it is used with Video Pre.Amp. M52742SP that has uniformity circuit.

Features

- It can control phase of horizontal wave.
- It can changes the parabola wave unbalance.
- It contains the horizontal saw wave generator and Auto Gain Control circuit, so that it is able to keep the amplitude constant if frequency change.
- It can changes the parabola wave unbalance.
- Frequency Band Width: horizontal 24 to 120 kHz
 Vertical 50 to 185 Hz
- Input: horizontal 5 V_{P-P} Pulse
 Vertical 3.2 V_{P-P} V Saw

Application

CRT display monitor


Recommended Operating Condition

Supply voltage range: 11.5 V to 12.5 V


Rated supply voltage: 12 V

Not recommended for new design

Block Diagram

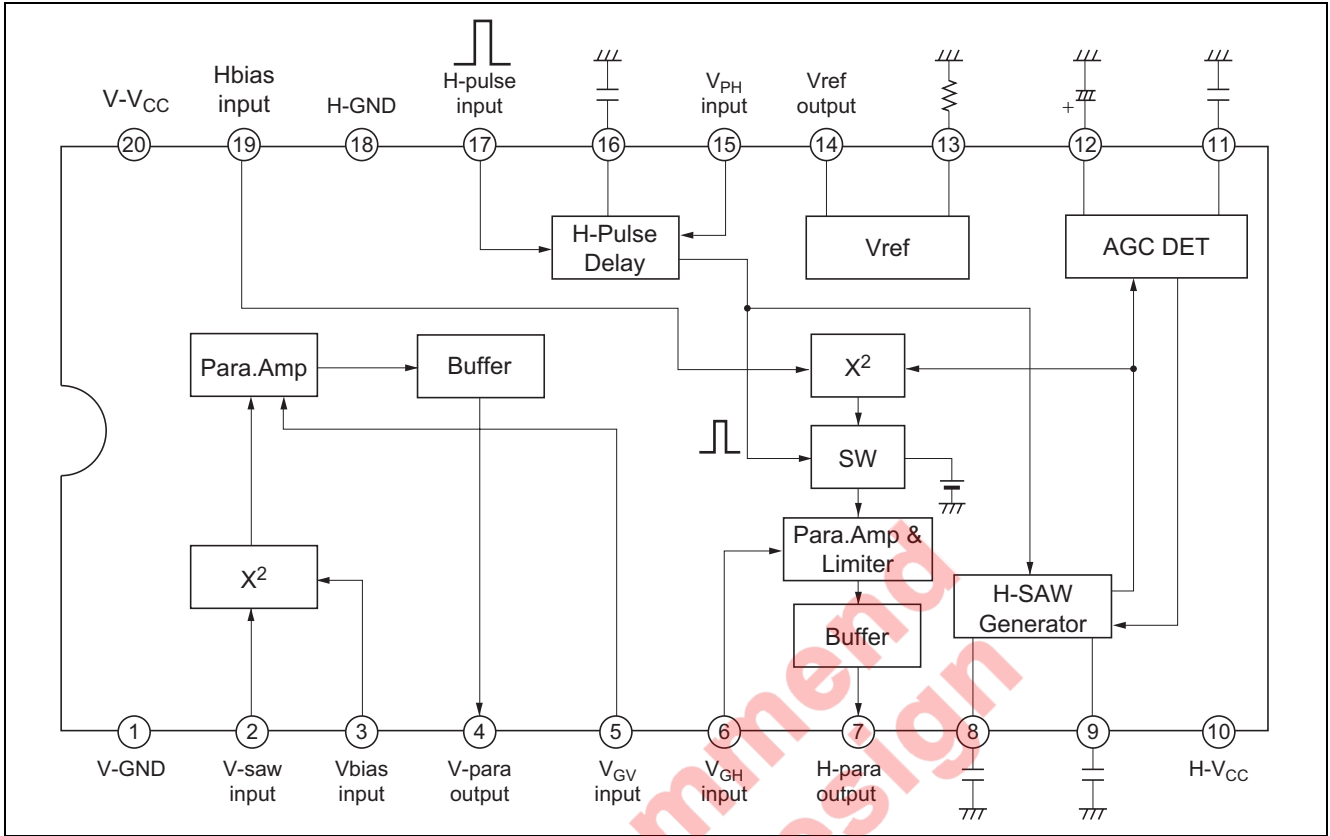


Pin Arrangement

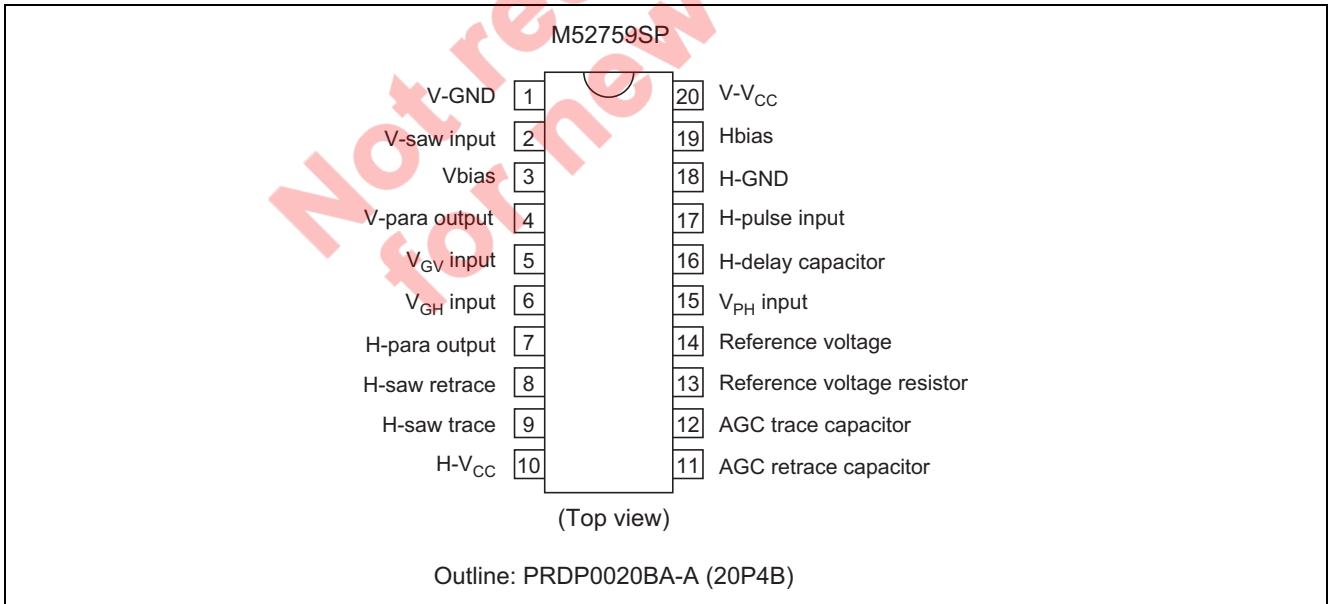

Absolute Maximum Ratings

(Ta = 25°C, Surge capacity = 200 pF)

Item	Symbol	Ratings			Unit
		Min.	Typ.	Max.	
Supply voltage	V _{CC}	—	—	13.0	V
Power dissipation	P _d	—	—	1237.6	mW
Operating temperature	T _{opr}	-20	—	+85	°C
Storage temperature	T _{stg}	-40	—	+150	°C
Recommended operating voltage	V _{opr}	—	12.0	—	V
Recommended operating voltage range	V _{opr'}	11.5	—	12.5	V
Surge	V _{surge}	±200	—	—	V

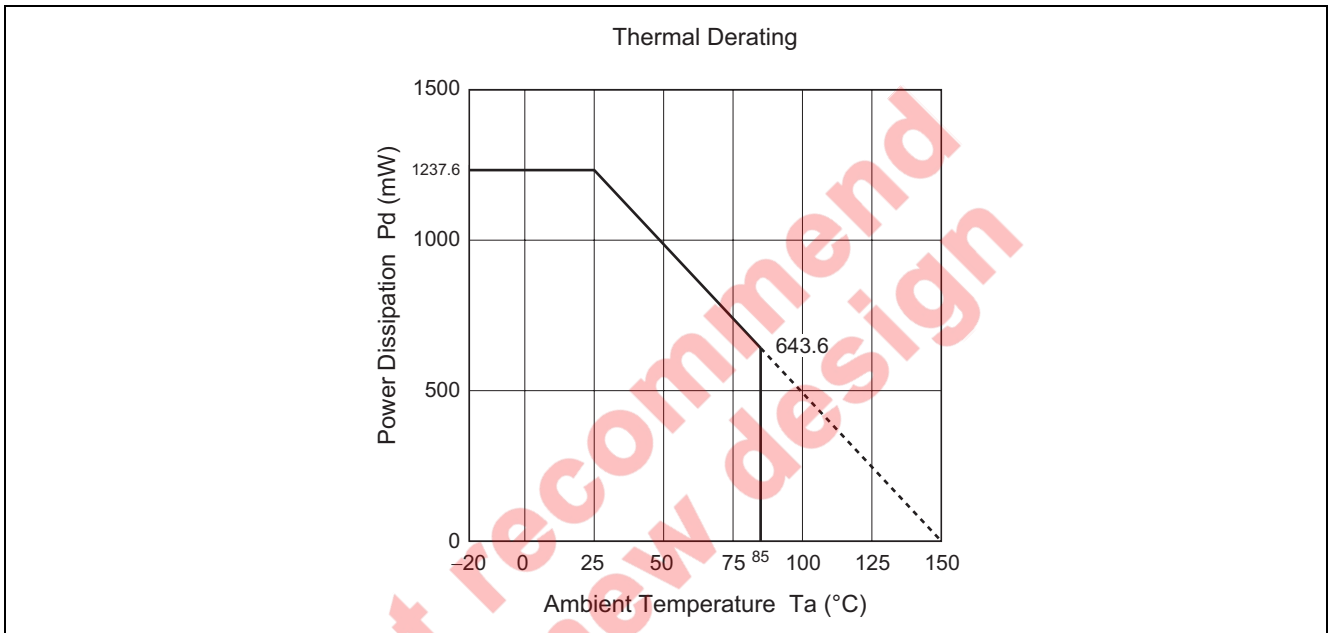

Electrical Characteristics

(Ta = 25°C, V_{CC} = 12 V, unless otherwise noted)

Item	Symbol	Limits			Unit	Test Conditions	Pin No.
		Min.	Typ.	Max.			
Circuit current 1	I _{CCH}	15.1	21.5	27.9	mA	(10) Measure	10
Circuit current 2	I _{CCV}	5.2	7.4	9.6	mA	(20) Measure	20
Reference voltage output	V _{REF}	6.75	6.95	7.15	V	(14) Measure	14
Reference voltage temperature drift	D _{REF}	—	49	—	ppm/deg	(14) Measure	14
Horizontal Block							
H-pulse low input range	V _{IL}	0.0	—	2.0	V	(6) 2.4 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H-pulse high input range	V _{IH}	3.0	—	V _{CC} -2.0	V	(6) 2.4 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H-pulse low input current	I _{IL}	-5.0	-0.6	-0.1	μA	(17) 0 V in, measure	17
H-pulse high input current	I _{IH}	-1.0	0.0	1.0	μA	(17) 5 V in, measure	17
H parabola width	T _W	0.6	0.8	1.0	μs	(6) 2.4 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H parabola delay 1	T _{D1}	0.1	0.3	0.5	μs	(6) 2.4 V in (7) Measure (15) 0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H parabola delay 2	T _{D2}	0.4	0.6	0.8	μs	(6) 2.4 V in (7) Measure (15) 1.3 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H parabola delay 3	T _{D3}	2.9	3.1	3.3	μs	(6) 2.4 V in (7) Measure (15) 4.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
Delay temperature drift	D _D	—	0.08	—	ns/deg	(6) 2.4 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
Pin 15 input current	I ₁₅	-5.0	-0.3	-0.1	μA	(17) 2.5 V in, measure	15

Electrical Characteristics (cont.)

Item	Symbol	Limits			Unit	Test Conditions	Pin No.
		Min.	Typ.	Max.			
H para. unbalance control 1	U _{HP1}	-2.6	-2.2	-1.8	V	(6) 1.8 V in (7) Measure (15) 0 V in (17) fH = 96 kHz H-pulse in (19) 5.7 V in	7
H para. unbalance control 2	U _{HP2}	0.1	0.5	0.9	V	(6) 2.4 V in (7) Measure (15) 0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. unbalance control 3	U _{HP3}	1.7	2.1	2.5	V	(6) 1.8 V in (7) Measure (15) 0 V in (17) fH = 96 kHz H-pulse in (19) 6.4 V in	7
H para. unbalance V _{CC} . character 1	V _{UHP1}	-0.2	0.0	0.2	V	(6) 2.4 V in (7) Measure (15) 0 V in (10) (20) 11.5 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. unbalance V _{CC} . character 2	V _{UHP2}	-0.2	0.0	0.2	V	(6) 2.4 V in (7) Measure (15) 0 V in (10) (20) 12.5 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. unbalance temperature drift	D _{UHP}	—	-2.2	—	mV/ deg	(6) 2.4 V in (7) Measure (15) 0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. gain control 1	G _{HP1}	0.2	0.4	0.6	V _{P-P}	(6) 1.0 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. gain control 2	G _{HP2}	2.9	3.3	3.7	V _{P-P}	(6) 2.5 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. gain control 3	G _{HP3}	5.3	6.0	6.7	V _{P-P}	(6) 4.0 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7

Electrical Characteristics (cont.)

Item	Symbol	Limits			Unit	Test Conditions	Pin No.
		Min.	Typ.	Max.			
H para. freq. characteristics 1	F _{HP1}	-0.2	0.0	0.2	V	(6) 4.0 V in (7) Measure (15) 3.0 V in (17) fH = 24 kHz H-pulse in (19) 6.1 V in	7
H para. freq. characteristics 2	F _{HP2}	-0.2	0.0	0.2	V	(6) 4.0 V in (7) Measure (15) 3.0 V in (17) fH = 120 kHz H-pulse in (19) 6.1 V in	7
H para. V _{CC} characteristics 1	V _{VHP1}	-0.2	0.0	0.2	V	(6) 4.0 V in (7) Measure (15) 3.0 V in (10) (20) 11.5 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. V _{CC} characteristics 2	V _{VHP2}	-0.2	0.0	0.2	V	(6) 4.0 V in (7) Measure (15) 3.0 V in (10) (20) 12.5 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
H para. size temperature drift	D _{HP}	—	-1.3	—	mV/ deg	(6) 4.0 V in (7) Measure (15) 3.0 V in (17) fH = 96 kHz H-pulse in (19) 6.1 V in	7
Pin 6 input current	I ₆	-5.0	-0.3	-0.1	μA	(6) 2.4 V in, measure	6
Pin 19 input current	I ₁₉	0.1	0.3	5.0	μA	(19) 6.1 V in, measure	19
Vertical Block							
V parabola accuracy 1	A _{VP1}	4.5	5.0	5.5	V	(2) 3.5 V in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V parabola accuracy 2	A _{VP2}	2.5	3.0	3.5	V	(2) 1.9 V in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V parabola accuracy 3	A _{VP3}	20	25	30	%	(2) 2.7 V in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V parabola accuracy 4	A _{VP4}	20	25	30	%	(2) 4.3 V in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V parabola accuracy 5	A _{VP5}	90	100	110	%	(2) 5.1 V in (3) 3.5V in (4) Measure (5) 2.3 V in	4

Electrical Characteristics (cont.)

Item	Symbol	Limits			Unit	Test Conditions	Pin No.
		Min.	Typ.	Max.			
V para. unbalance control 1	U_{VP1}	-2.8	-2.5	-2.2	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 2.8 V in (4) Measure (5) 1.6 V in	4
V para. unbalance control 2	U_{VP2}	-0.3	0	0.3	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V para. unbalance control 3	U_{VP3}	2.2	2.5	2.8	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 4.2 V in (4) Measure (5) 1.6 V in	4
V unbalance. V_{CC} . characteristics 1	V_{UVP1}	-0.1	0.0	0.1	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 2.3 V in (10) (20) 11.5 V in	4
V unbalance. V_{CC} . characteristics 2	V_{UVP2}	-0.1	0.0	0.1	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 2.3 V in (10) (20) 12.5 V in	4
V unbalance. temperature drift	D_{UVP}	—	0.5	—	mV/deg	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 2.3 V in	4
V parabola amplitude 1	G_{VP1}	0	0	0.3	V_{P-P}	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 1.0 V in	4
V parabola amplitude 2	G_{VP2}	2.1	2.4	2.7	V_{P-P}	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 2.0 V in	4
V parabola amplitude 3	G_{VP3}	4.2	4.7	5.2	V_{P-P}	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in	4
V para. freq. characteristics 1	F_{VP1}	-0.1	0.0	0.1	V	(2) $f_V = 50$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in	4
V para. freq. characteristics 2	F_{VP2}	-0.1	0.0	0.1	V	(2) $f_V = 185$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in	4

Electrical Characteristics (cont.)


Item	Symbol	Limits			Unit	Test Conditions	Pin No.
		Min.	Typ.	Max.			
V para. V_{CC} -characteristics 1	V_{VP1}	-0.1	0.0	0.1	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in (10) (20) 11.5 V in	4
V para. V_{CC} -characteristics 2	V_{VP2}	-0.1	0.0	0.1	V	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in (10) (20) 12.5 V in	4
V para. temperature drift	D_{VP}	—	-2.2	—	mV/ deg	(2) $f_V = 70$ Hz, 3.2 V_{P-P} saw wave in (3) 3.5 V in (4) Measure (5) 3.0 V in	4
Pin 2 input current	I_2	-5.0	-0.3	-0.1	μ A	(2) 3.5 V in, measure	2
Pin 3 input current	I_3	-5.0	-0.3	-0.1	μ A	(3) 3.5 V in, measure	3
Pin 5 input current	I_5	-5.0	-0.3	-0.1	μ A	(5) 2.3 V in, measure	5

Not recommended
for new design

Switch and Voltage Condition

Symbol	Switch									Voltage (V)							
	SW2	SW3	SW5	SW6	SW10	SW15	SW17	SW19	SW20	V _{CC}	V2	V3	V5	V6	V15	V17	V19
I _{CCH}	a	a	a	a	b	a	b	a	a	12.0	3.5	3.5	2.5	2.4	3.0	0	6.1
I _{CCV}	↓	↓	↓	↓	a	↓	↓	↓	b	↓	↓	↓	↓	↓	↓	↓	↓
V _{REF}	↓	↓	↓	↓	↓	↓	↓	↓	a	↓	↓	↓	↓	↓	↓	↓	↓
D _{REF}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
V _{IL}	↓	↓	↓	↓	↓	↓	a	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
V _{IH}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
I _{IL}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	0	↓
I _{IH}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	5.0	↓
T _W	↓	↓	↓	↓	↓	↓	a	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
T _{D1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	0	↓	↓
T _{D2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	1.3	↓	↓
T _{D3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	4.0	↓	↓
D _D	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3.0	↓	↓
I ₁₅	↓	↓	↓	↓	↓	b	b	↓	↓	↓	↓	↓	↓	↓	↓	0	↓
U _{HP1}	↓	↓	↓	↓	↓	a	a	↓	↓	↓	↓	↓	↓	1.8	0	↓	5.7
U _{HP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	2.4	↓	↓	6.1
U _{HP3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	1.8	↓	↓	6.4
V _{UHP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	11.5	↓	↓	↓	2.4	↓	↓	6.1
V _{UHP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.5	↓	↓	↓	↓	↓	↓	↓
D _{UHP}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.0	↓	↓	↓	↓	↓	↓	↓
G _{HP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	1.0	3.0	↓	↓
G _{HP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	2.5	↓	↓	↓
G _{HP3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	4.0	↓	↓	↓
F _{HP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
F _{HP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
V _{VHP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	11.5	↓	↓	↓	↓	↓	↓	↓
V _{VHP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.5	↓	↓	↓	↓	↓	↓	↓
D _{HP}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.0	↓	↓	↓	↓	↓	↓	↓
I ₆	↓	↓	↓	b	↓	↓	b	↓	↓	↓	↓	↓	↓	↓	0	↓	↓
I ₁₉	↓	↓	↓	a	↓	↓	↓	b	↓	↓	↓	↓	↓	2.4	↓	↓	↓
A _{VP1}	↓	↓	↓	↓	↓	↓	↓	a	↓	↓	↓	↓	↓	↓	↓	↓	6.1
A _{VP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	1.9	↓	↓	↓	↓	↓	↓
A _{VP3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	2.7	↓	↓	↓	↓	↓	↓
A _{VP4}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	4.3	↓	↓	↓	↓	↓	↓
A _{VP5}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	5.1	↓	↓	↓	↓	↓	↓
U _{VP1}	b	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	2.8	1.6	↓	↓	↓	↓
U _{VP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3.5	2.3	↓	↓	↓	↓
U _{VP3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	4.2	1.6	↓	↓	↓	↓
V _{UVP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	11.5	↓	3.5	2.3	↓	↓	↓	↓
V _{UVP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.5	↓	↓	↓	↓	↓	↓	↓
D _{UVP}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.0	↓	↓	↓	↓	↓	↓	↓
G _{VP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	1.0	↓	↓	↓
G _{VP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	2.0	↓	↓	↓
G _{VP3}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3.0	↓	↓	↓
F _{VP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
F _{VP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
V _{VP1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	11.5	↓	↓	↓	↓	↓	↓	↓
V _{VP2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	12.5	↓	↓	↓	↓	↓	↓	↓
D _{VP}	c	↓	↓	↓	↓	↓	↓	↓	↓	12.0	↓	↓	↓	↓	↓	↓	↓
I ₂	a	b	↓	↓	↓	↓	↓	↓	↓	↓	3.5	↓	2.3	↓	↓	↓	↓
I ₃	a	a	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
I ₅	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓

Input Signal

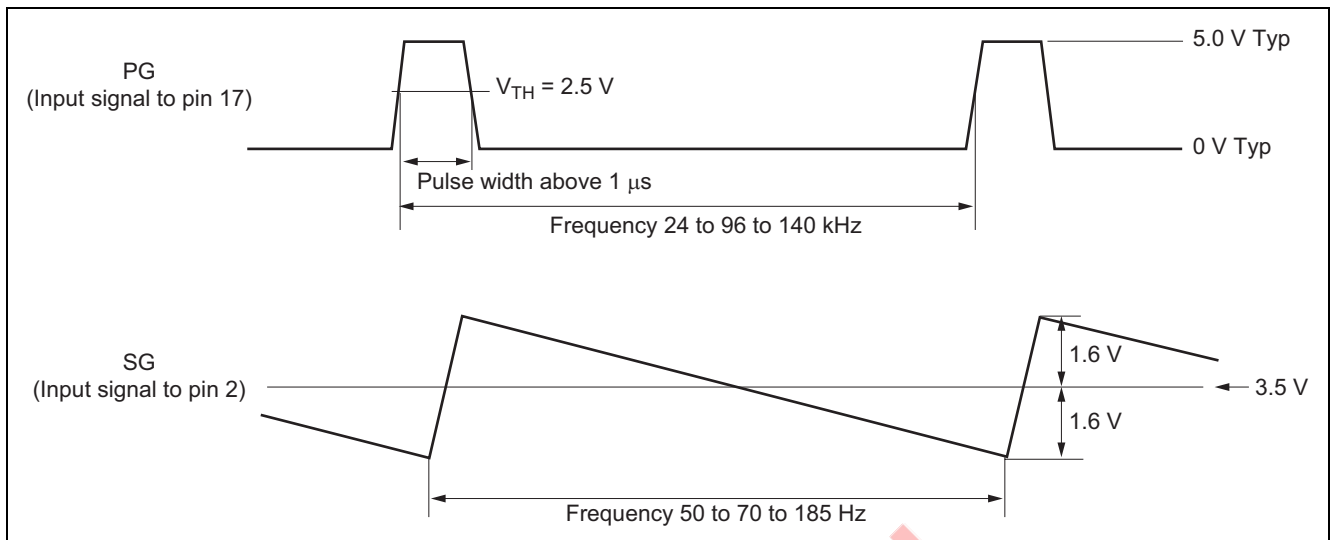

Electrical Characteristics Test Method

I_{CCH} Circuit Current1

Measure the input current to pin 10.

I_{CCV} Circuit Current2

Measure the input current to pin 20.

V_{REF} Reference Voltage Output


Measure the output voltage at pin 14.

D_{REF} Reference Voltage Temperature Drift

Measure temperature drift of pin 14. (-20°C to 85°C)


V_{IL} H-pulse Low Input Range

Input horizontal pulse which low level is 2 V in pin 17 and confirm output horizontal signal at pin 7.

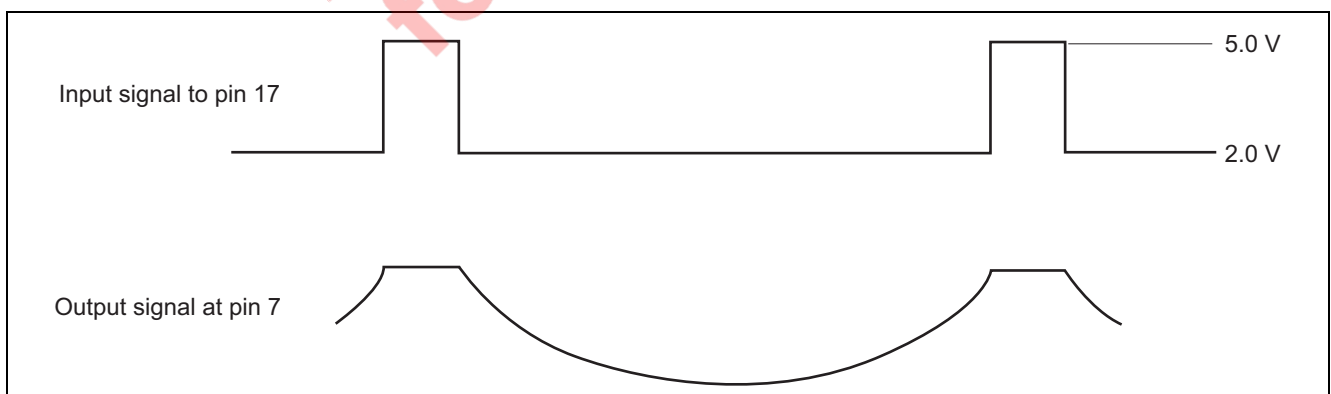


V_{IH} H-pulse High Input Range

Input horizontal pulse which high level is 3 V in pin 17 and confirm output horizontal signal at pin 7.

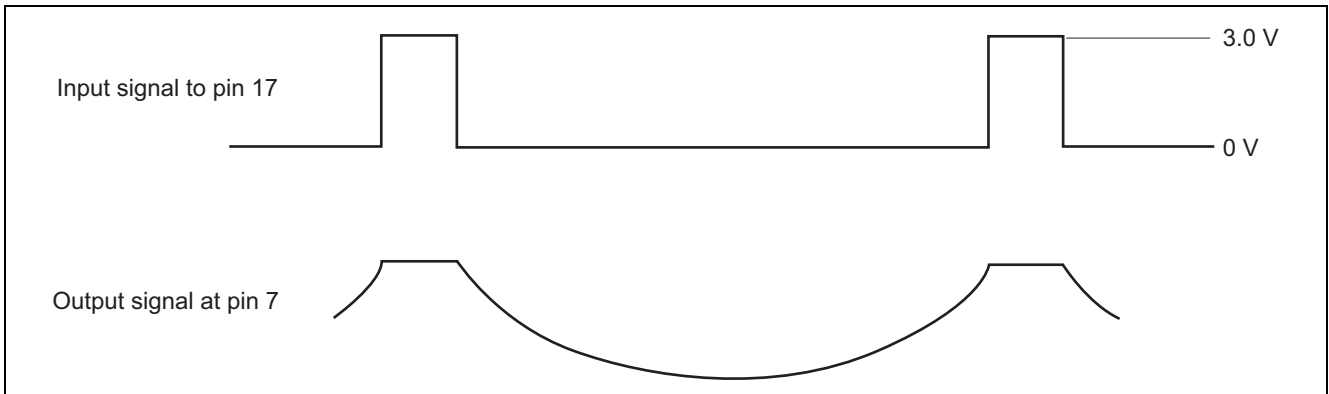


T_W H Parabola Width

Measure the time width of retrace period at pin 7.

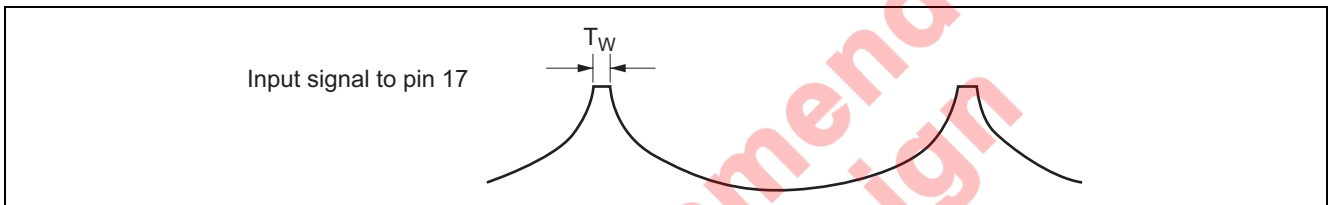

T_{D1}, T_{D2}, T_{D3} H Parabola Delay

Measure the delay time from rise time of input signal to start of retrace period of output signal when the voltage of pin 15 is 0 V, 1.3 V, and 4 V.

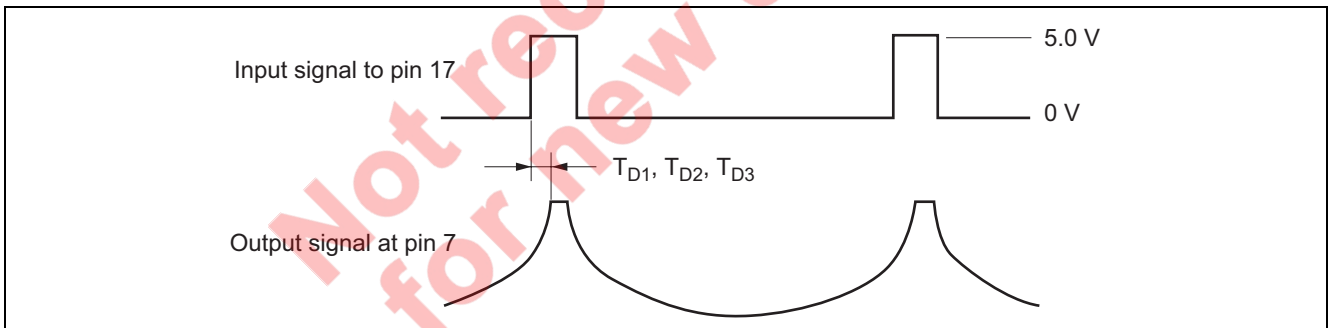

D_D Delay Temperature Drift

Measure the temperature drift of the delay time. (-20°C to 85°C)

I₁₅ Pin 15 Input Current


Measure the input current to pin 15 when the voltage of pin 15 is 2.5 V.

U_{HP1}, U_{HP2}, U_{HP3} H para. Unbalance Control

U_{HPS} is defined as the voltage of parabola start point. U_{HPE} is defined as the voltage of parabola end point. U_{HP1}, U_{HP2}, U_{HP3} is defined as follows

$$U_{HP1}, U_{HP2}, U_{HP3} = U_{HPS} - U_{HPE}$$

Measure the unbalance of parabola waveform at pin 4 when the voltage of pin 19 is 5.7 V, 6.1 V, and 6.4 V. Pin 6 is controlled so that the amplitude of parabola is 3 V_{p,p} constant.

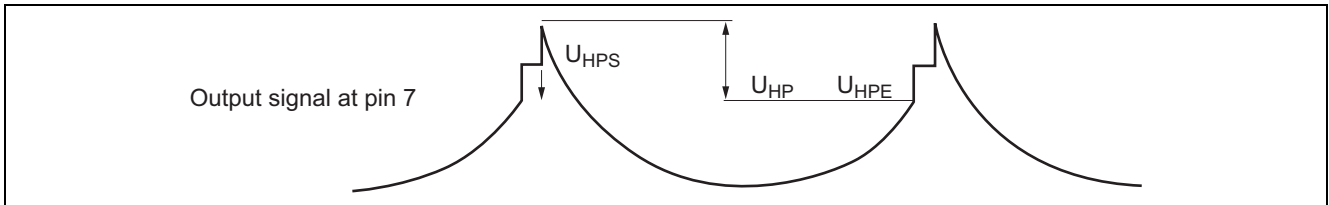**V_{UHP1} H para. Unbalance V_{CC}. Characteristics1**

When the supply voltage of pin 10, 20 is 11.5 V, the unbalance of parabola waveform at pin 7 is defined as U_{HP11.5 V}.

$$V_{UHP1} = U_{HP2} - U_{HP11.5 V}$$

V_{UHP2} H para. Unbalance V_{CC}. Characteristics2

When the supply voltage of pin 10, 20 is 12.5 V, the unbalance of parabola waveform at pin 7 is defined as U_{HP12.5 V}.

$$V_{UHP2} = U_{HP2} - U_{HP12.5 V}$$

D_{UHP} H para. Unbalance Temperature Drift

Measure temperature drift of U_{HP2}. (-20°C to 85°C)

G_{HP1} H Para. Gain Control1

Measure the amplitude of parabola waveform at pin 7 and it is defined as HP_{-6, 1.0 V}.

G_{HP2} H Para. Gain Control2

The amplitude of parabola waveform at pin 7 is defined as HP_{-6, 2.5 V}.

G_{HP3} H Para. Gain Control3

The amplitude of parabola waveform at pin 7 is defined as HP_{-6, 4.0 V}.

F_{HP1} H Para. Freq. Characteristics1

When the frequency of input signal in pin 17 is 96 kHz, the amplitude of parabola waveform at pin 7 is defined as HP_{96 kHz}. When the frequency of input signal is 24 kHz, the amplitude of parabola waveform is defined as HP_{24 kHz}.

$$F_{HP1} = HP_{96 kHz} - HP_{24 kHz}$$

F_{HP2} H Para. Freq. Characteristics2

When the frequency of input signal in pin 17 is 140 kHz, the amplitude of parabola waveform at pin 7 is defined as HP_{120 kHz}.

$$F_{HP2} = HP_{96 kHz} - HP_{140 kHz}$$

V_{VHP1} H Para. V_{CC}. Characteristics1

When the supply voltage of pin 10, 20 is 12.0 V, the amplitude of parabola waveform at pin 7 is defined as HP_{12.0 V}.
When the supply voltage is 11.5 V, the amplitude of parabola waveform is defined as HP_{11.5 V}.

$$V_{VHP1} = HP_{12.0 V} - HP_{11.5 V}$$

V_{VHP2} H Para. V_{CC}. Characteristics2

When the supply voltage of pin 10, 20 is 12.5 V, the amplitude of parabola waveform at pin 7 is defined as HP_{12.5 V}.

$$V_{VHP2} = HP_{12.0 V} - HP_{12.5 V}$$

D_{HP} H Para. Size Temperature Drift

Measure the temperature drift of HP_{96 kHz}. (−20°C to 85°C)

I₆ Pin 6 Input Current

Measure the input current to pin 6 when voltage of pin 6 is 2.4 V.

I₁₉ Pin 19 Input Current

Measure the input current to pin 19 when voltage of pin 19 is 6.1 V.

A_{VP1} V Parabola Accuracy1

Measure the output voltage at pin 4 and it is defined as VP_{-2, 3.5 v}.

A_{VP2} V Parabola Accuracy2

The output voltage at pin 4 is defined as VP_{-2, 1.9 v}.

$$A_{VP2} = VP_{-2, 1.9 V} - VP_{-2, 3.5 V}$$

A_{VP3} V Parabola Accuracy3

The output voltage at pin 4 is defined as VP_{-2, 2.7 v}.

$$A_{VP3} = \frac{VP_{-2, 2.7 V} - VP_{-2, 3.5 V}}{VP_{-2, 1.9 V} - VP_{-2, 3.5 V}} \times 100 (\%)$$

A_{VP4} V Parabola Accuracy4

The output voltage at pin 4 is defined as VP_{-2, 4.3 v}.

$$A_{VP4} = \frac{VP_{-2, 4.3 V} - VP_{-2, 3.5 V}}{VP_{-2, 1.9 V} - VP_{-2, 3.5 V}} \times 100 (\%)$$

A_{VP5} V Parabola Accuracy5

The output voltage at pin 4 is defined as VP_{-2, 5.1 v}.


$$A_{VP5} = \frac{VP_{-2, 5.1 V} - VP_{-2, 3.5 V}}{VP_{-2, 1.9 V} - VP_{-2, 3.5 V}} \times 100 (\%)$$

U_{VP1} , U_{VP2} , U_{VP3} V Para. Unbalance Control

U_{VPS} is defined as the voltage of parabola start point. U_{VPE} is defined as the voltage of parabola end point. U_{VP1} , U_{VP2} , U_{VP3} is defined as follows

$$U_{VP1}, U_{VP2}, U_{VP3} = U_{VPS} - U_{VPE}$$

Measure the unbalance of parabola waveform at pin 4 when the voltage of pin 3 is 2.8 V, 3.5 V, and 4.2 V. Pin 5 is controlled so that the amplitude of parabola is 3 $V_{p,p}$ constant.

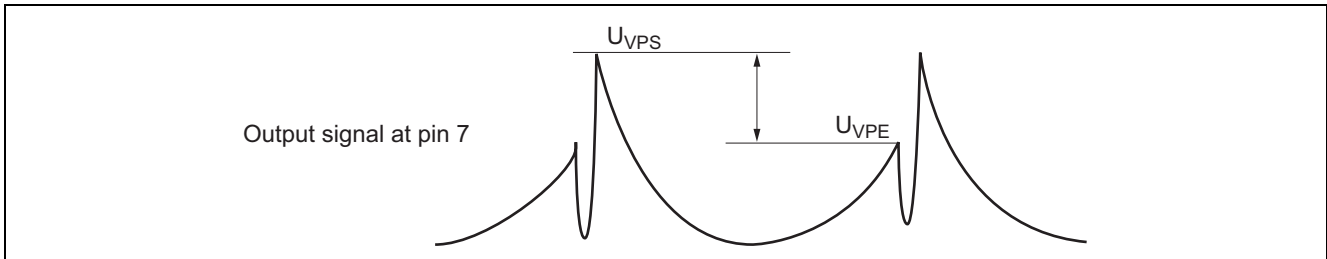 **V_{UVP1} V Unbalance V_{CC} . Characteristics1**

When the supply voltage of pin 10, 20 is 11.5 V, the unbalance of parabola waveform at pin 4 is defined as $U_{VP11.5V}$.

$$V_{UHP1} = U_{VP2} - U_{VP11.5V}$$

 V_{UVP2} V Unbalance V_{CC} . Characteristics2

When the supply voltage of pin 10, 20 is 12.5 V, the unbalance of parabola waveform at pin 4 is defined as $U_{VP12.5V}$.

$$V_{UVP2} = U_{VP2} - U_{VP12.5V}$$

 D_{UVP} V Unbalance Temperature Drift

Measure temperature drift of U_{VP2} (-20°C to 85°C)

 G_{VP1} , G_{VP2} , G_{VP3} V Parabola Amplitude

Measure the amplitude of parabola waveform at pin 4 when the voltage of pin 5 is 1 V, 2 V, and 3 V.

 F_{VP1} V Para. Freq. Characteristics1

When the frequency of input signal in pin 2 is 70 Hz, the amplitude of parabola waveform at pin 4 is defined as $VP_{70\text{ Hz}}$. When the frequency of input signal is 50 Hz, the amplitude of parabola waveform is defined as $VP_{50\text{ Hz}}$.

$$F_{VP1} = VP_{70\text{ Hz}} - VP_{50\text{ Hz}}$$

 F_{VP2} V Para. Freq. Characteristics2

When the frequency of input signal in pin 2 is 185 Hz, the amplitude of parabola waveform at pin 4 is defined as $VP_{185\text{ Hz}}$.

$$F_{VP2} = VP_{70\text{ Hz}} - VP_{185\text{ Hz}}$$

 V_{VP1} V Para. V_{CC} . Characteristics1

When the voltage of pin 10, 20 is 12.0 V, the amplitude of parabola waveform is defined as $VP_{12.0V}$. When the voltage is 11.5 V, the amplitude of parabola waveform is defined as $VP_{11.5V}$.

$$V_{VP1} = VP_{12.0V} - VP_{11.5V}$$

 V_{VP2} V Para. V_{CC} . Characteristics2

When the voltage of pin 10, 20 is 12.5 V, the amplitude of parabola waveform is defined as $VP_{12.5V}$.

$$V_{VP2} = VP_{12.0V} - VP_{12.5V}$$

D_{VP} V Para. Temperature Drift

Measure temperature drift of VP_{70 Hz}. (-20°C to 85°C)

I₂ Pin 2 Input Current

Measure the input current to pin 2 when the voltage of pin 2 is 3.5 V.

I₃ Pin 3 Input Current


Measure the input current to pin 3 when the voltage of pin 3 is 3.5 V.

I₅ Pin 5 Input Current

Measure the input current to pin 5 when the voltage of pin 5 is 2.4 V.


Not recommend
for new design

Test Circuit

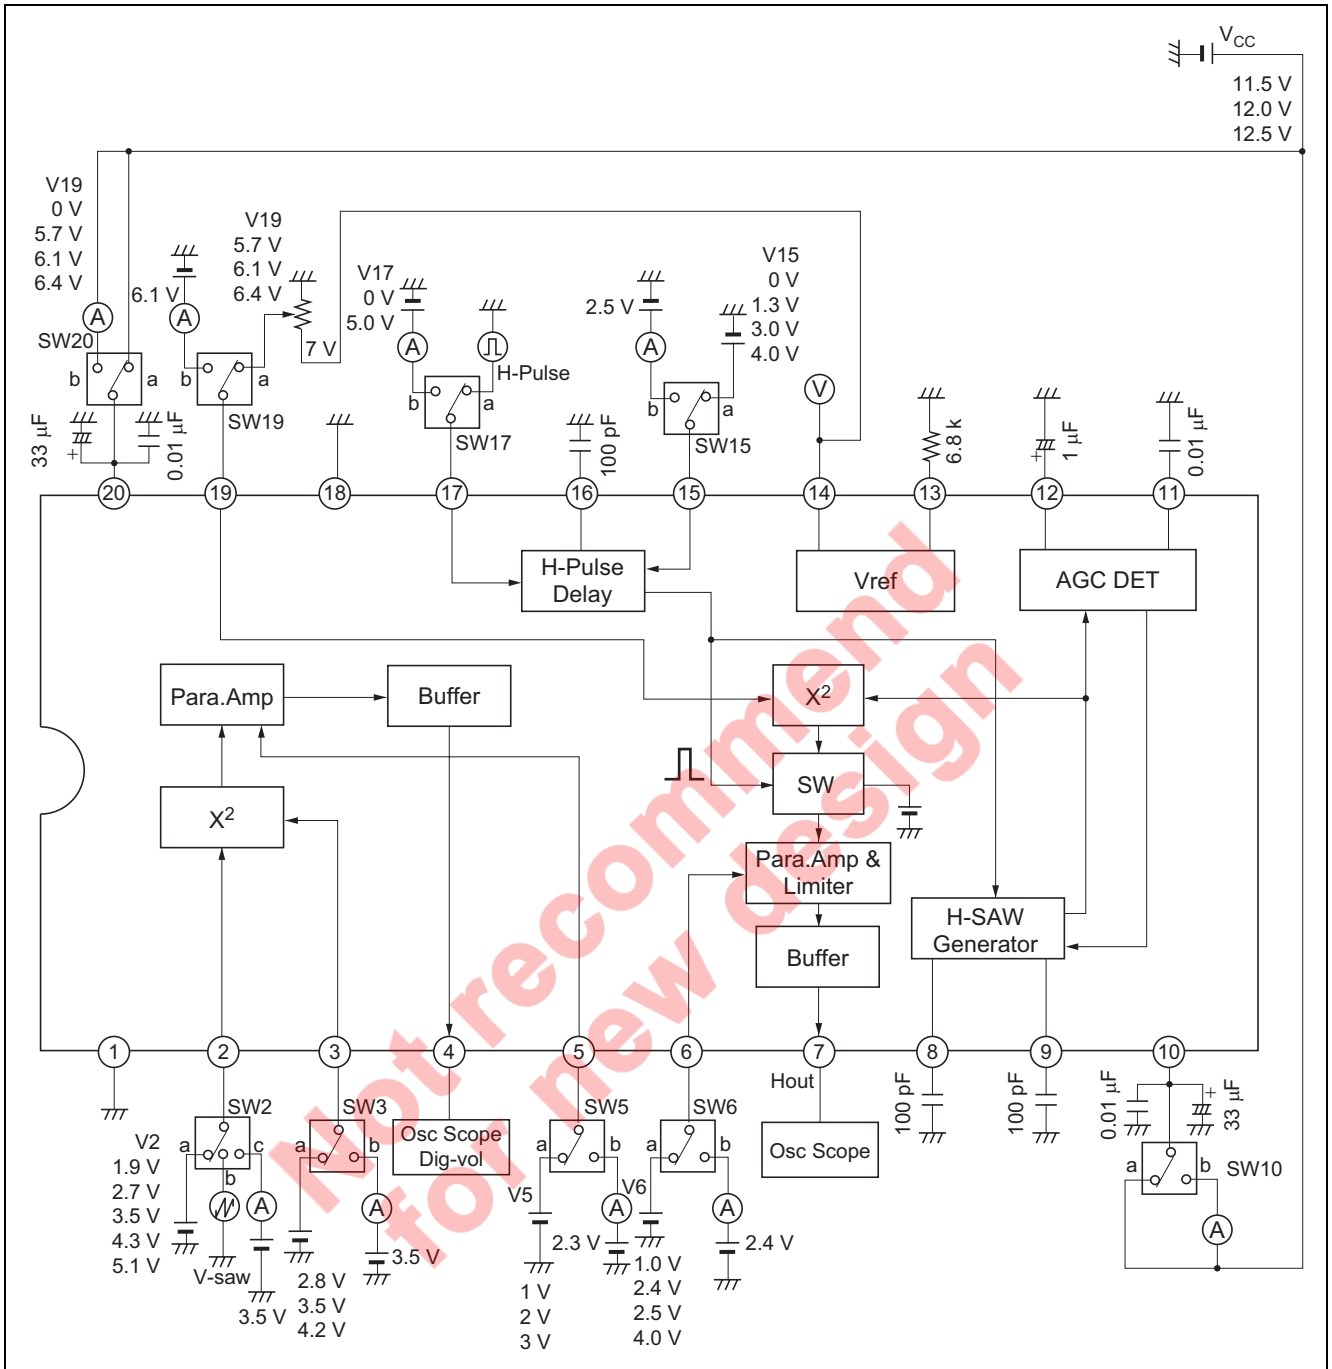


Typical Characteristics

Horizontal Block

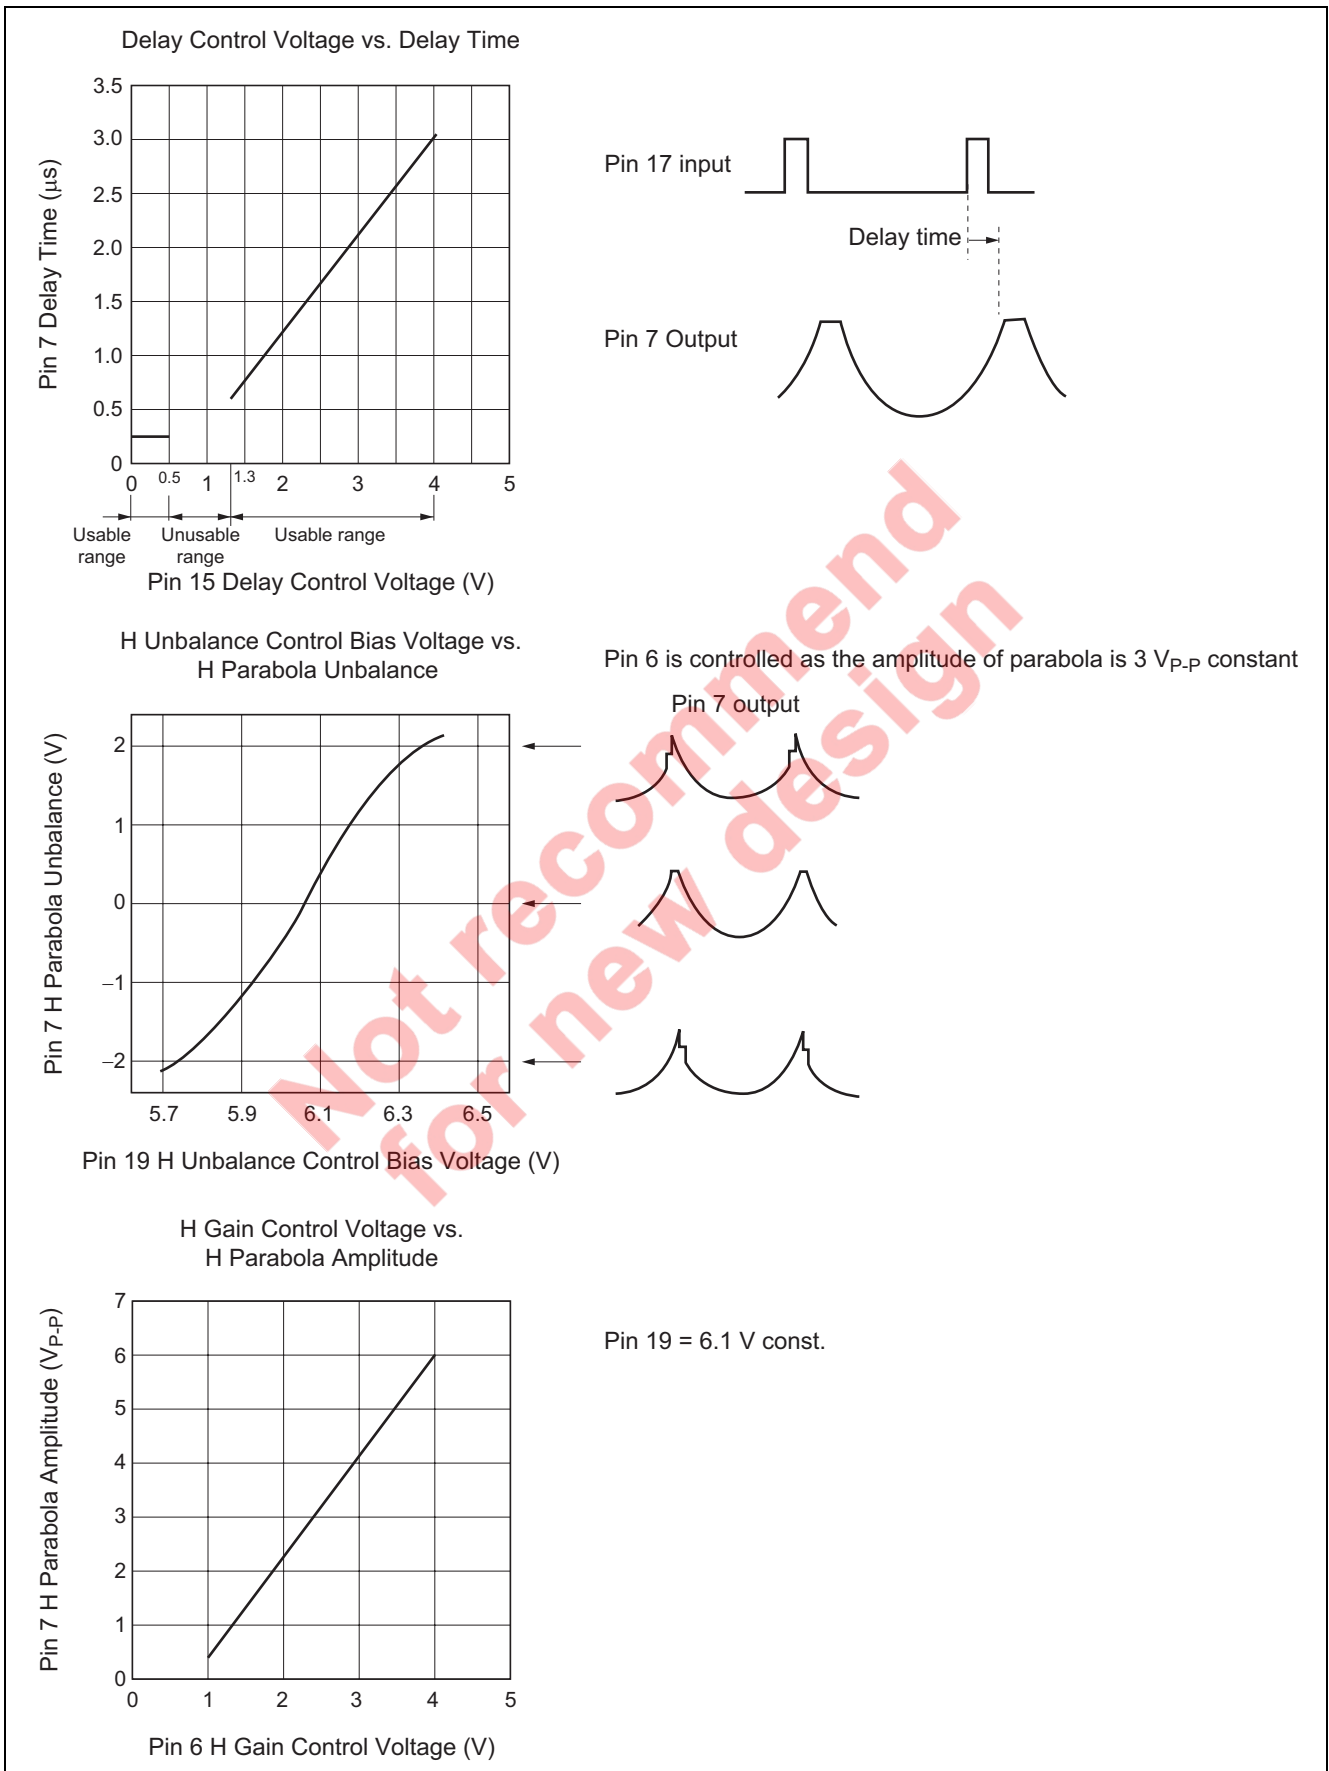


Vertical Block

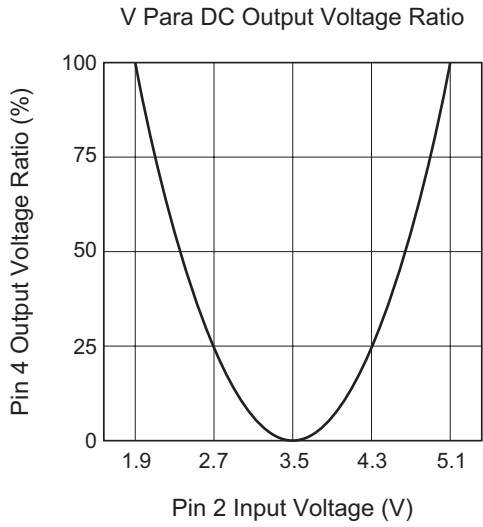

Pin 3 = 3.5 V const.
Pin 5 = 2.3 V const.

$$\text{Output ratio} = \frac{\text{Pin 4out} - \text{Pin 4out@Pin 4} = 3.5 \text{ V}}{\text{Pin 4out@Pin 2} = 1.9 \text{ V} - \text{Pin 4out@Pin 2} = 3.5 \text{ V}} \times 100 (\%)$$

V Unbalance Control Bias Voltage vs. V Parabola Unbalance

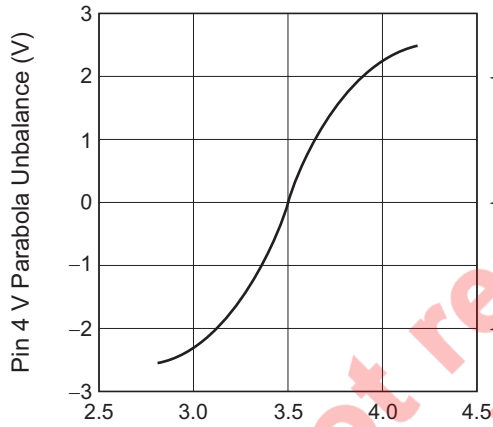


Pin 5 is controlled as the amplitude of parabola is 3 V_{P-P} constant



Pin 3 V Unbalance Control Bias Voltage (V)

V Para Amp Gain Control Voltage vs. Output Amplitude

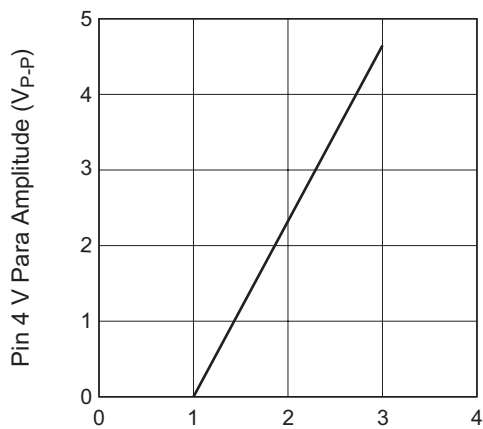


Pin 2 3.2 V_{P-P} sawtooth wave input


Pin 5 V Para Amp Gain Control Voltage (V)

Timing Chart


Horizontal Block

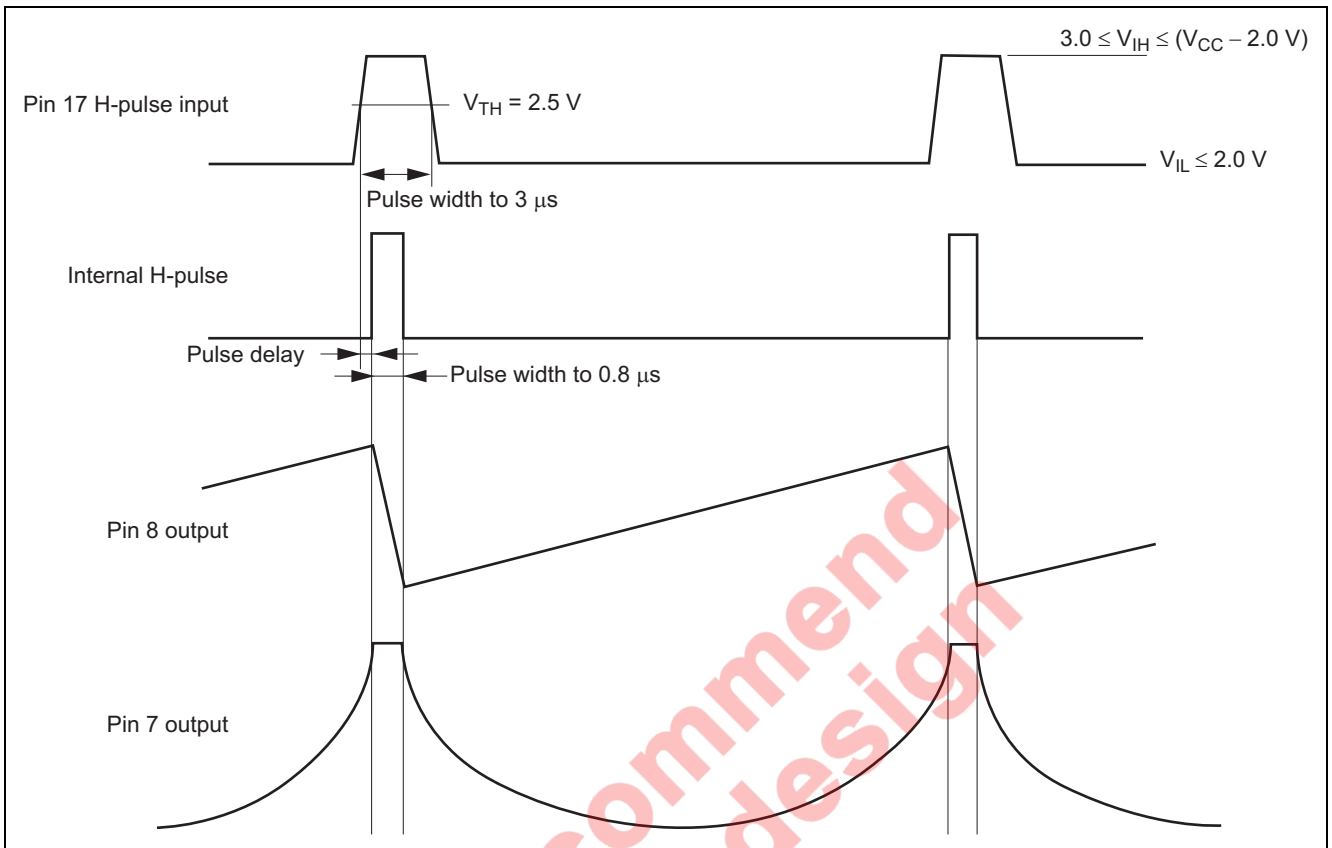


Vertical Block

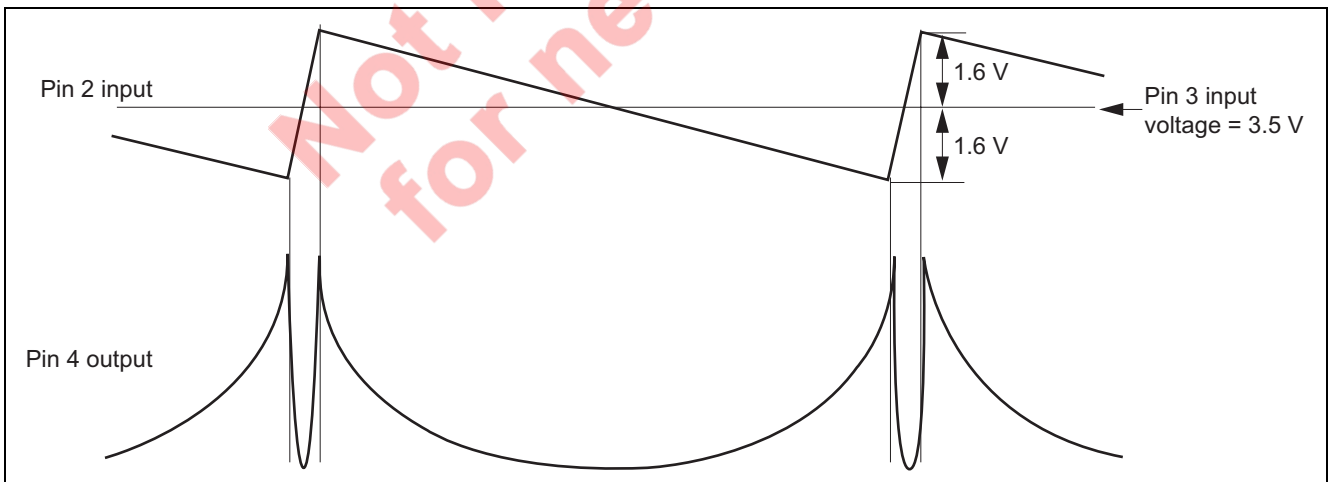

Application Example

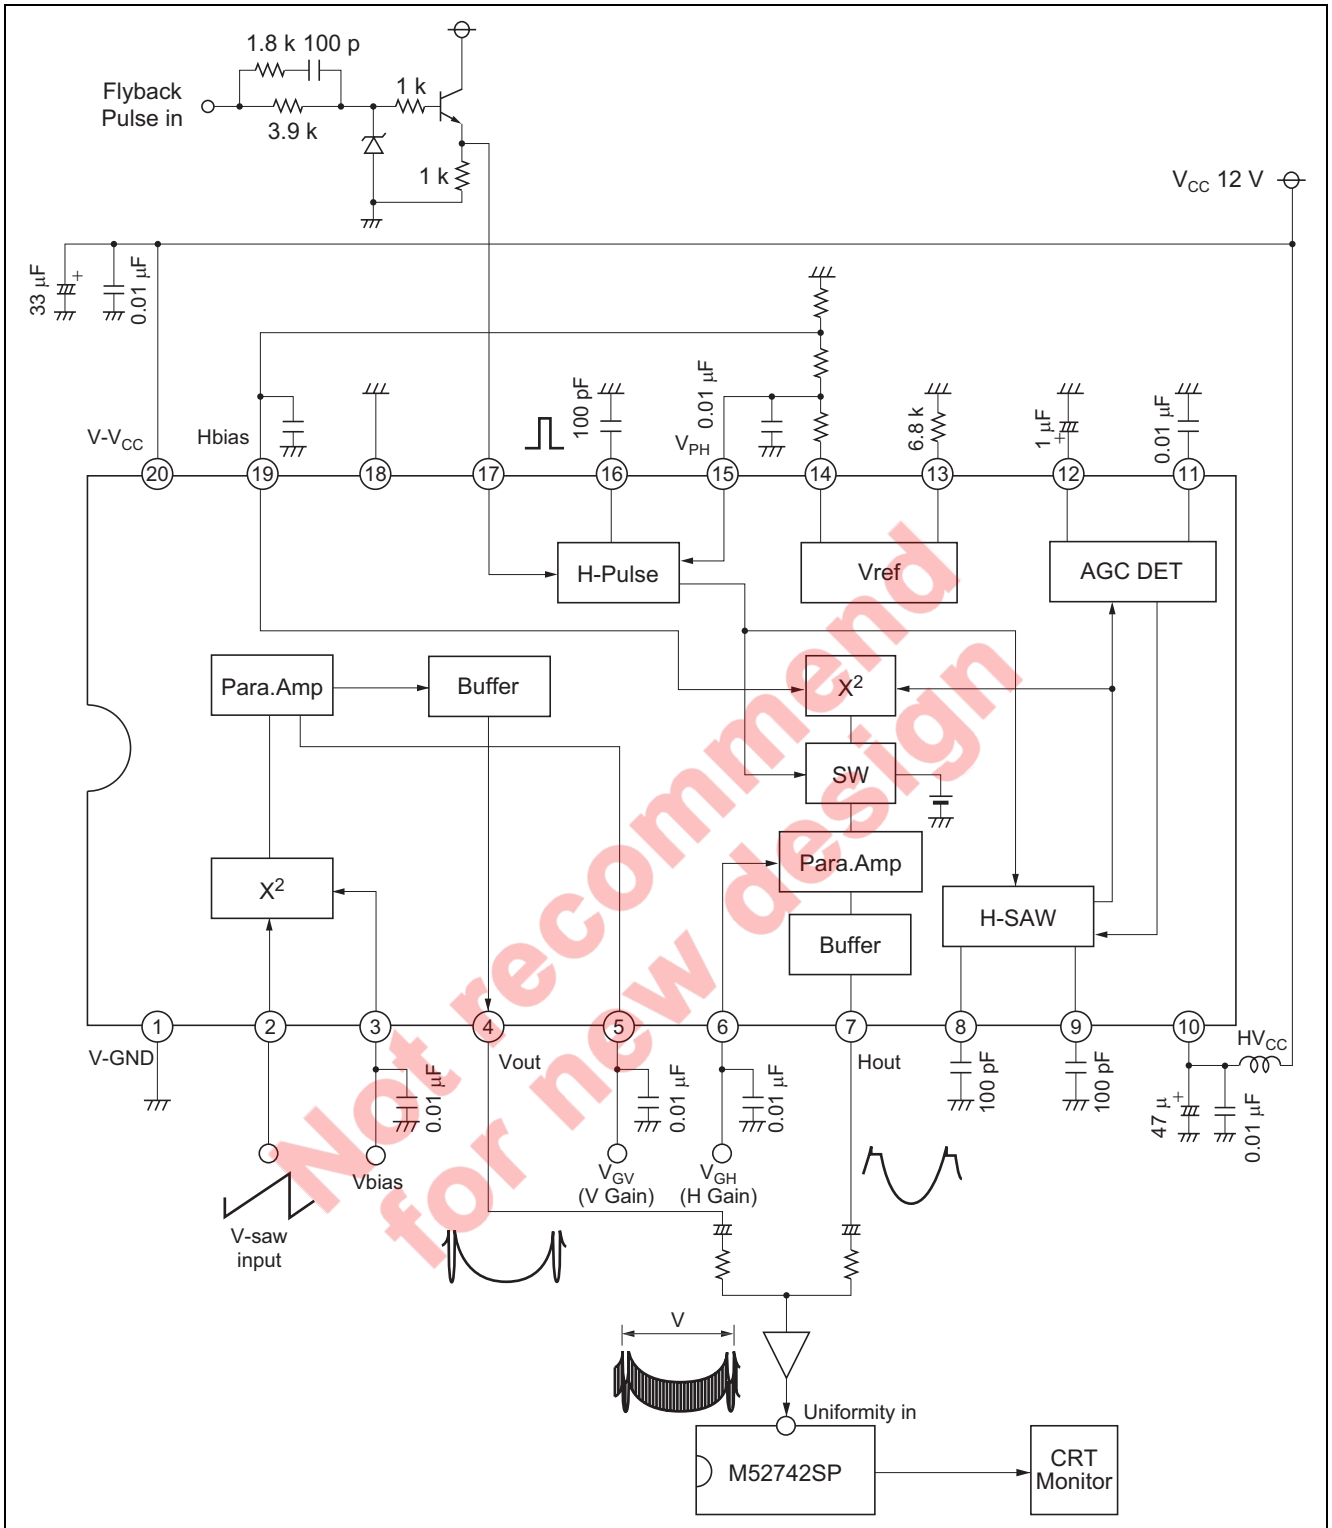

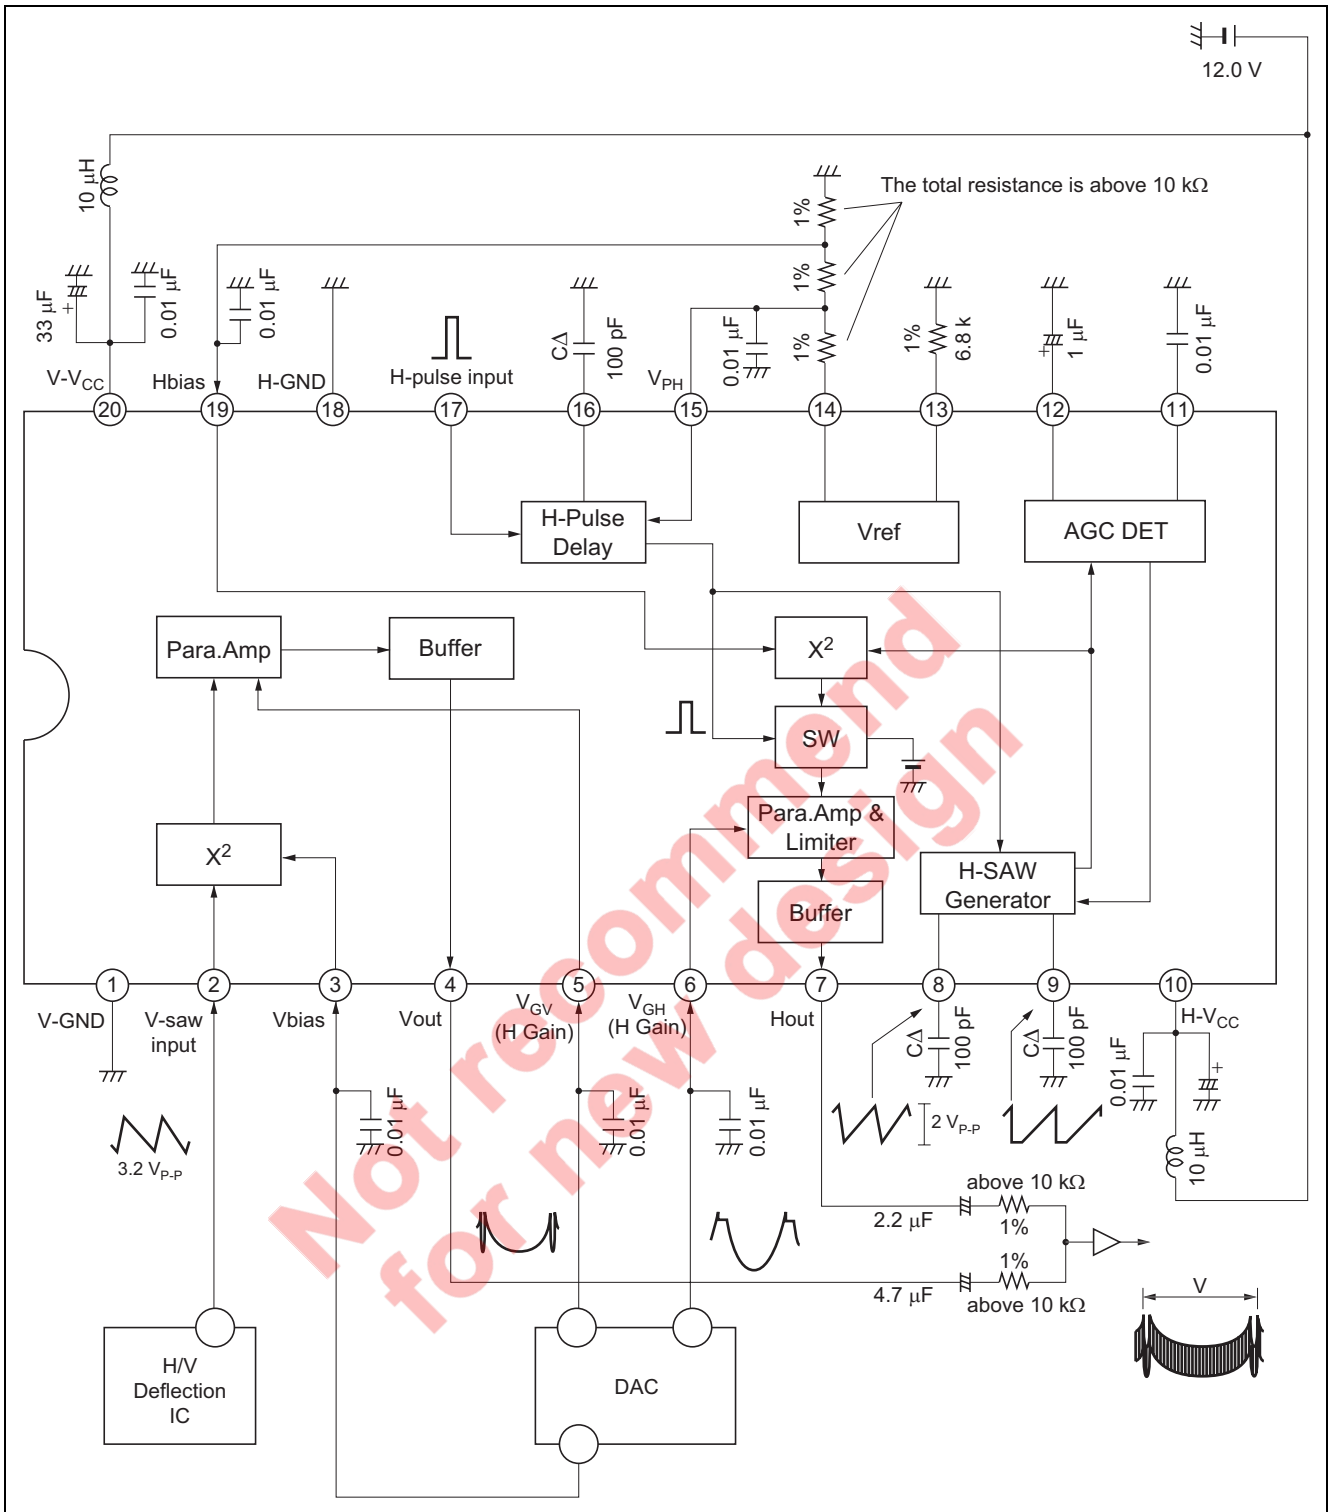

Pin Description

Pin No.	Name	DC Voltage (V)	Peripheral Circuit	Function
1	V-GND	—	—	GND of vertical block
2	Vsawi	3.5 V		Vertical sawtooth wave input pin.
3	Vbias	2.8 to 4.2 V		Vertical parabola unbalance control bias voltage input pin. Input voltage range is 2.8 to 4.2 V
4	Vout	5 V (Bottom)		Vertical parabola wave output pin. Bottom voltage = 5 V (fixed) Amplitude is possible to control by pin 5
5	V _{GV}	1.0 to 3.0 V		Vertical parabola wave gain control voltage input pin. Input voltage range is 1.0 to 3.0 V.
6	V _{GH}	1.0 to 4.0 V		Horizontal parabola wave gain control voltage input pin. Input voltage range is 1.0 to 4.0 V.

Pin Description (cont.)

Pin No.	Name	DC Voltage (V)	Peripheral Circuit	Function
7	Hout	2.4 to 9.2 V		Horizontal parabola wave output pin. Amplitude is possible to control by pin 6
8	Cret	7.1 V (Top) 4.9 V (Bottom)		Connection pin of horizontal retrace capacitor. Recommended capacitance is 100 pF.
9	Ctrc	7.1 V (Top) 4.9 V (Bottom)		Connection pin of horizontal trace capacitor. Recommended capacitance is 100 pF.
10	H-V _{CC}	12.0 V	—	V _{CC} of horizontal block.
11	C _{AGCr}	2.5 V		Connection pin of horizontal sawtooth wave AGC retrace capacitor. Recommended capacitance is 0.01 μF.

Pin Description (cont.)

Pin No.	Name	DC Voltage (V)	Peripheral Circuit	Function
12	C _{AGC}	4.0 V		<p>Connection pin of horizontal AGC capacitor.</p> <p>Recommended capacitance is 1 μF.</p>
13	V _{refr}	1.28 V		<p>Connection pin of reference current source resistor.</p> <p>Recommended resistance is 6.8 kΩ.</p>
14	V _{refo}	7.0 V		<p>Reference voltage output for horizontal pulse delay circuit.</p> <p>Should be connect more than 10 kΩ external resistor.</p>
15	V _{PH}	0 to 0.5 V 1.3 to 4.0 V		<p>Delay adjustment voltage input pin of horizontal pulse. Input voltage range is 1.3 to 4.0 V.</p> <p>At 0 to 0.5 V, delay is minimized. (0.5 to 1.3 V is unusable range.)</p>
16	Chpd	0 V (Bottom)		<p>Connection pin of horizontal pulse delay timing capacitor.</p> <p>Recommended capacitance is 100 pF.</p>


Pin Description (cont.)

Pin No.	Name	DC Voltage (V)	Peripheral Circuit	Function
17	HPin	—		Horizontal pulse input pin. Low input level is less than 2.0 V, and high is 3.0 to 10 V. (at $V_{CC} = 12$ V)
18	H-GND	—	—	GND of horizontal block
19	Hbias	5.7 to 6.4 V		Horizontal parabola unbalance control bias voltage input pin. Input voltage range is 5.7 to 6.4 V.
20	V- V_{CC}	12.0 V	—	V_{CC} of vertical block

Not recommended for new design

Package Dimensions

JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
P-SDIP20-6.3x19-1.78	PRDP0020BA-A	20P4B	1.0g

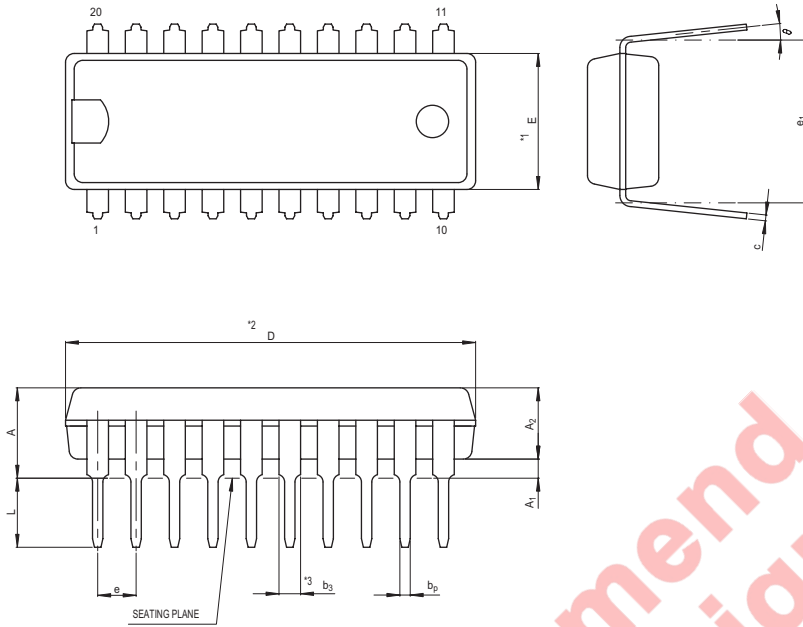

NOTE)
 1. DIMENSIONS **1* AND **2* DO NOT INCLUDE MOLD FLASH.
 2. DIMENSION **3* DOES NOT INCLUDE TRIM OFFSET.

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
e_1	7.32	7.62	7.92
D	18.8	19.0	19.2
E	6.15	6.3	6.45
A	—	—	4.5
A_1	0.51	—	—
A_2	—	3.3	—
b_p	0.38	0.48	0.58
b_3	0.9	1.0	1.3
c	0.22	0.27	0.34
θ	0°	—	15°
e	1.528	1.778	2.028
L	3.0	—	—

Not recommend for new design

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
 - (1) artificial life support devices or systems
 - (2) surgical implantations
 - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
 - (4) any other purposes that pose a direct threat to human lifeRenesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7858/7898

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2377-3473

Renesas Technology Taiwan Co., Ltd.
10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 3518-3399

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.
Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510