

DESCRIPTION

The M56759 is a semiconductor integrated circuit designed for a CD-ROM actuator driver. This device can function 4-channel-actuators by 1 chip due to include 4 channel BTL drivers. Three channels of this device, ch1, ch2 and ch3 can be controlled by PWM pulse. Two of them, ch1 and ch2 can also act in the Current Control mode. Furthermore, this device includes two mute circuits and TSD function.

FEATURES

- Low saturation voltage (at bootstrap).
- (typical 0.7V at load current 500mA)
- Wide supply voltage range.
(4.5V to 13.2V)
- Low cross-over distortion.
- Two naked Operational Amplifiers
- Divided Motor power supplies into three parts

APPLICATION


CD-ROM

PIN CONFIGURATION (TOP VIEW)

VCC2	1	○	42	MUTE2
VREF	2		41	MUTE1
VREF0	3		40	SOUT2
IN3-	4		39	SIN2-
IN3+	5		38	IN2+
Vm3	6		37	IN2-
OUT3	7		36	OUT2
VM3(-)	8		35	VM2(-)
VM3(+)	9		34	VM2(+)
GND	10	{	33	GND
	11	}	32	GND
VM4(+)	12		31	VM1(+)
VM4(-)	13		30	VM1(-)
IN4A-	14		29	OUT1
Vm2	15		28	IN1-
IN4B-	16		27	IN1+
OP1OUT	17		26	Vm1
OP1-	18		25	SIN1-
OP1+	19		24	SOUT1
OP2+	20		23	VCC1
OP2-	21		22	OP2OUT

Outline 42P2R-D

BLOCK DIAGRAM

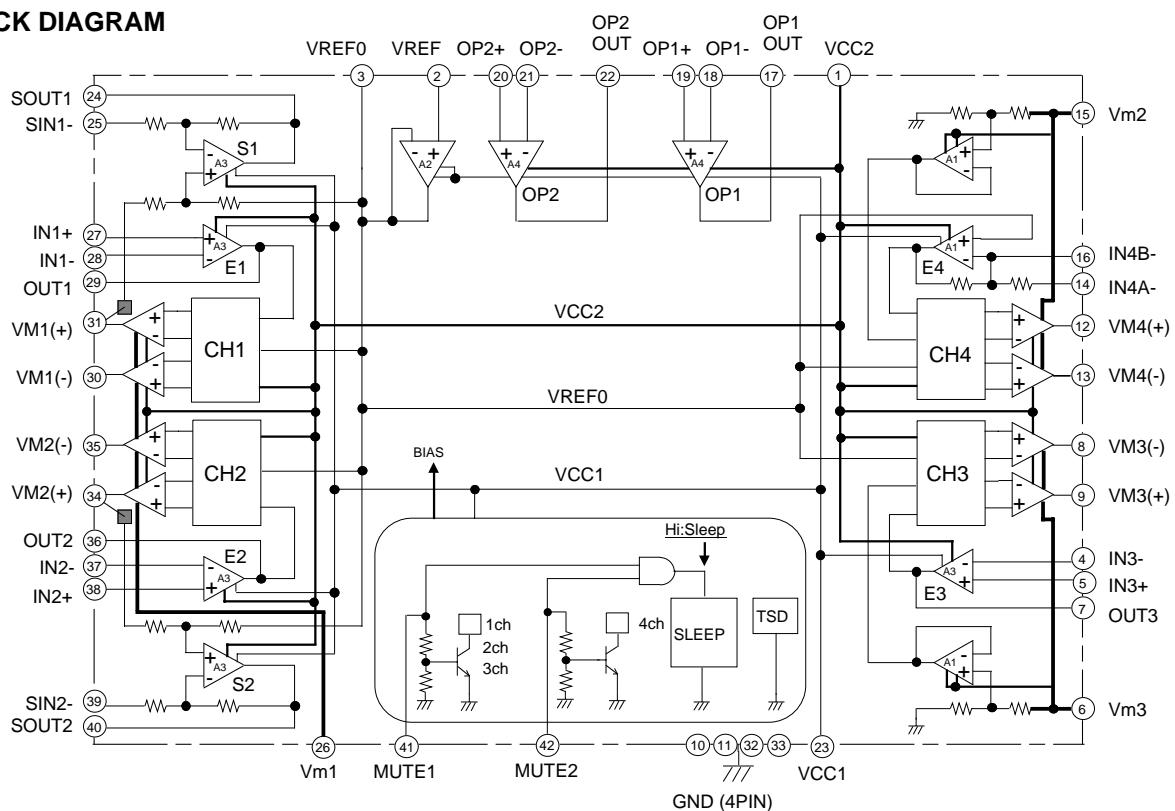

PIN DESCRIPTIONS

Pin No.	Symbol	Function	Pin No.	Symbol	Function
①	VCC2	Bootstrap power supply	②②	OP2OUT	OP2 amplifier output
②	VREF	Reference voltage input	②③	VCC1	5V power supply
③	VREF0	Reference voltage output	②④	SOUT1	S1 amplifier output
④	IN3-	E3 amplifier inverted input	②⑤	SIN1-	S1 amplifier inverted input
⑤	IN3+	E3 amplifier non-inverted input	②⑥	Vm1	Motor power supply-1
⑥	Vm3	Motor power supply-3	②⑦	IN1+	E1 amplifier non-inverted input
⑦	OUT3	E3 amplifier output	②⑧	IN1-	E1 amplifier inverted input
⑧	VM3(-)	CH3 inverted output	②⑨	OUT1	E1 amplifier output
⑨	VM3(+)	CH3 non-inverted output	②⑩	VM1(-)	CH1 inverted output
⑩ to ⑪	GND	GND	②⑪	VM1(+)	CH1 non-inverted output
⑫	VM4(+)	CH4 non-inverted output	②⑫ to ②⑬	GND	GND
⑬	VM4(-)	CH4 inverted output	②⑭	VM2(+)	CH2 non-inverted output
⑭	IN4A-	E4 amplifier low gain input	②⑮	VM2(-)	CH2 inverted output
⑮	Vm2	Motor power supply-2	②⑯	OUT2	E2 amplifier output
⑯	IN4B-	E4 amplifier high gain input	②⑰	IN2-	E2 amplifier inverted input
⑰	OP1OUT	OP1 amplifier output	②⑱	IN2+	E2 amplifier non-inverted input
⑲	OP1-	OP1 amplifier inverted input	②⑲	SIN2-	S2 amplifier inverted input
⑳	OP1+	OP1 amplifier non-inverted input	②⑳	SOUT2	S2 amplifier output
㉑	OP2+	OP2 amplifier non-inverted input	②㉑	MUTE1	CH1, 2 and 3 mute
㉒	OP2-	OP2 amplifier inverted input	㉒㉓	MUTE2	CH4 mute

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Conditions	Rating	Unit
VCC2	Bootstrap power supply	① pins input voltage	15	V
Vm	Motor power supply	②, ⑯ and ⑬ pins input voltage	15	V
VCC1	5V power supply	②③ pin input voltage	7.0	V
Io	Output Current		700	mA
Vin1	Maximum input voltage of terminals	②, ④, ⑤, ⑬, ⑯, ⑭, ⑮, ⑰, ⑱, ⑲, ⑳, ㉑ pins	0 – VCC1	V
Vin2		②⑮, ⑲ pins	0 – Vm1	
Pt	Power dissipation	Free Air	1.2	W
Kθ	Thermal derating	Free Air	9.6	mW/°C
Tj	Junction temperature		150	°C
Topr	Operating temperature		-20 – +70	°C
Tstg	Storage temperature		-40 – +150	°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
VCC1	5V power supply	4.5	5.0	5.5	V
VCC2	Bootstrap power supply		Vm+1.0		V
Vm1,2,3	Motor power supply-1, 2, 3		5.0		V


ELECTRICAL CHARACTERISTICS

(Ta=25°C, VCC1=Vm1=Vm2=Vm3=5V, VCC2=12V, no-load current unless otherwise noted)


Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
ICC1	Supply current-1	(1), (26), (15), (6) pins supply current (Vref=Vctl=2.5V)	—	24	36	mA
ICC2	Supply current-2	(23) pins[VCC1] supply current (Vref=Vctl=2.5V)	—	9.5	15	mA
ICC3	Sleep Mode Supply current-3	(1), (23), (26), (15), (6) pins supply current (MUTE1,2=H)	—	—	500	μA
VsatCH1	Ch1 Saturation voltage	Top and Bottom saturation voltage. Load current 500mA. At bootstrap.	—	0.8	1.20	V
VsatCH2	Ch2 Saturation voltage		—	0.8	1.20	V
VsatCH3	Ch3 Saturation voltage		—	0.5	0.9	V
VsatCH4	Ch4 Saturation voltage		—	0.6	1.0	V
Vmute-on	Mute-on voltage	Mute-on	2.0	—	—	V
Vmute-off	Mute-off voltage	Mute-off	—	—	0.8	V
Imute	Mute terminals input current	(41)and (42)pin input current at 5V input voltage.	—	170	250	μA
VinOP	OP1 and OP2 amplifier Input voltage range		0.5	—	VCC2-1.0	V
VoutOP	OP1 and OP2 amplifier output voltage range	Io=±2.0mA	0.5	—	VCC1-0.5	V
VofOP	OP1 and OP2 amplifier input offset voltage	Vin=2.5V (at buffer)	-10	—	+10	mV
linOP	OP1 and OP2 amplifier input current	inverted input = non-inverted input = 2.5V	-1.0	-0.15	0	μA
lofOP	OP1 and OP2 amplifier input current offset	inverted input = non-inverted input = 2.5V	-100	0	+100	nA
GBOP	OP1 and OP2 amplifier GB		2.3	4	—	MHz
VinE	E1,E2 and E3 amplifier Input voltage range		0.5	—	VCC2-2.0	V
VoutE	E1,E2 and E3 amplifier output voltage range	No load	1.0	—	VCC1-0.5	V
VofE	E1,E2 and E3 amplifier input offset voltage	Vin=2.5V (at buffer)	-10	—	+10	mV
linE	E1,E2 and E3 amplifier input current	inverted input = non-inverted input = 2.5V	-1.0	-0.15	0	μA
lofE	E1,E2 and E3 amplifier input current offset	inverted input = non-inverted input = 2.5V	-100	0	+100	nA
VoutS	S1 and S2 amplifier output voltage range	No load	1.0	—	VCC1-0.5	V
VinVREF	VREF buffer amplifier Input voltage range		1.5	2.5	VCC1-1.2	V
VofVREF	VREF buffer amplifier offset voltage	(2)pin input voltage = 2.5V	-10	—	+10	mV
VofCH1	Ch1 output offset voltage	when the OUT1 voltage is adjusted at the same VREFO voltage, at VREF=2.5V	-26	—	+26	mV
VofCH2	Ch2 output offset voltage	when the OUT2 voltage is adjusted at the same VREFO voltage, at VREF=2.5V	-26	—	+26	mV
VofCH3	Ch3 output offset voltage	when the OUT3 voltage is adjusted at the same VREFO voltage, at VREF=2.5V	-26	—	+26	mV
VofCH4	Ch4 output offset voltage	when the IN4- voltage is adjusted at the same VREFO voltage, at VREF=2.5V	-26	—	+26	mV
VofS1	S1 output offset voltage	SOUT1-VREFO (at SI N1[-] = VM1[+]) at VREF=2.5V	-20	—	+20	mV
VofS2	S2 output offset voltage	SOUT2-VREFO (at SI N2[-] = VM2[+]) at VREF=2.5V	-20	—	+20	mV
GainCH1	Ch1 power amplifier voltage gain	$\frac{\{VM1(+)-VM1(-)\}}{(OUT1-VREFO)}$ at VREF=2.5V	13.1	14	14.8	dB
GainCH2	Ch2 power amplifier voltage gain	$\frac{\{VM2(+)-VM2(-)\}}{(OUT2-VREFO)}$ at VREF=2.5V	13.1	14	14.8	dB
GainCH3	Ch3 power amplifier voltage gain	$\frac{\{VM3(+)-VM3(-)\}}{(OUT3-VREFO)}$ at VREF=2.5V	19.1	20	20.8	dB
GainCH4	Ch4 power amplifier voltage gain	$\frac{-1 \cdot \{VM4(+)-VM4(-)\}}{(IN4A[-]-VREFO)}$ at VREF=2.5V	3.17	4.08	4.91	dB
GainS1	S1 amplifier voltage gain	$\frac{\{SOUT1 - VREFO\}}{(VM1[+] - SI N1[-])}$ at VREF=2.5V	5.11	6.02	6.85	dB
GainS2	S2 amplifier voltage gain	$\frac{\{SOUT2 - VREFO\}}{(VM2[+] - SI N2[-])}$ at VREF=2.5V	5.11	6.02	6.85	dB

INPUT and OUTPUT CHARACTERISTICS of EACH CHANNELS


CH1 amplifier

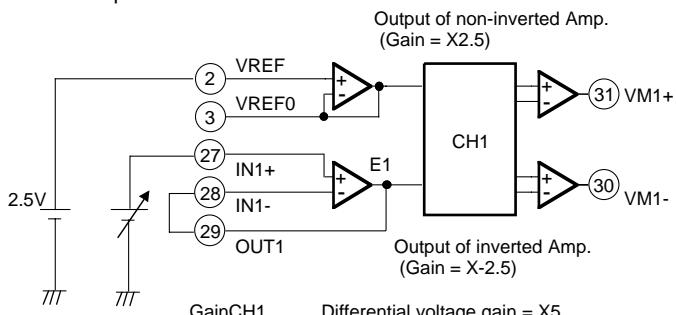


<INPUT>

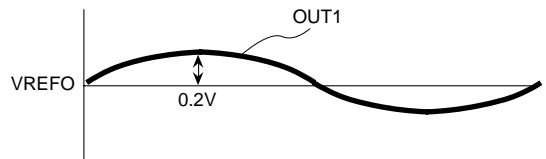


<OUTPUT>

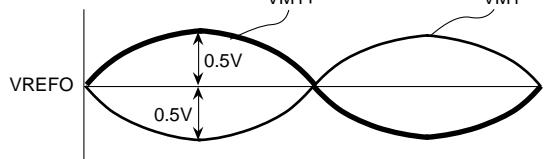


CH2 amplifier

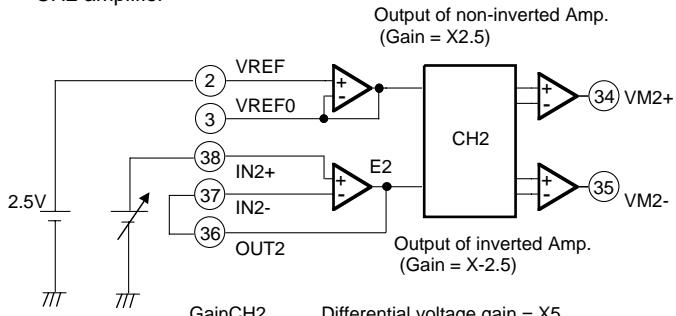


<INPUT>

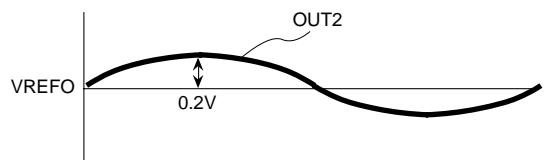


<OUTPUT>

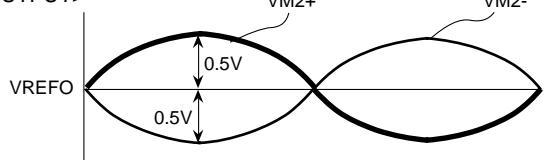


CH3 amplifier

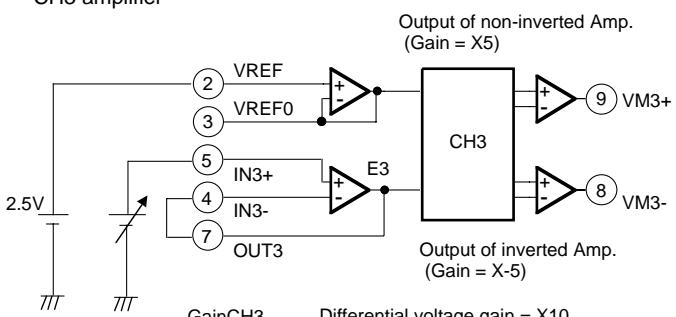







<INPUT>

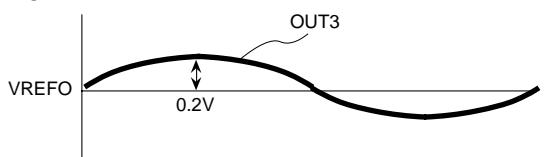

<OUTPUT>

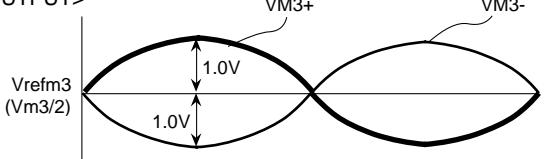

4-CHANNEL ACTUATOR DRIVER

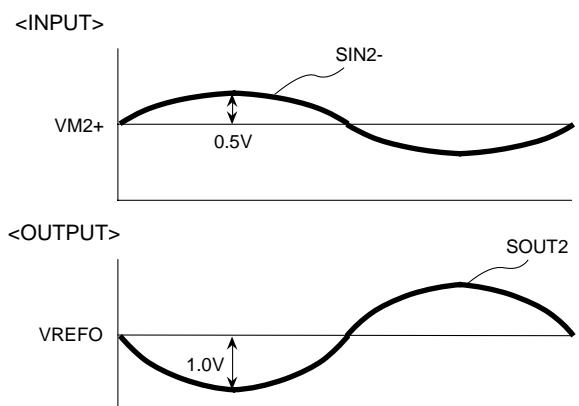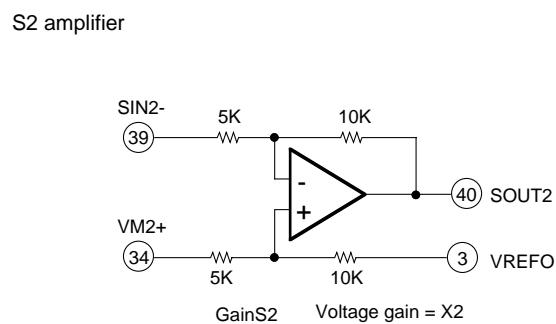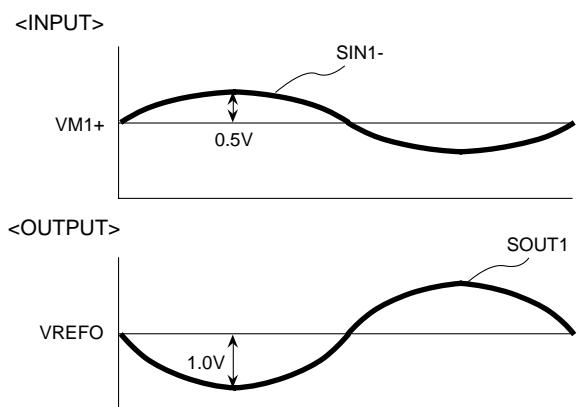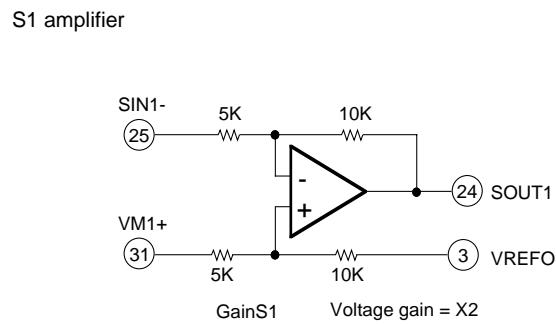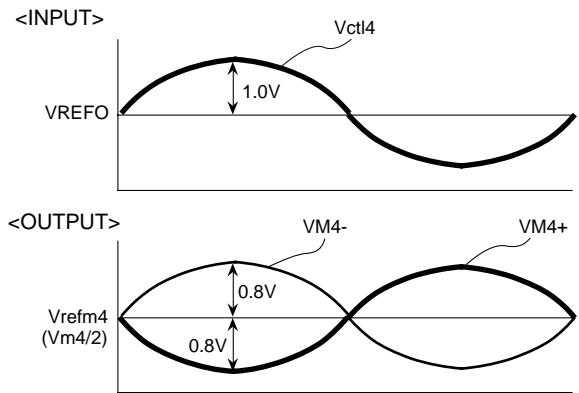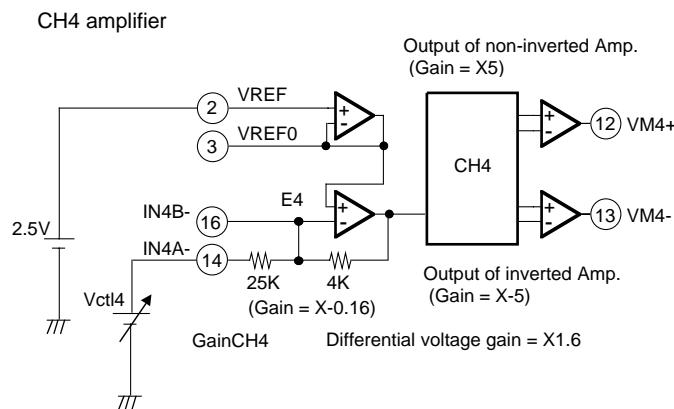


<BASICALLY CHARACTERISTICS>

This data is an example for typical sample.


Output saturation voltage and Load current characteristic.

BOOTSTRAP


CH1

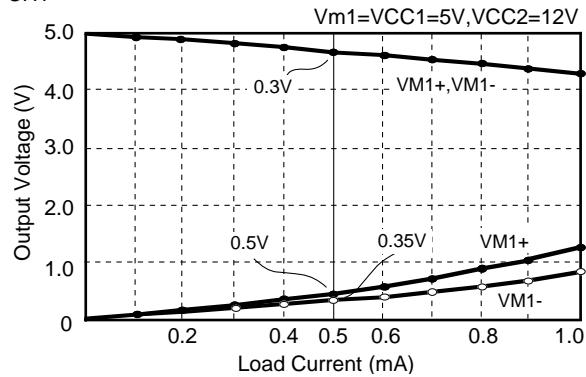


CH2

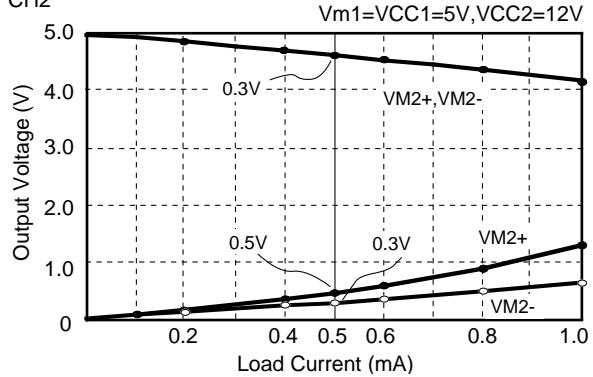

CH3

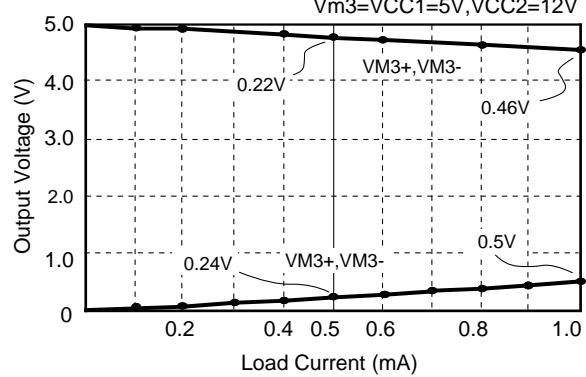


CH4

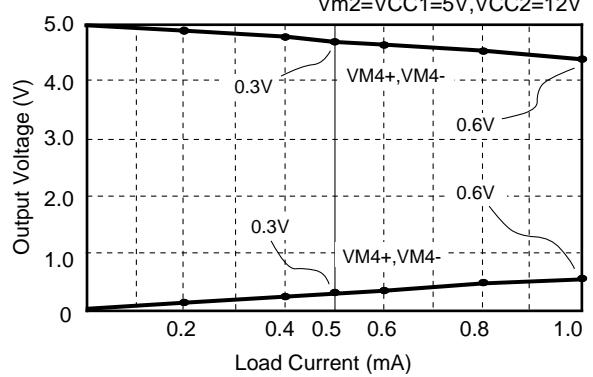


NON-BOOTSTRAP


CH1

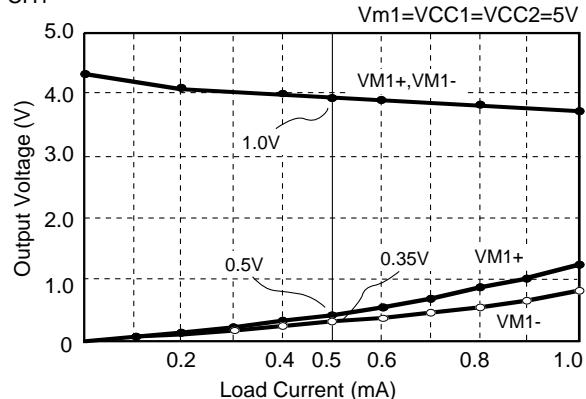


CH2

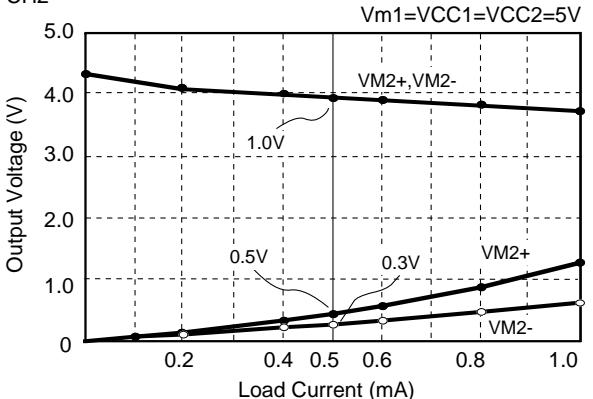


CH3

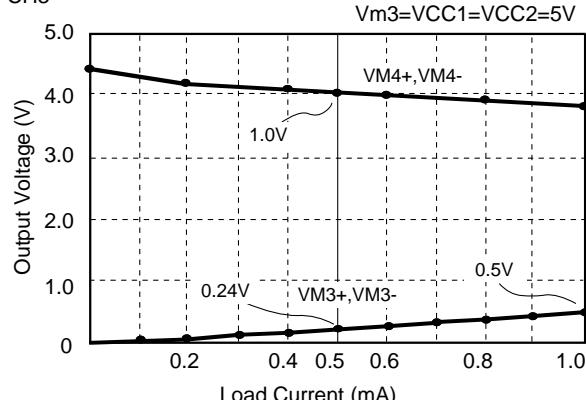

CH4

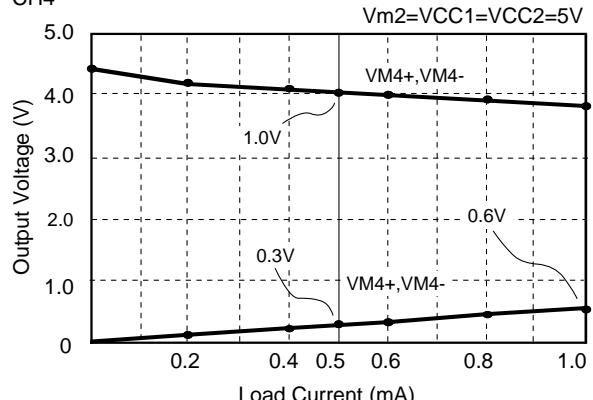


THERMAL DERATING

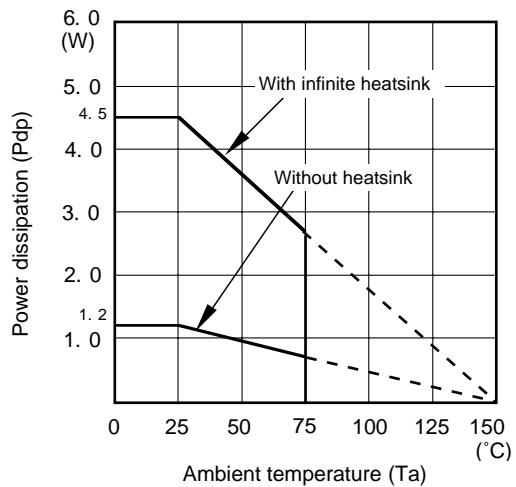

APPLICATION CIRCUIT No.1

- single input (linear signal)
- Direct voltage control

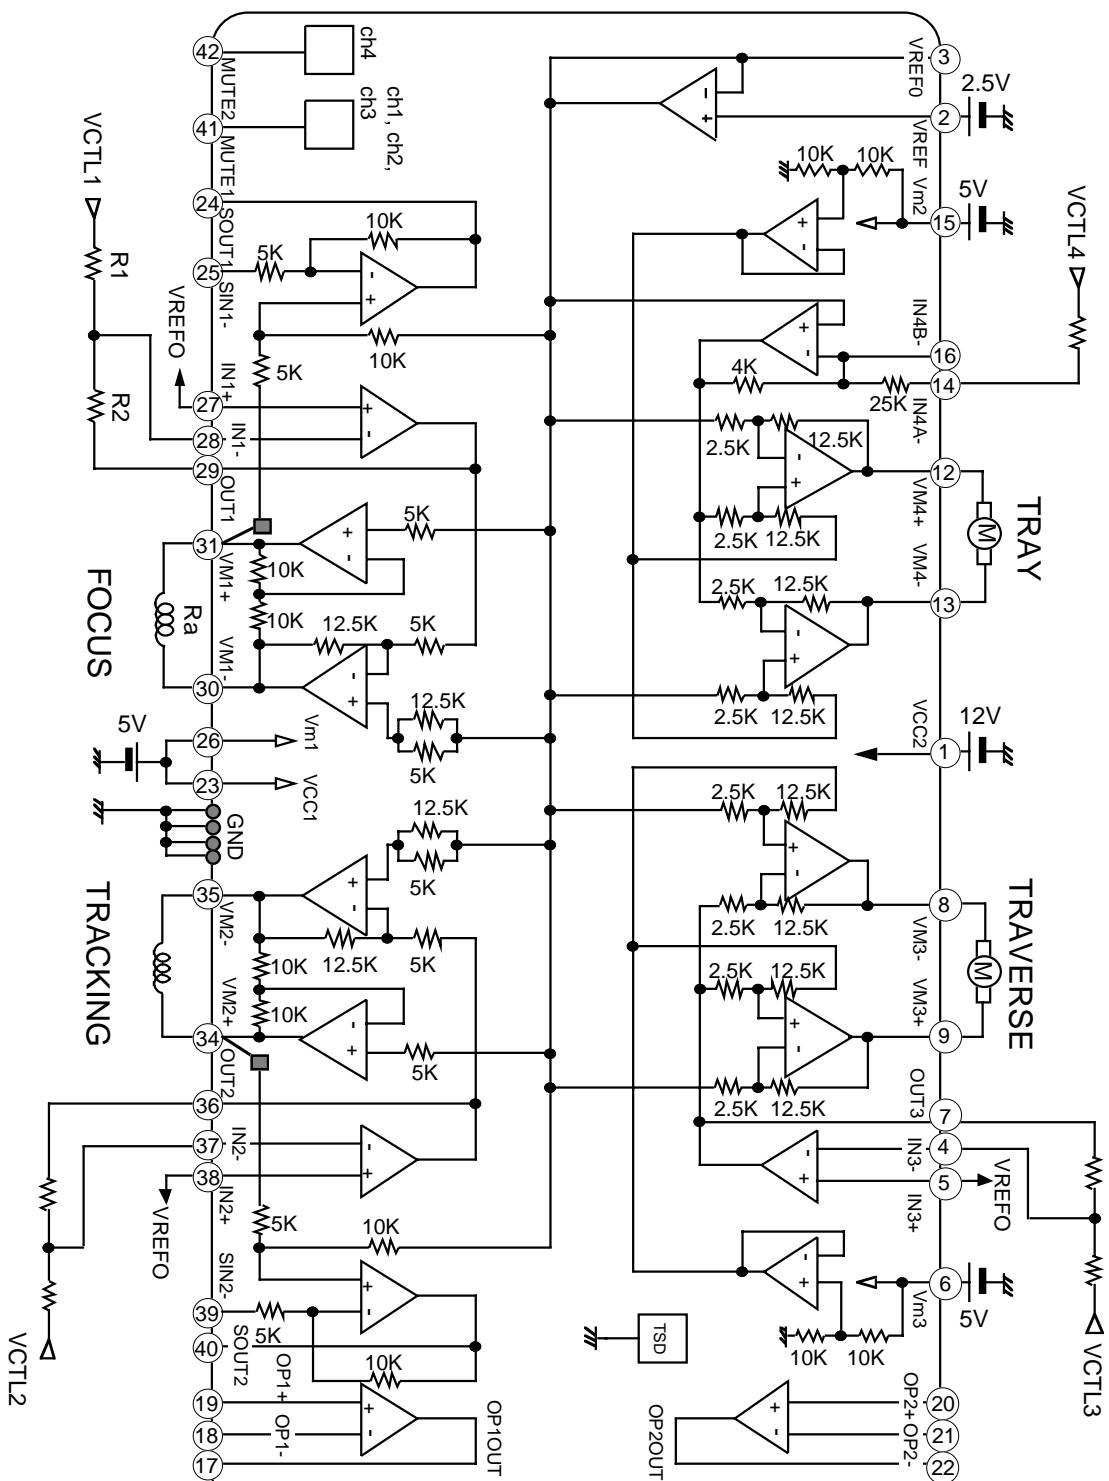

cf. $R_1 = 10\text{K}$, $R_2 = 14\text{K}$


$$\begin{aligned} \text{Voltage gain} &= \text{GainCH1} \cdot R_2 / R_1 \\ &= 5 \cdot 14 / 10 \\ &= 7 (\text{V/V}) = 16.9\text{dB} \end{aligned}$$

if. $R_a = 10$

$$\text{Current gain} = 7/10 = 0.7 (\text{A/V})$$


APPLICATION CIRCUIT No.2

- single input (linear signal)
- Direct current control (for FOCUS and TRACKING)

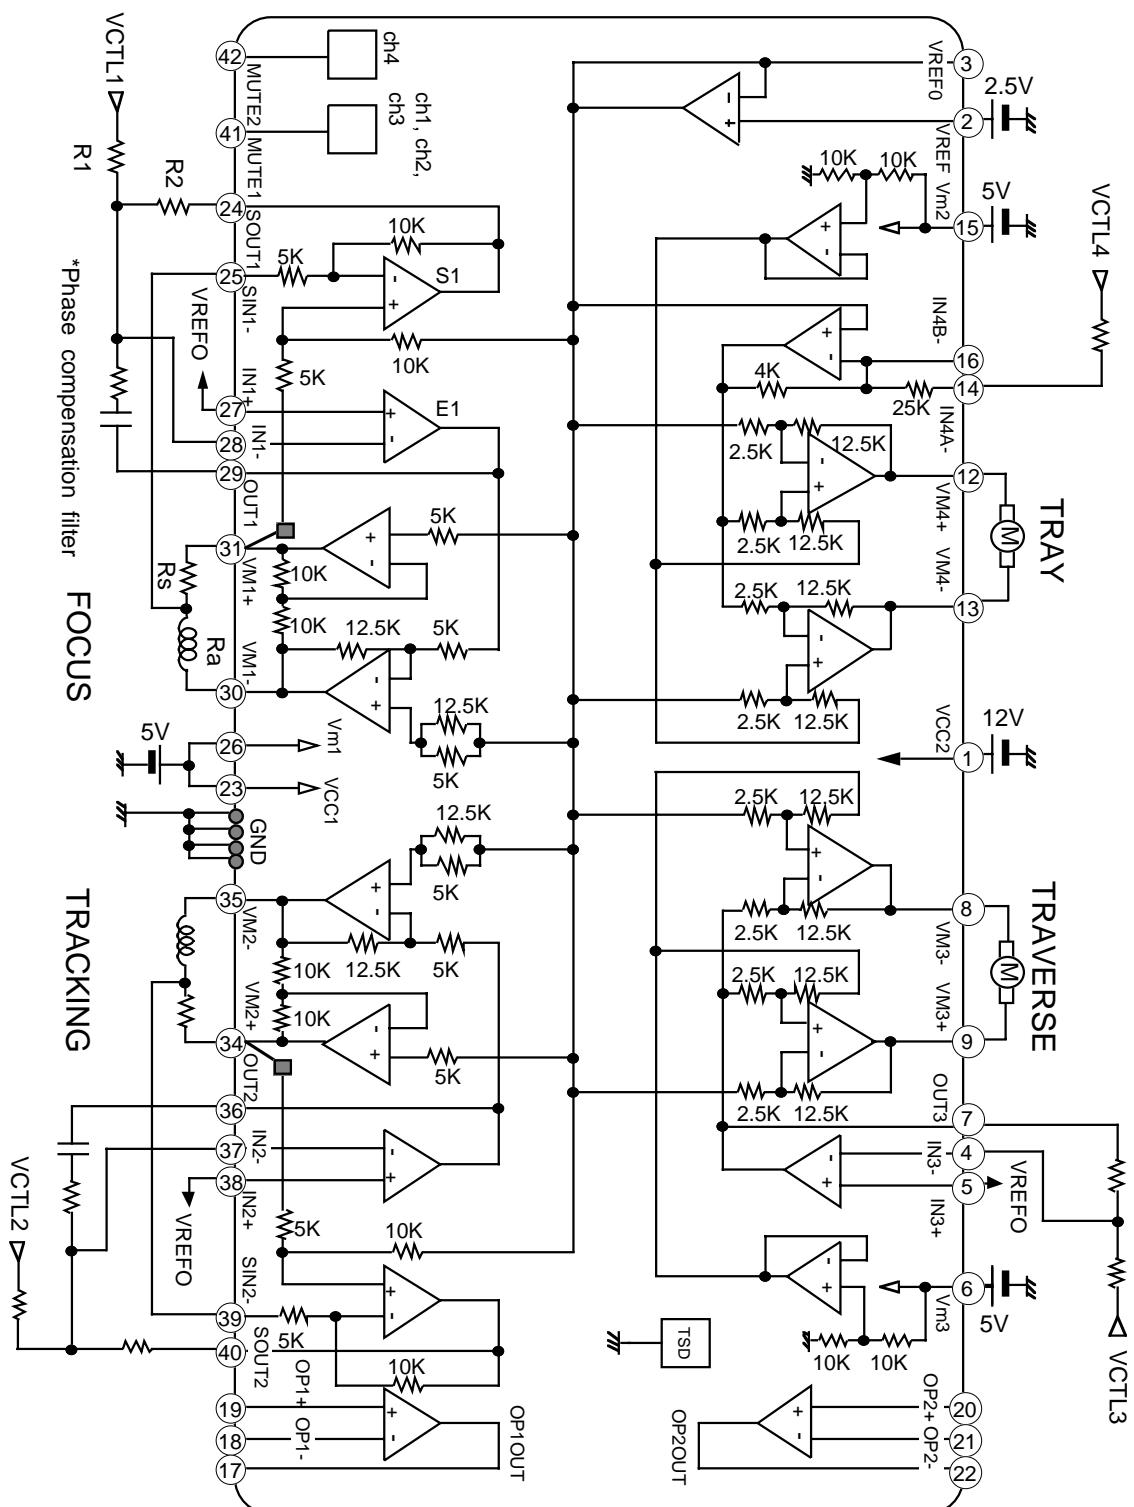

APPLICATION CIRCUIT No.3

- Differential PWM input (for FOCUS, TRACKING and TRAVERSE)
- Direct voltage control

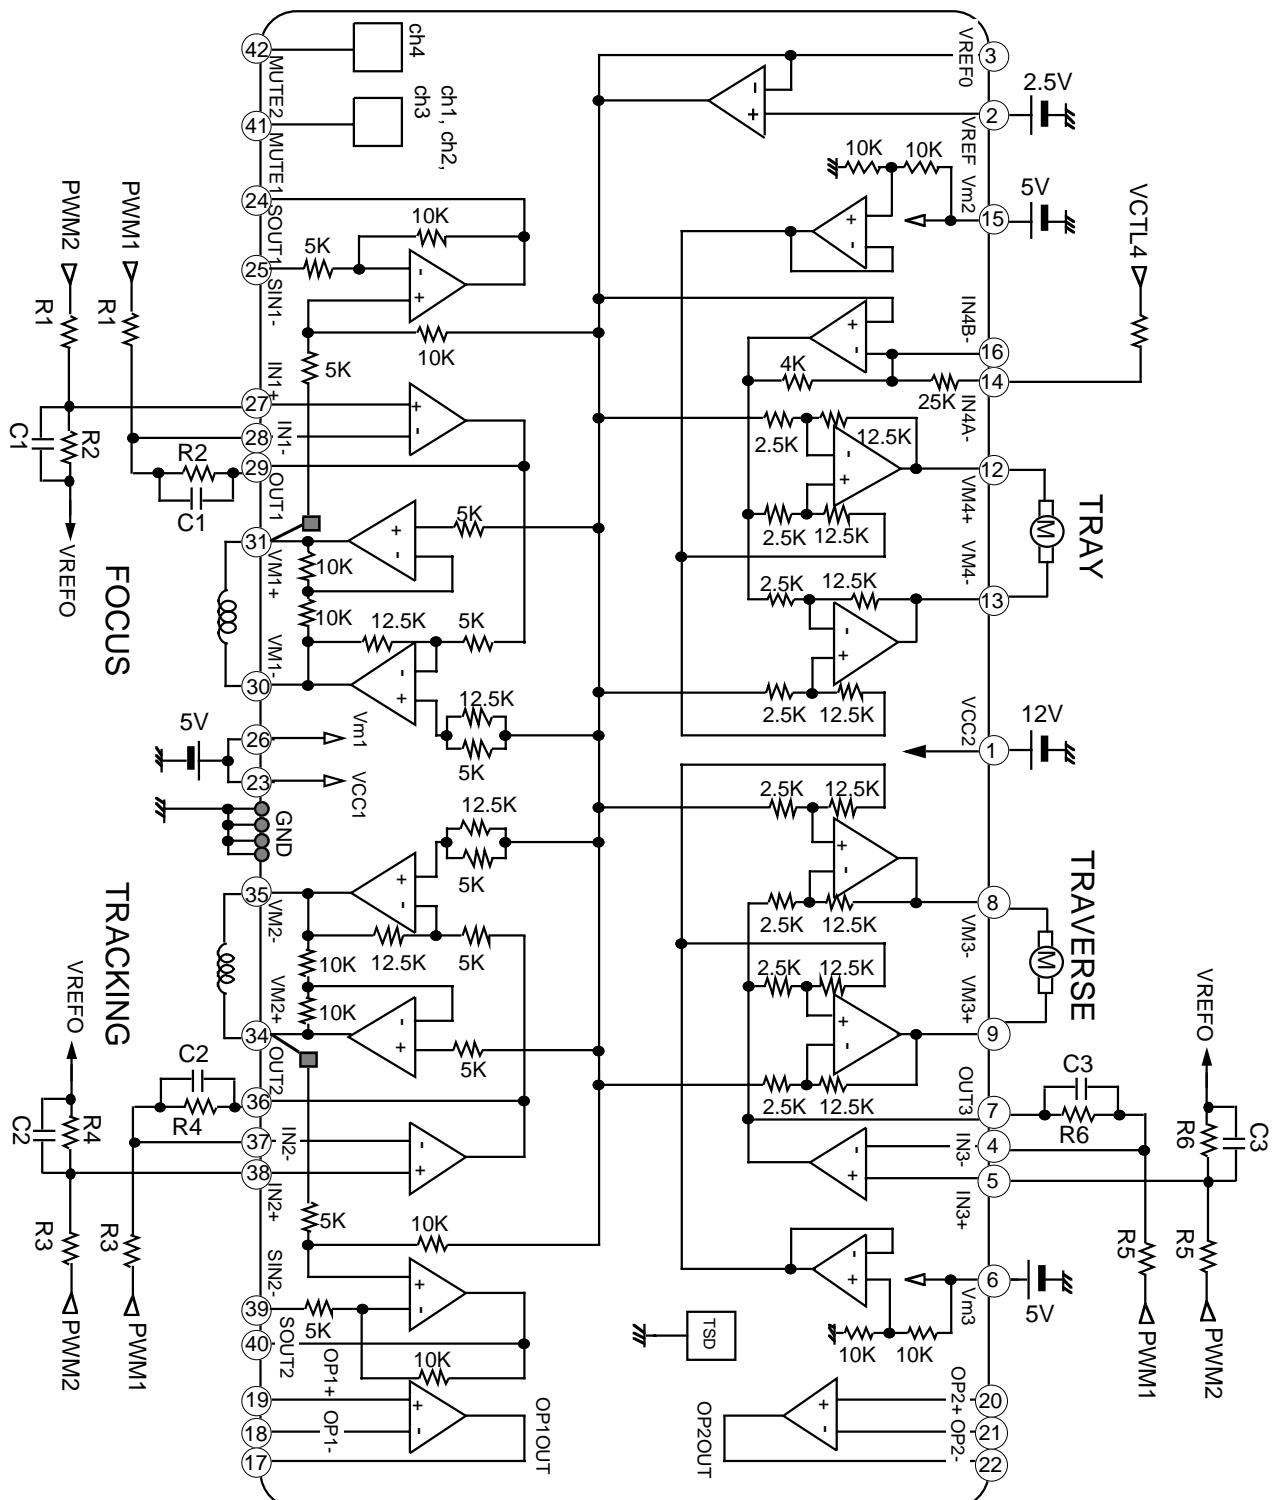

APPLICATION CIRCUIT No.4

- Differential PWM input (for FOCUS, TRACKING and TRAVERSE)
- Direct current control (for FOCUS and TRACKING)

