




# S5A THRU S5M

## SURFACE MOUNT GENERAL RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 6.0 Amperes

### DO-214AB/SMC

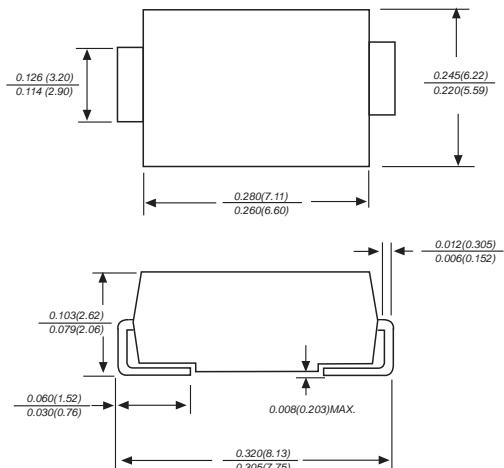

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

### MECHANICAL DATA

**Case:** JEDEC DO-214AB molded plastic body

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.007 ounce, 0.25grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


YFW Catalog Number	SYMBOLS	S5A	S5B	S5D	S5G	S5J	S5K	S5M	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V <sub>Dc</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at TL=75°C	I <sub>(AV)</sub>	5.0						Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	200.0						Amps	
Maximum instantaneous forward voltage at 6.0A	V <sub>F</sub>	1.2						Volts	
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>	5.0 100.0						µA	
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	60.0						pF	
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub>	10.0						°C/W	
Operating junction and storage temperature range	T <sub>J,Tstg</sub>	-55 to +150						°C	

\*Pulse test: Pulse width 200 µsec, Duty cycle 2%

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.


## RATINGS AND CHARACTERISTIC CURVES S5A THRU S5M

Figure 1  
Typical Forward Characteristics

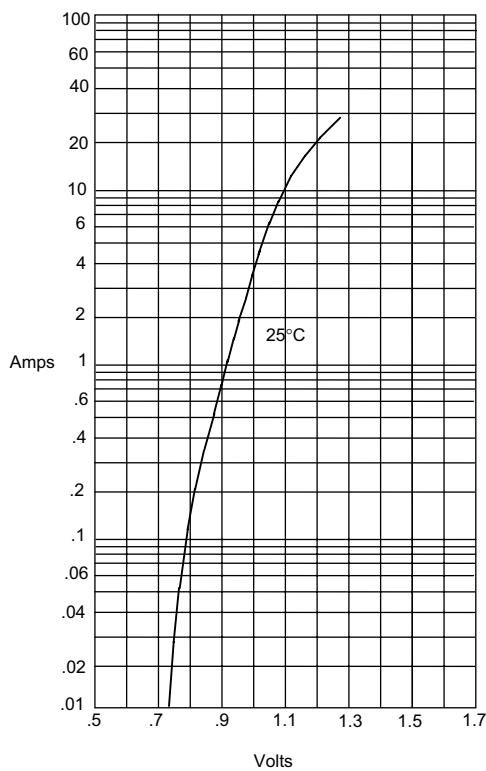


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

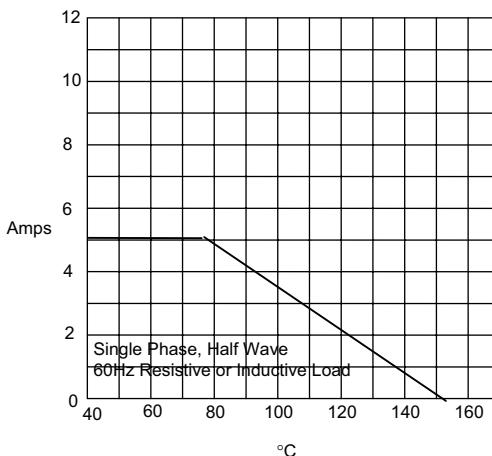

Average Forward Rectified Current - Amperes versus  
Case Temperature - °C


Figure 3  
Junction Capacitance

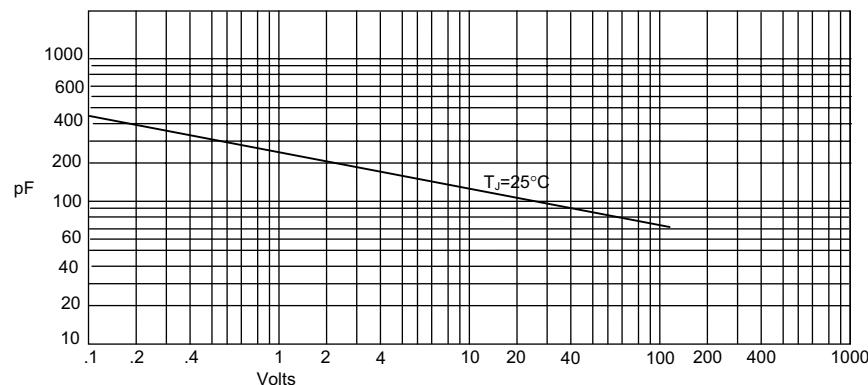

Junction Capacitance - pF versus  
Reverse Voltage - Volts


## RATINGS AND CHARACTERISTIC CURVES S5A THRU S5M

Figure 4  
Typical Reverse Characteristics

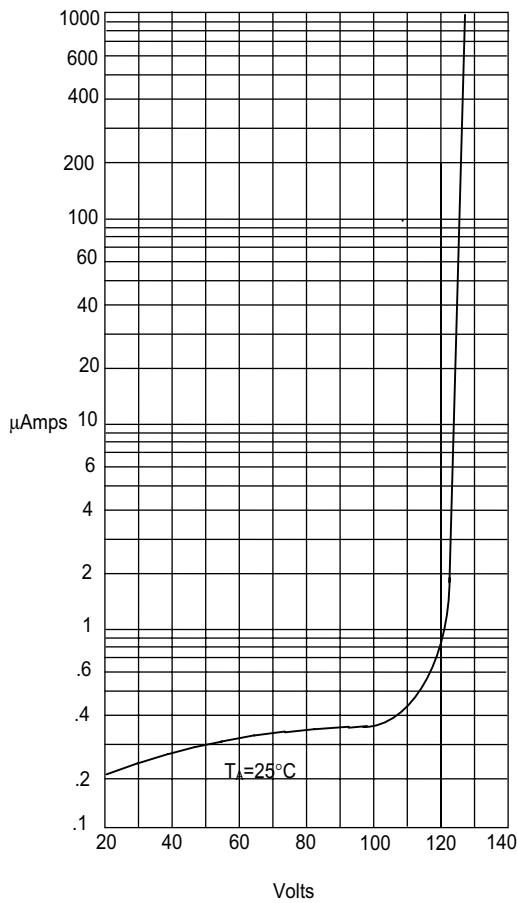

Instantaneous Reverse Leakage Current - MicroAmperes versus  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

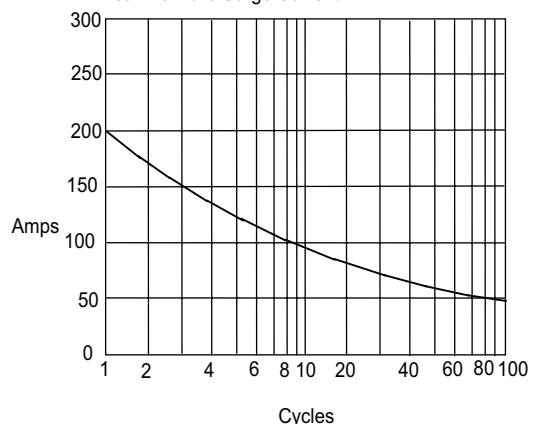

Peak Forward Surge Current - Amperes versus  
Number Of Cycles At 60Hz - Cycles