

DESCRIPTION

RS2535 is a highly integrated current mode PWM power switch. It built in patent High voltage startup, optimized for high performance, exhibit extra low standby power consumption (<30mW) and costs effective offline flyback converter applications.

PWM switching frequency at normal operation is internally fixed. At no load or light load condition, it operates in burst mode to minimize switching loss. Less than 30mW standby power consumption and very high conversion efficiency is thus achieved. Patent high voltage startup is implemented in RS2535, which features with short startup time and extra low standby current.

RS2535 offers rich protections with auto-recovery including Cycle-by-Cycle current limiting (OCP), over load protection (OLP), VDD under voltage lockout (UVLO), and over temperature protection (OTP), VDD over voltage protection (OVP). It also provides the protection with latched shut down including VDD over voltage protection. Excellent EMI performance is achieved with RS2535 proprietary frequency burst technique. The frequency at below 22kHz is minimized to avoid audible noise during operation.

APPLICATIONS


Offline AC/DC Fly-back Converter for

- AC/DC Adapter
- PDA Power Supplies
- Digital Cameras and Camcorder Adapter
- VCR, SVR, STB, DVD&DVCD Player SMPS
- Set-Top Box Power
- Auxiliary Power Supply for PC and Server
- Open-frame SMPS

FEATURES


- Built-in 700V High Voltage Startup
- Patent High voltage startup technique
- Extra Low Standby (<30mW)
- Integrated with HV MOSFET
- Power on Soft Startup
- Frequency spreading to Minimize EMI
- Audio Noise Free Operation
- Fixed 65kHz Switching Frequency
- Brownout function
- Comprehensive Protection
- VDD Under Voltage Lockout with Hysteresis (UVLO)
- Cycle-by-cycle Over Current Protection (OCP)
- Overload Protection (OLP) with Auto-recovery
- Over Temperature Protection (OTP) with Auto-recovery
- VDD Over Voltage Protection (OVP) with Auto-recovery

BLOCK DIAGRAM

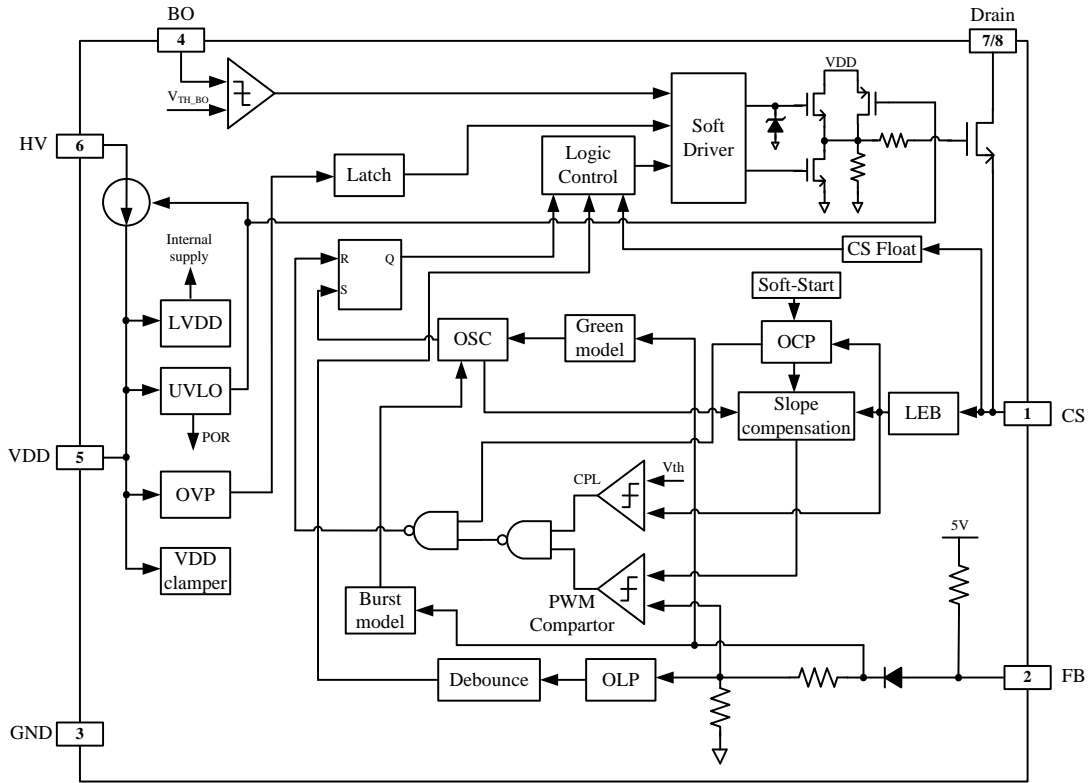

Simplified Internal Circuit Architecture


APPLICATION CIRCUITS

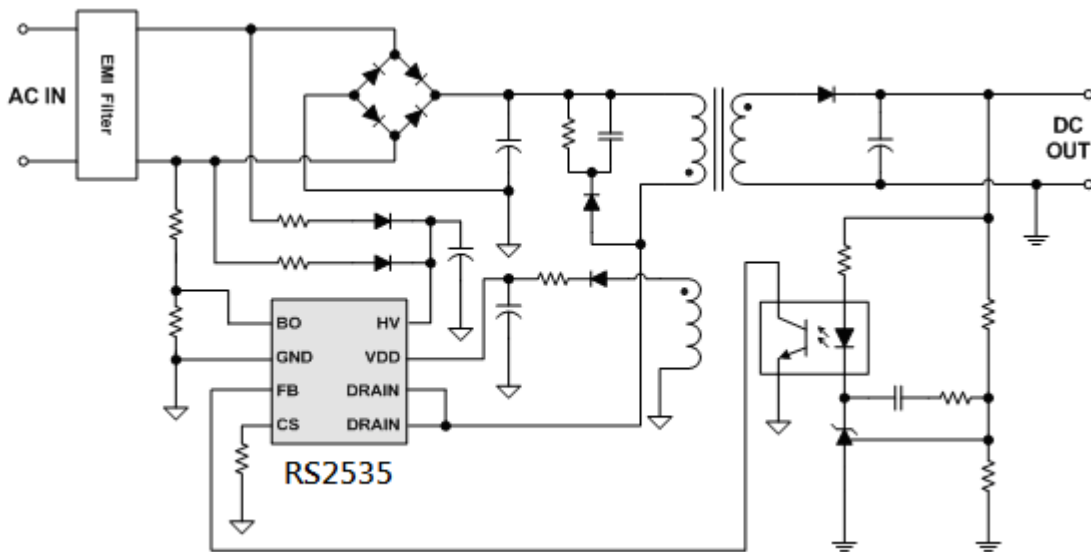

ORDERING INFORMATION

Device	Device Code
RS2535 Y Z	Y is package & pin assignments designator : D : DIP-8 Z is Lead Free designator : P: Commercial Standard, Lead (Pb) Free and Phosphorous (P) Free Package

PIN ASSIGNMENTS

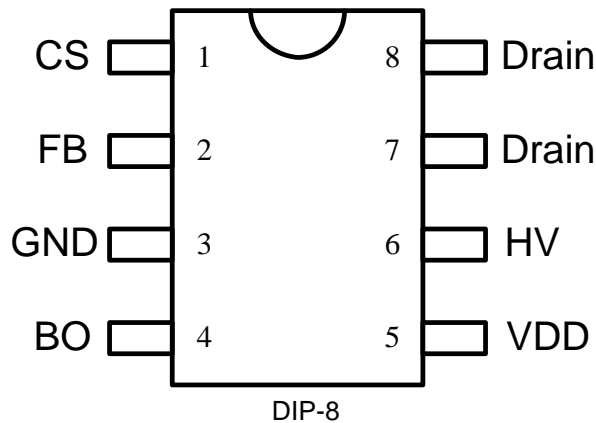

PIN DESCRIPTION

Pin Name	Description	Pin No.
CS	Current sense input.	1
FB	Feedback input pin. The PWM duty cycle is determined by voltage level into this pin and the current-sense signal at CS pin.	2
GND	Ground	3
BO	Connected resistors for brownout protection	4
VDD	Power Supply	5
HV	Connected to the line input or bulk capacitor via resistors for startup.	6
Drain	HV MOSFET Drain Pin. The Drain pin is connected to the primary lead of the transformer.	7,8

IMPORTANT NOTICE

Princeton Technology Corporation (PTC) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and to discontinue any product without notice at any time. PTC cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a PTC product. No circuit patent licenses are implied.

Princeton Technology Corp.
2F, 233-1, Baociao Road,
Sindian Dist., New Taipei City 23145, Taiwan
Tel: 886-2-66296288
Fax: 886-2-29174598
<http://www.princeton.com.tw>