

10A05G THRU 10A10G

General Purpose Plastic Rectifier


REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 10 Ampere

FEATURES

- ◆ Low forward voltage drop
- ◆ Low leakage current
- ◆ High forward surge capability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length at
5 lbs (2.3kg) tension
- ◆ Glass Passivated chip junction

Mechanical Data

- ◆ Case: Transfer molded plastic
- ◆ Epoxy: UL94V-0 rate flame retardant
- ◆ Polarity: Color band denotes cathode end
- ◆ Lead: Plated axial lead, solderable per
MIL-STD-202E method 208C
- ◆ Mounting position: Any

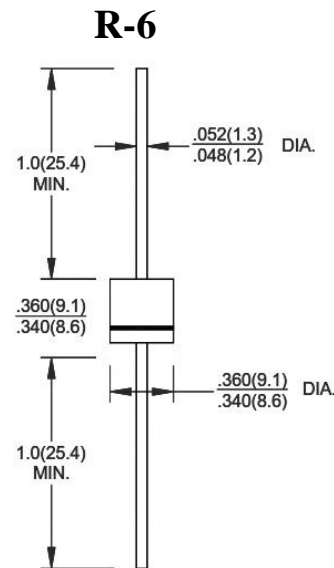

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOL	10A05G	10A1G	10A2G	10A3G	10A6G	10A8G	10A10G	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (FIG.1) 0.375" (9.5mm) lead length at $T_A=50^\circ\text{C}$	$I_{(AV)}$	10							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	400							Amps
Maximum Instantaneous Forward Voltage at 10A	V_F	1.1							Volts
Maximum DC Reverse Current $T_A=25^\circ\text{C}$ at rated DC Blocking voltage $T_A=100^\circ\text{C}$	I_R	10 100							μA
Typical Junction Capacitance (NOTE 1)	C_J	125							pF
Typical Thermal Resistance	$R_{\theta JA}$	8							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

Note: 1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

10A05G THRU 10A10G

General Purpose Plastic Rectifier

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 10 Ampere

RATING AND CHARACTERISTIC CURVES 10A05G THRU 10A10G

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

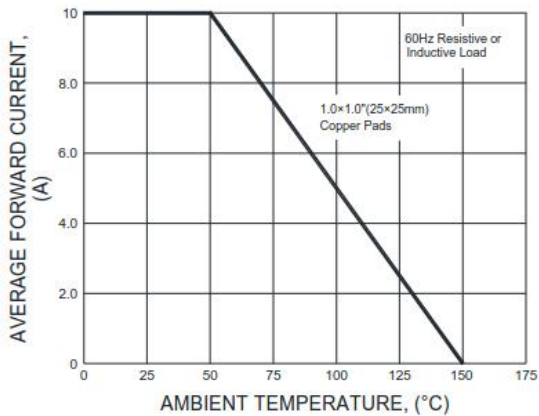


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

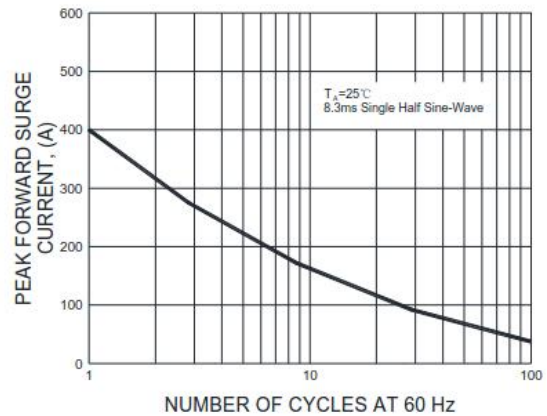


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

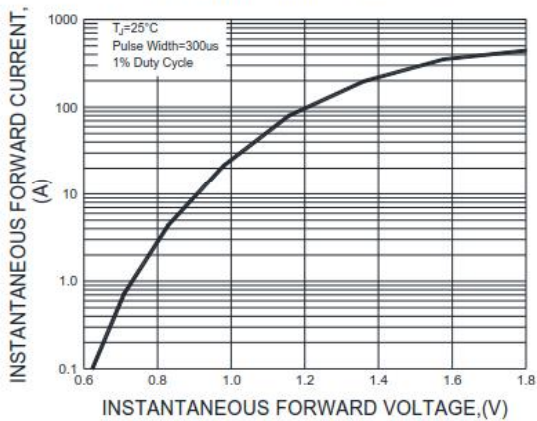


FIG.4-TYPICAL REVERSE CHARACTERISTICS


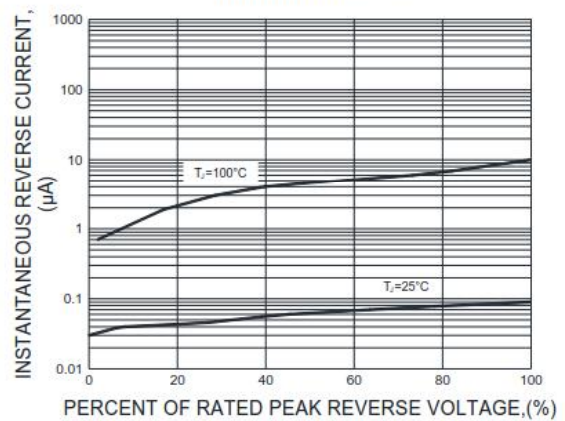


FIG.5-TYPICAL JUNCTION CAPACITANCE

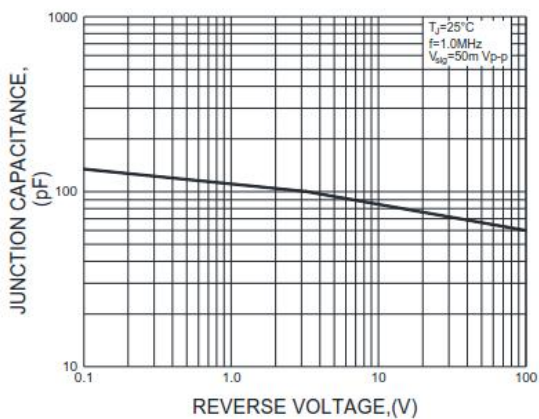

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.