

HIGH FREQUENCY MAGNETICS

T1/CEPT Dual Line Interface Transformers

TM00131

- Pick and place compatible
- Small form factor to minimize board space
- Low height profile
- Minimum interwinding breakdown voltage of 1500 Vrms
- Reference data sheet TM9905 for additional dual surface mount transformers


ELECTRICAL SPECIFICATIONS at 25° C

Part Number	Turns Ratio ±5%		Primary Inductance mH min	Leakage Inductance μH max		Interwinding Capacitance pF max	DCR Ω max			
	Coil A	Coil B	Coil A & B	Coil A	Coil B	Coil A & B	Pri		Sec	
							Coil A	Coil B	Coil A	Coil B
S553-3855-02	1 : 1.15 CT	1 CT : 2 CT	1.2	0.6	0.8	30	0.70	0.70	0.70	1.00
S553-6500-36	1 CT : 1.4 CT	1 CT : 1.4 CT	1.2	0.6	0.6	30	0.35	0.35	0.45	0.45
S553-6500-39	1 CT : 2 CT	1 : 1.36 CT	1.2	0.6	0.6	30	0.35	0.70	0.70	0.40
S553-6500-41	1 CT : 1.15 CT	1 CT : 1.15 CT*	1.2	0.6	0.6	30	0.35	0.35	0.45	0.45
S553-6500-42	1 : 1.414 / 1 : 1.75	1 : 1.414	2.0	0.8	0.8	50	1.0	1.0	1.2	1.2
S553-6500-45	1CT : 2.42CT	1CT : 2.42CT	1.2	0.6	0.6	40	0.70	0.70	1.0	1.0


* (-41) primary pins for Coil B are pins (6 - 8)

SCHEMATICS


S553-3855-02

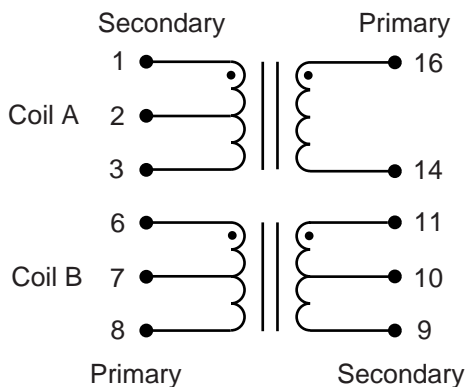

S553-6500-36
S553-6500-41

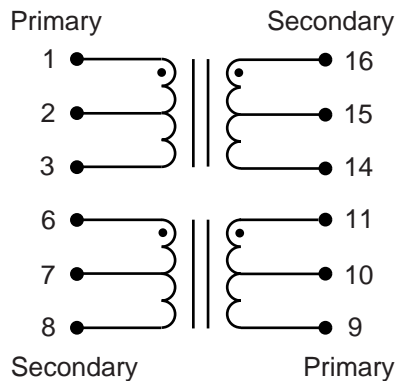


S553-6500-39

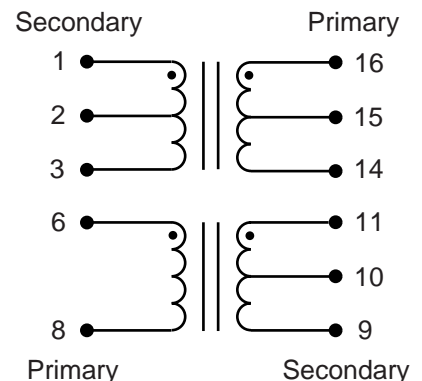


TM00131

SCHEMATICS

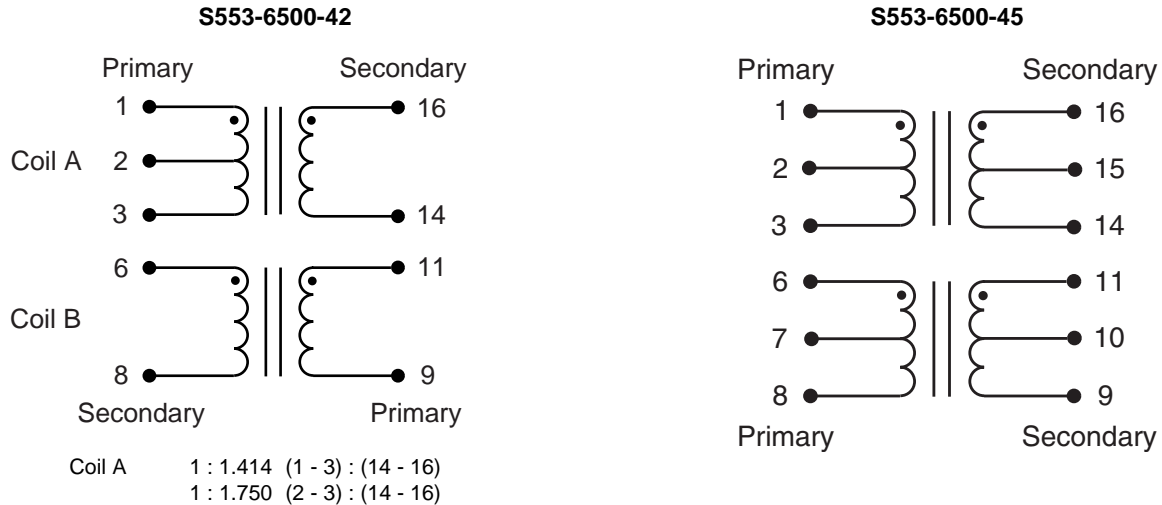


MECHANICAL

S553-3855-02
S553-6500-36
S553-6500-39
S553-6500-41
S553-6500-42
S553-6500-45

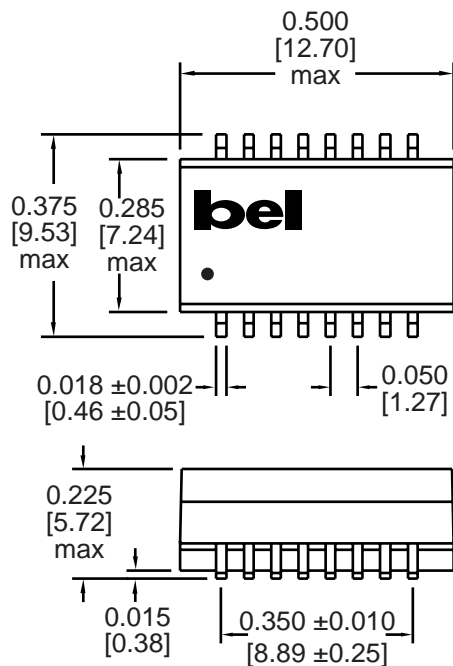

Suggested PCB Pad Layout

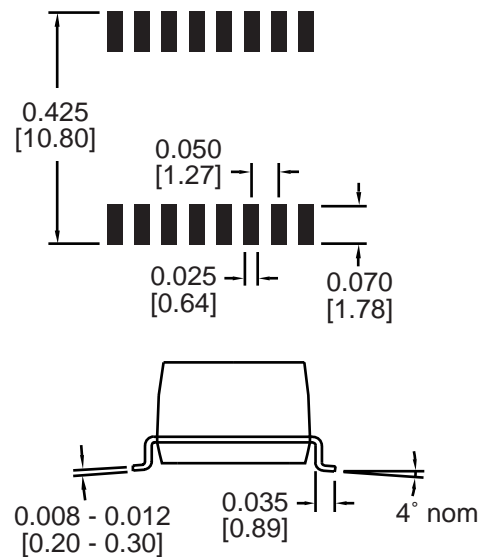

Dimensions are in inches [millimeters].
Standard dimension tolerance is ±0.010 [0.25] unless otherwise noted.

©2004 Bel Fuse Inc. Specifications subject to change without notice. 09.04

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com