


# TA8402F

## 3 PHASE HALL MOTOR DRIVER.

TA8402F is output current detect voltage drive type 3 phase unipolar hall motor driver. Bipolar drive also available with additional transistors.

- . 3 Phase Unipolar Hall Motor Driver and Also Available Bipolar Drivers with Additional Transistors.
- . Build in Control Amplifier.
- . Build in Regulator for Hall Sensors.
- . Output Current Up to 1.0A Max.(AVE).
- . Wide Range of Operating Voltage  
:  $V_{CC\text{ opr}}=4.0\sim 15V$ ,  $V_S\text{ opr}=0\sim 15V$
- . Build in Thermal Shut Down Circuit.

Unit in mm

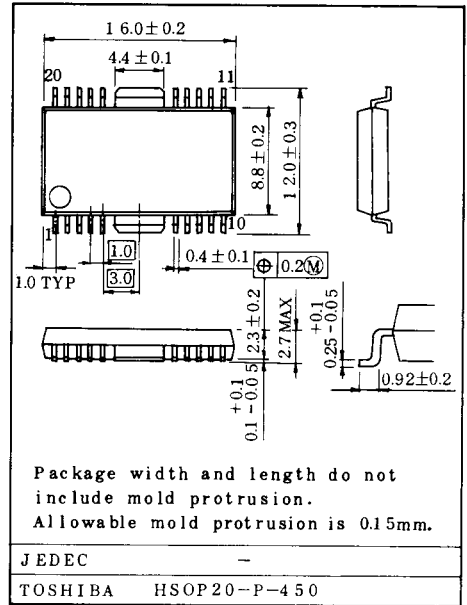

## MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage (Control)	$V_{CC}$	18	V
Supply Voltage (Motor)	$V_S$	18	V
Output Current	$I_a, I_b, I_c$	1.0	A
	$I_{\ell a}, I_{\ell b}, I_{\ell c}$	30	mA
	Regulator (for Hall Sensor)	$I_H$	15
Power Dissipation	$P_D$	1.0 3.2 <sup>Note 1</sup>	W
Operating Temperature	$T_{opr}$	-30~75	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55~150	$^\circ\text{C}$

Note 1. This rating is obtained by  $50 \times 50 \times 1\text{mm}$  Fe board mounting.

# TA8402F

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta=25°C, VCC=5V)

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current		ICC1		Stop Mode, Output Open, No Hall Bias	-	1	3	mA
		ICC2		FWD/REV Mode, Output Open, Hall Bias 1.5V	-	12.5	20	mA
Output Saturation Voltage		VSAT1		I <sub>O</sub> =0.1A	-	0.1	0.2	V
		VSAT2		I <sub>O</sub> =1.0A	-	0.8	1.4	
		VSAT3		I <sub>O</sub> =0.5A	-	0.4	-	
Saturation Voltage Differential		ΔVSAT		I <sub>O</sub> =0.1A	-	10	50	mV
Regulator (10 PIN)	Output Voltage	V <sub>OH</sub>		I <sub>H</sub> =3mA	2.90	3.05	3.20	V
	Load Regulation	Reg(V <sub>OH</sub> )		I <sub>H</sub> =3~15mA	-	2	10	mV/mA
	Temperature Coefficient	T <sub>CVH</sub>		Ta=0~75°C	-	6	-	mV/°C
Position Sensing Input	Hysteresis	V <sub>HYS</sub>			-	2	-	mV
	Offset	V <sub>H(OFF)</sub>			-5	0	5	mV
	Operating Voltage Range	CMR(V <sub>H</sub> )			0.2	-	3	V
Rotation Control Input (17 PIN)	FWD	Operating Voltage	V <sub>FWD</sub>		3.9	-	V <sub>CC</sub>	V
		Input Current	I <sub>FWD</sub>	V <sub>FWD</sub> =5V, Sink Mode	-	1.5	2.0	mA
	STOP	Operating Voltage	V <sub>STP</sub>		2.1	2.5	2.8	V
	REV	Operating Voltage	V <sub>REV</sub>		0	-	0.9	V
		Input Current	I <sub>REV</sub>	V <sub>REV</sub> =0, Source Mode	-	0.4	0.6	mA
ET Amp (8 PIN)	Operating Voltage Range	CMR(ET)			1.5	2.5	3.5	V
	Gain	G <sub>ET</sub>		⑦⑧ PIN → ⑥ PIN, V <sub>7</sub> =1.5V, V <sub>8</sub> =2.5V	-	0	-	dB
CS Input (5 PIN)	Gain	G <sub>CS</sub>		⑤ PIN → ⑥ PIN, V <sub>CS</sub> =0~1.5mV	30	33	36	dB
	Limiting Voltage	V <sub>CS(lim)</sub>			0.40	0.55	0.70	V
	Limiting Voltage Temperature Coefficient	T <sub>C(Vlim)</sub>			-	0.6	-	mV/°C
Diode Forward Drop		V <sub>F</sub>		I <sub>F</sub> =0.7A	-	1.3	-	V
Thermal Shut Down Operating Temperature		T <sub>TSD</sub>			150	160	-	°C


## TRUTH TABLE

FWD/REV INPUT (17 PIN)	POSITION SENSING INPUT			OUTPUT					
	Ha	Hb	Hc	La (4 PIN)	Lb (3 PIN)	Lc (1 PIN)	la (20 PIN)	lb (19 PIN)	lc (18 PIN)
REV $V_{17}=0$  (Note 2)	H	L	H	OFF	ON	OFF	OFF	OFF	ON
	H	L	L	OFF	ON	OFF	ON	OFF	OFF
	H	H	L	OFF	OFF	ON	ON	OFF	OFF
	L	H	L	OFF	OFF	ON	OFF	ON	OFF
	L	H	H	ON	OFF	OFF	OFF	ON	OFF
FWD $V_{17}=5V$  (Note 3)	L	L	H	ON	OFF	OFF	OFF	OFF	ON
	H	L	H	OFF	OFF	ON	OFF	ON	OFF
	H	L	L	ON	OFF	OFF	OFF	ON	OFF
	H	H	L	ON	OFF	OFF	OFF	OFF	ON
	L	H	L	OFF	ON	OFF	OFF	OFF	ON
STOP $V_{17}=2.5V$  (Note 4)	L	H	H	OFF	ON	OFF	ON	OFF	OFF
	L	L	H	OFF	OFF	ON	ON	OFF	OFF
	H	L	H	OFF					
	H	L	L						
	H	H	L						
L	H	L							
L	H	H							
L	L	H	OFF						
L	L	L							
L	H	L							
L	H	H							
L	L	H							


Note 2. This condition is obtained with 17 PIN grounded.

Note 3. This condition is obtained with 17 PIN open.

Note 4. This condition is obtained with 17 PIN ground through 16kΩ resistor.

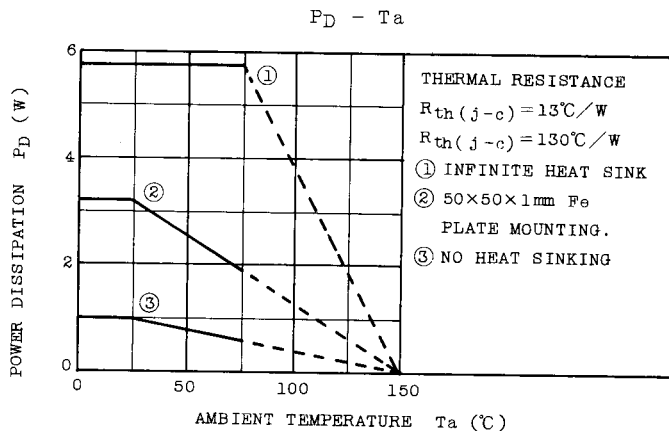

BLOCK DIAGRAM AND BASIC APPLICATION CIRCUIT

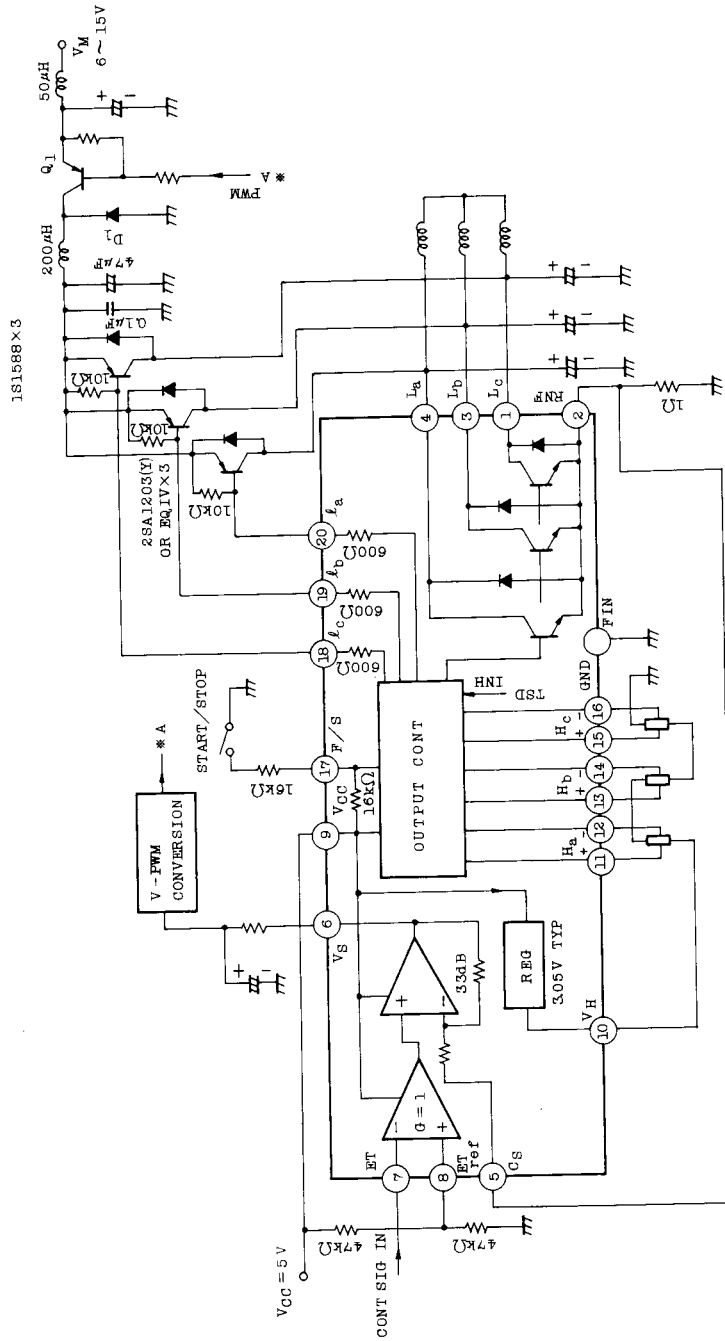



# TA8402F


## MEASURING METHOD

CHARAC- TERISTIC	SWITCH						MEASURING METHOD	METER
	1	2	3	4	5	6		
I <sub>CC1</sub>	b	b	b	b	OFF	b	V <sub>FRS</sub> =2.5V	I <sub>CC</sub>
I <sub>CC2</sub>	a	a	a			b	All position sensing inputs are all shorted and V <sub>FRS</sub> =5V	I <sub>CC</sub>
V <sub>SAT1</sub> V <sub>SAT2</sub> ΔV <sub>SAT</sub>	Refer to truth table					c a c	. I <sub>O</sub> calibration is required with V <sub>M</sub> . . Measure each output to GND voltage. . ΔV <sub>SAT</sub> is the maximum differential voltage between the highest V <sub>SAT</sub> value and lowest one.	Measure each output to ground voltage
V <sub>OH</sub> R <sub>g</sub>	b	b	b	a		b	I <sub>H</sub> =3mA R <sub>g</sub> is load regulation of V <sub>OH</sub> under the condition of I <sub>H</sub> =3~15mA	V <sub>H</sub>
V <sub>FWD</sub> V <sub>STP</sub> V <sub>REV</sub> I <sub>FWD</sub> I <sub>REV</sub>	Refer to truth table			b	ON	c	V <sub>FWD</sub> , V <sub>STP</sub> , V <sub>REV</sub> are threshold voltages when output change own states. I <sub>FWD</sub> , I <sub>REV</sub> are operating input current.	V <sub>FRS</sub> I <sub>FRS</sub>
GET	b	b	b	b	OFF	b	GET is a gain of ET Amp. measure V <sub>S</sub> differential under the condition of V <sub>ET</sub> =2.2~2.3V.	V <sub>S</sub>
GCS							GCS is a gain of CS Amp. Measure V <sub>S</sub> differential under the condition of V <sub>CS</sub> =0~15mV.	V <sub>S</sub>


. Diode Forward Drop

Measure voltage drops between GND and each output under specified condition (I<sub>F</sub>=0.7A).


$I_{CC} - V_{CC}$

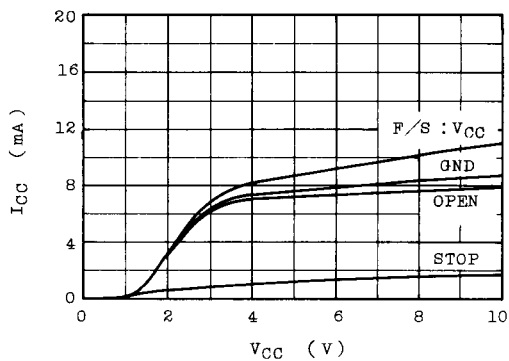


$V_S - V_{CS}$

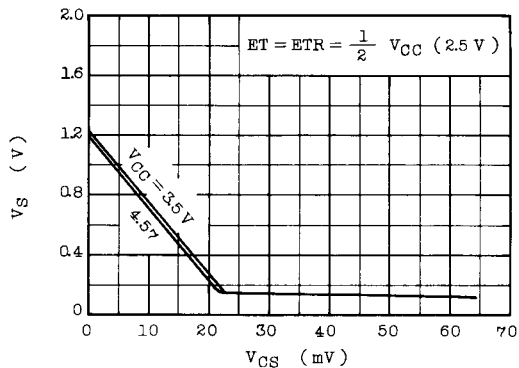


$V_S - V_{CS}$

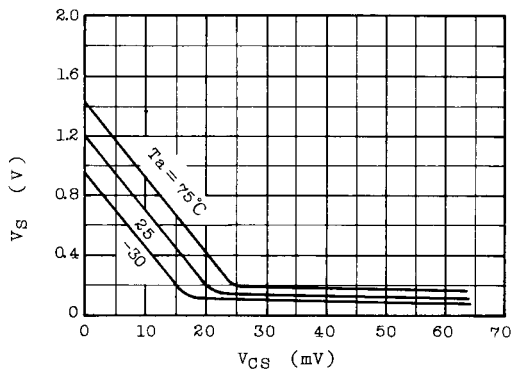


$V_{HO} - T_a$

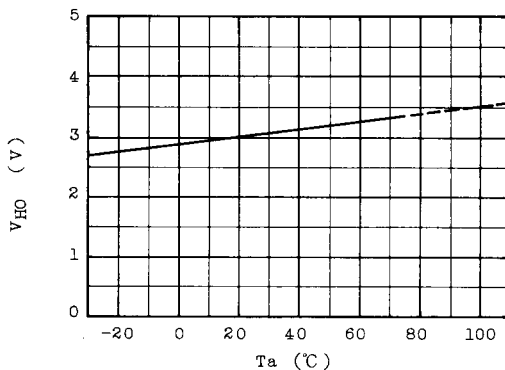

$V_{HO} - I_{HO}$

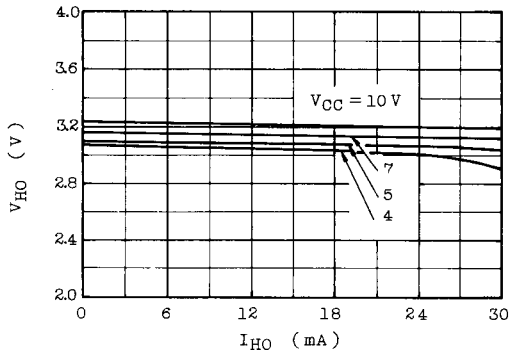


$V_{CS} - T_a$

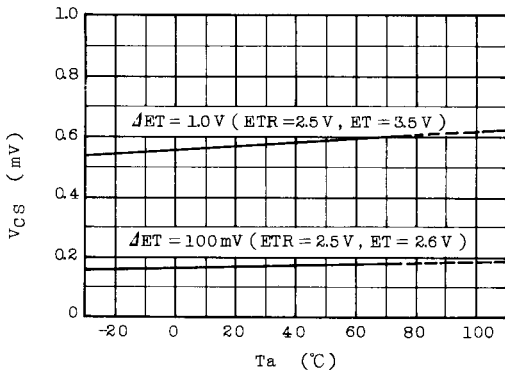


# TA8402F

$V_{CS} - \Delta V_{ETR}$

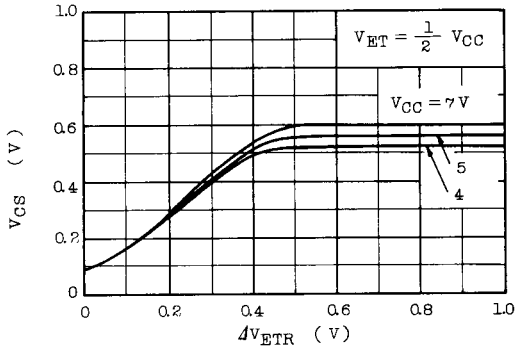

$V_S - \Delta V_{ET}$

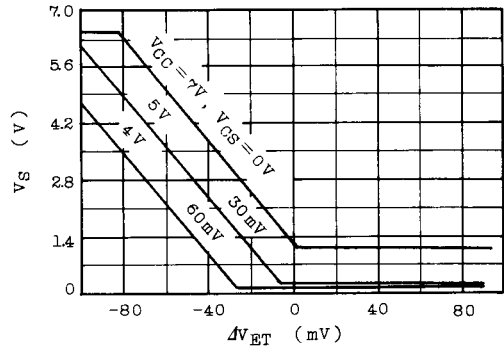

$V_{sat} - I_{out}$

