

Silicon NPN Power Transistors

TIP41/41A/41B/41C

DESCRIPTION

- With TO-220C package
- Complement to type TIP42/42A/42B/42C

APPLICATIONS

- For medium power linear switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

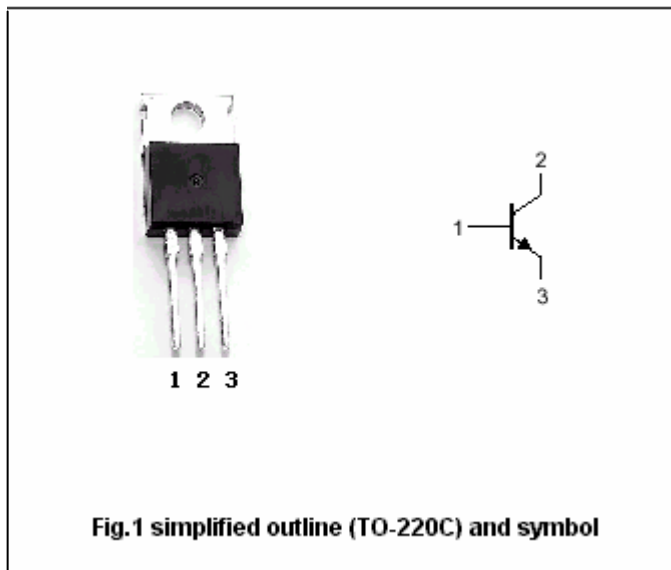


Fig.1 simplified outline (TO-220C) and symbol

Absolute maximum ratings(Tc=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	TIP41	40	V
		TIP41A	60	
		TIP41B	80	
		TIP41C	100	
V _{CEO}	Collector-emitter voltage	TIP41	40	V
		TIP41A	60	
		TIP41B	80	
		TIP41C	100	
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current (DC)		6	A
I _{CM}	Collector current-Pulse		10	A
I _B	Base current		2	A
P _C	Collector power dissipation	T _C =25	65	W
		T _a =25	2	
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-65~150	

Silicon NPN Power Transistors

TIP41/41A/41B/41C

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V _{CEQ(SUS)}	Collector-emitter sustaining voltage	TIP41	40			V	
		TIP41A	60				
		TIP41B	80				
		TIP41C	100				
V _{CEsat}	Collector-emitter saturation voltage	I _C =6A; I _B =0.6A			1.5	V	
V _{BE}	Base-emitter on voltage	I _C =6A; V _{CE} =4V			2.0	V	
I _{CES}	Collector cut-off current	TIP41	V _{CE} =40V; V _{EB} =0			0.4	mA
		TIP41A	V _{CE} =60V; V _{EB} =0				
		TIP41B	V _{CE} =80V; V _{EB} =0				
		TIP41C	V _{CE} =100V; V _{EB} =0				
I _{CEO}	Collector cut-off current	TIP41/41A	V _{CE} =30V; I _B =0			0.7	mA
		TIP41B/41C	V _{CE} =60V; I _B =0				
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			1.0	mA	
h _{FE-1}	DC current gain	I _C =0.3A; V _{CE} =4V	30				
h _{FE-2}	DC current gain	I _C =3A; V _{CE} =4V	15		75		
f _T	Transiton frequency	I _C =0.5A; V _{CE} =10V	3			MHz	

Silicon NPN Power Transistors

TIP41/41A/41B/41C

PACKAGE OUTLINE

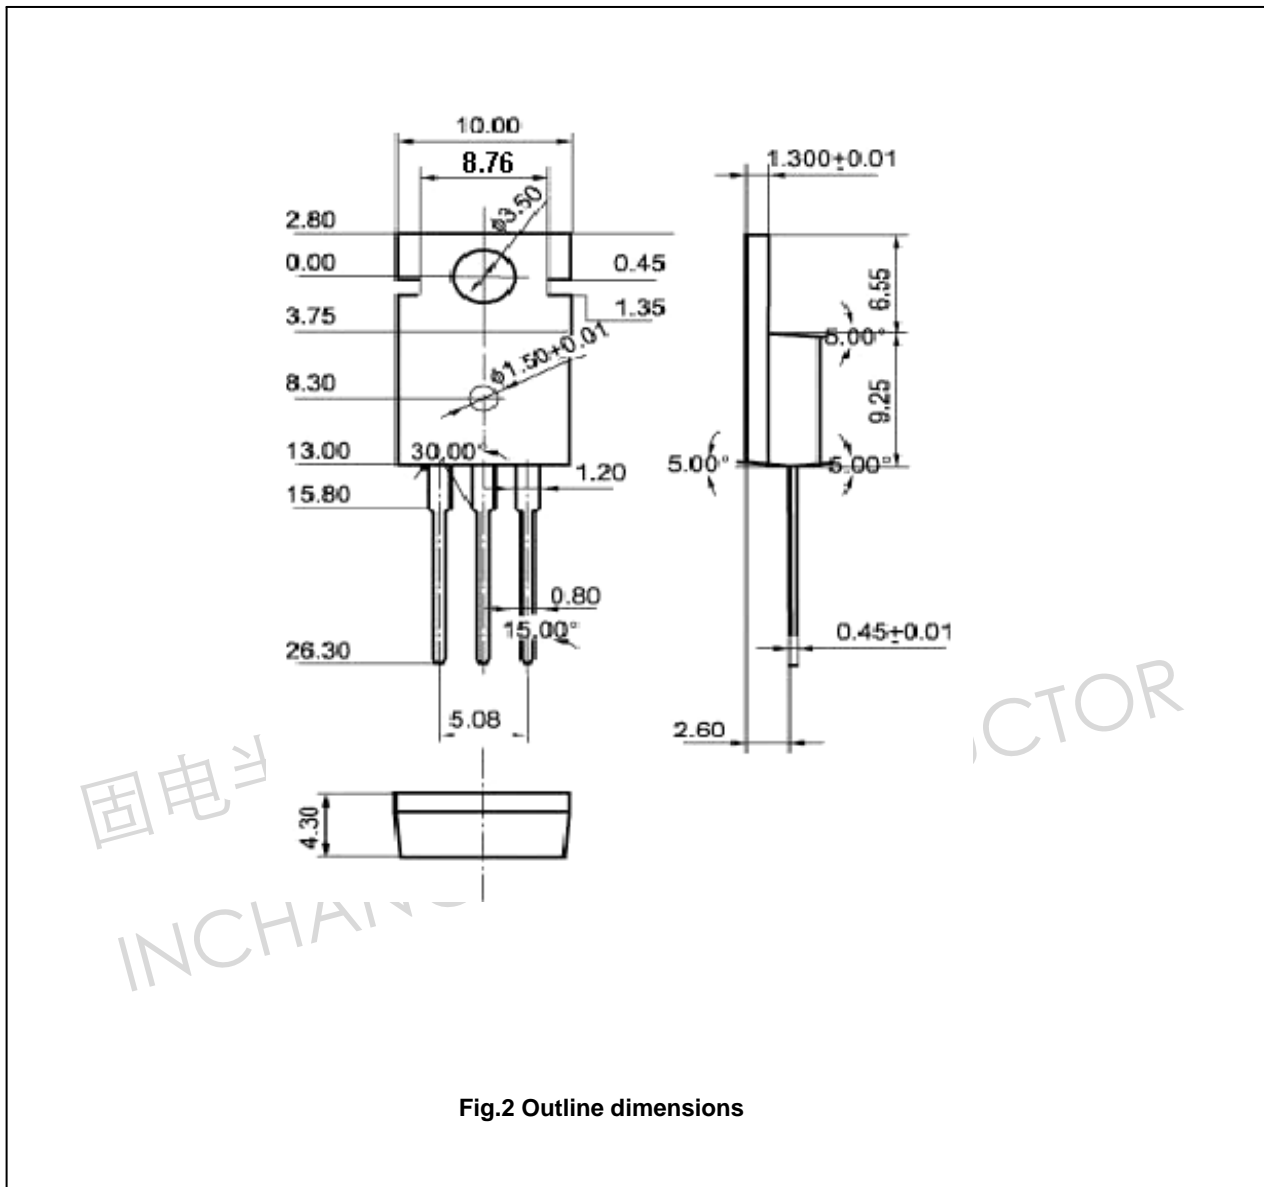


Fig.2 Outline dimensions

Silicon NPN Power Transistors

TIP41/41A/41B/41C

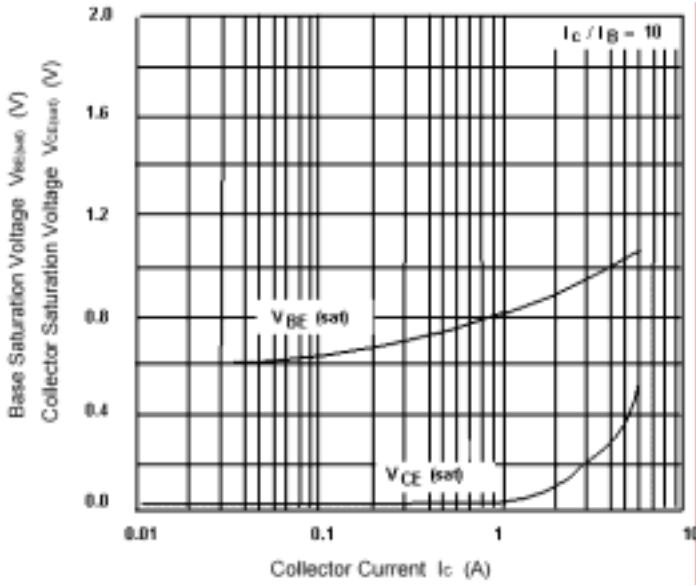


Fig.3 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

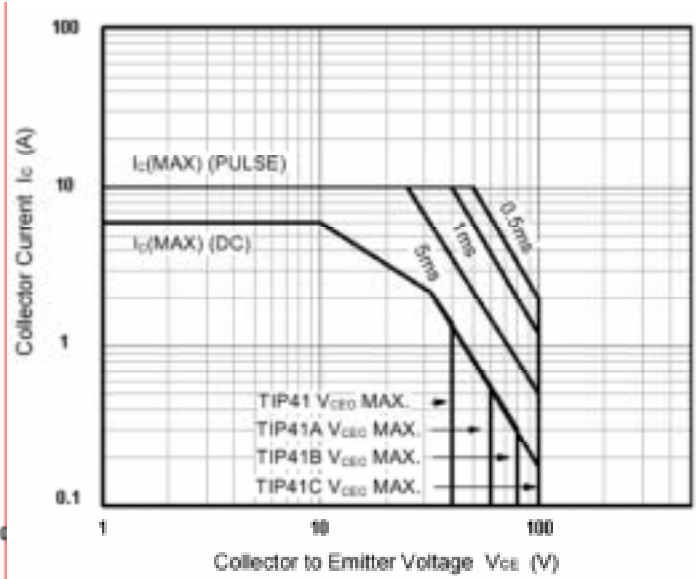


Fig.4 Safe Operating Area

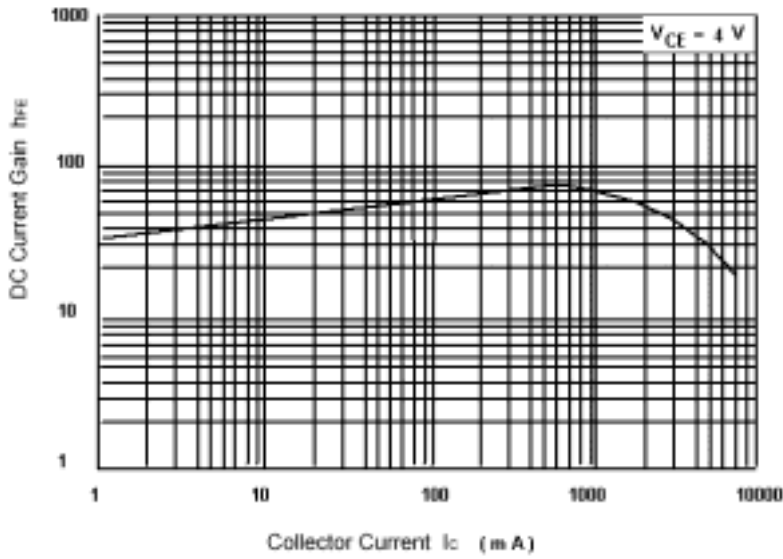


Fig.5 DC current Gain