

The RF Line
Gallium Arsenide
CATV Amplifier Module

MHW9186A


Features

- Specified for 79-, 112- and 132-Channel Loading
- Excellent Distortion Performance
- Built-in Input Diode Protection
- GaAs FET Transistor Technology
- Unconditionally Stable Under All Load Conditions
- Improved Ruggedness

870 MHz
18.5 dB GAIN
132- CHANNEL
GaAs CATV AMPLIFIER

Applications

- CATV Systems Operating in the 40 to 870 MHz Frequency Range
- Input Stage Amplifier in Optical Nodes, Line Extenders and Trunk Distribution Amplifiers for CATV Systems
- Output Stage Amplifier on Applications Requiring Low Power Dissipation and High Output Performance
- Driver Amplifier in Linear General Purpose Applications



CASE 1302-01, STYLE 1

Description

- 24 Vdc Supply, 40 to 870 MHz, CATV GaAs Forward Amplifier

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+65	dBmV
DC Supply Voltage	V_{CC}	+26	Vdc
Operating Case Temperature Range	T_C	-20 to +100	°C
Storage Temperature Range	T_{stg}	-40 to +100	°C

ESD MAXIMUM RATINGS

Rating	Input Value	Output Value	Unit
Surge Voltage per IEC 1000-4-5	300	300	V
Human Body Model per Mil. Std. 1686	2	2	kV

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24$ Vdc, $T_C = +30^\circ\text{C}$, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	40	—	870	MHz
Power Gain 870 MHz	G_p	18	18.5	19.5	dB
Slope 40-870 MHz	S	0.1	0.6	1.2	dB
Gain Flatness (40-870 MHz, Peak-to-Valley)	G_F	—	0.3	0.8	dB
Return Loss — Input ($Z_o = 75$ Ohms)	IRL	20 19 18	— — —	— — —	dB
Return Loss — Output ($Z_o = 75$ Ohms)	ORL	20 19 18	— — —	— — —	dB

Freescale Semiconductor, Inc.

Freescale Semiconductor, Inc.

ELECTRICAL CHARACTERISTICS - continued ($V_{CC} = 24 \text{ Vdc}$, $T_C = +30^\circ\text{C}$, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
Composite Second Order ($V_{out} = +44 \text{ dBmV/ch.}$, Worst Case) 132-Channel FLAT ($V_{out} = +46 \text{ dBmV/ch.}$, Worst Case) 112-Channel FLAT ($V_{out} = +48 \text{ dBmV/ch.}$, Worst Case) 79-Channel FLAT	CSO ₁₃₂ CSO ₁₁₂ CSO ₇₉	— — —	-67 -65 -72	-60 -61 -64	dBc	
Cross Modulation Distortion @ Ch 2 ($V_{out} = +44 \text{ dBmV/ch.}$, FM = 55 MHz) 132-Channel FLAT ($V_{out} = +46 \text{ dBmV/ch.}$, FM = 55 MHz) 112-Channel FLAT ($V_{out} = +48 \text{ dBmV/ch.}$, FM = 55 MHz) 79-Channel FLAT	XMD ₁₃₂ XMD ₁₁₂ XMD ₇₉	— — —	-58 -58 -58	-52 -52 -52	dBc	
Composite Triple Beat ($V_{out} = +44 \text{ dBmV/ch.}$, Worst Case) 132-Channel FLAT ($V_{out} = +46 \text{ dBmV/ch.}$, Worst Case) 112-Channel FLAT ($V_{out} = +48 \text{ dBmV/ch.}$, Worst Case) 79-Channel FLAT	CTB ₁₃₂ CTB ₁₁₂ CTB ₇₉	— — —	-62 -61 -64	-58 -58 -60	dBc	
Noise Figure 50 MHz 870 MHz	NF	— —	4.6 3.7	6.0 6.0	dB	
DC Current ($V_{DC} = 24 \text{ V}$, $T_C = -20^\circ$ to $+100^\circ\text{C}$)	I_{DC}		230	250	265	mA


Freescale Semiconductor, Inc.

Freescale Semiconductor, Inc.
NOTES

Freescale Semiconductor, Inc.


Freescale Semiconductor, Inc.

PACKAGE DIMENSIONS

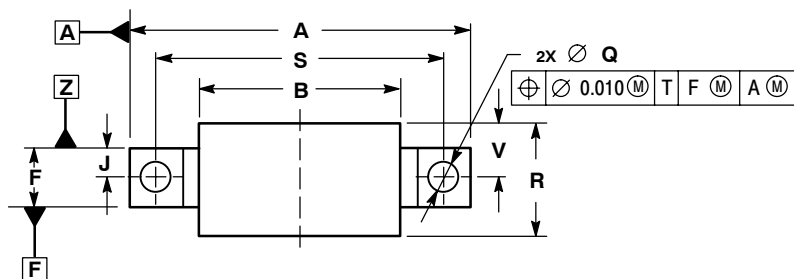

- NOTES:
 1. DIMENSIONS ARE IN INCHES.
 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	---	1.775	---	45.085
B	---	1.085	---	27.559
C	---	0.840	---	21.336
D	0.015	0.021	0.381	0.533
E	0.465	0.510	11.811	12.954
F	0.300	0.325	7.62	8.255
G	0.100 BSC		2.540 BSC	
J	0.156 BSC		3.962 BSC	
K	0.315	0.355	8.001	9.017
L	1.000 BSC		25.400 BSC	
N	0.165 BSC		4.191 BSC	
P	0.100 BSC		2.540 BSC	
Q	0.148	0.168	3.759	4.267
R	---	0.600	---	15.24
S	1.500 BSC		38.100 BSC	
U	0.200 BSC		5.080 BSC	
V	---	0.250	---	6.350
W	0.435	---	11.049	---
X	0.400 BSC		10.160 BSC	
Y	0.152	0.163	3.861	4.140
Z	0.009	0.011	0.229	0.279

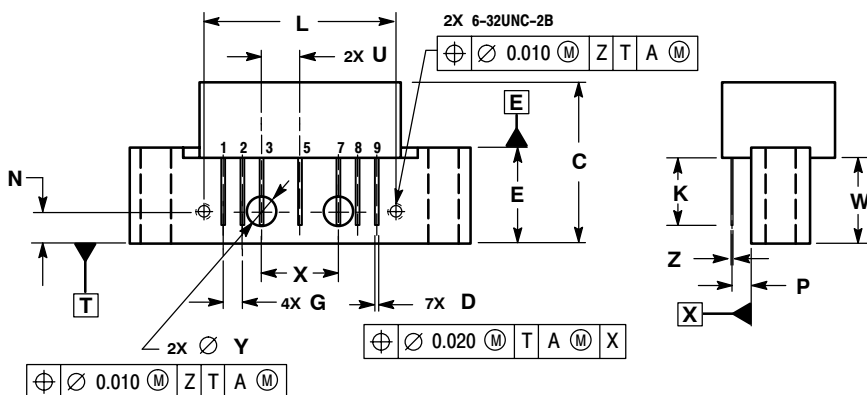

- STYLE 1:
 PIN 1. RF INPUT
 2. GROUND
 3. GROUND
 4. DELETED
 5. VDC
 6. DELETED
 7. GROUND
 8. GROUND
 9. RF OUTPUT

CASE 1302-01 ISSUE B

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

MOTOROLA and the Stylized M Logo are registered in the US Patent and Trademark Office. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola Inc. 2004

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:
 Motorola Literature Distribution
 P.O. Box 5405, Denver, Colorado 80217
 1-800-521-6274 or 480-768-2130

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
 3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573, Japan
 81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
 852-26668334

HOME PAGE: <http://www.freescale.com>



**For More Information On This Product,
Go to: www.freescale.com**

MHW9186A/D