

# Leistungsstarke IR-Lumineszenzdiode

## High Power Infrared Emitter

### SFH 4209



#### Wesentliche Merkmale

- Leistungsstarke GaAs-LED (40mW)
- Hoher Wirkungsgrad bei kleinen Strömen
- Typische Peakwellenlänge 950nm

#### Anwendungen

- Schnelle Datenübertragung mit Übertragungsraten bis 100 Mbaud (IR Tastatur, Joystick, Multimedia)
- Analoge und digitale Hi-Fi Audio- und Videosignalübertragung
- Batteriebetriebene Geräte (geringe Stromaufnahme)
- Anwendungen mit hohen Zuverlässigkeitssansprüchen bzw. erhöhten Anforderungen
- Alarm- und Sicherungssysteme
- IR Freiraumübertragung

#### Features

- High Power GaAs-LED (40mW)
- High Efficiency at low currents
- Typical peak wavelength 950nm

#### Applications

- High data transmission rate up to 100 Mbaud (IR keyboard, Joystick, Multimedia)
- Analog and digital Hi-Fi audio and video signal transmission
- Low power consumption (battery) equipment
- Suitable for professional and high-reliability applications
- Alarm and safety equipment
- IR free air transmission

Typ Type	Bestellnummer Ordering Code	Strahlstärkegruppierung <sup>1)</sup> ( $I_F = 100\text{mA}$ , $t_p = 20\text{ ms}$ ) Radiant intensity grouping <sup>1)</sup> $I_e$ (mW/sr)
SFH 4209	Q62702 P5488	24 (>6.3)

<sup>1)</sup> gemessen bei einem Raumwinkel  $\Omega = 0.01\text{ sr}$   
measured at a solid angle of  $\Omega = 0.01\text{ sr}$

**Grenzwerte ( $T_A = 25 \text{ }^\circ\text{C}$ )****Maximum Ratings**

<b>Bezeichnung Parameter</b>	<b>Symbol Symbol</b>	<b>Wert Value</b>	<b>Einheit Unit</b>
Betriebs- und Lagertemperatur Operating and storage temperature range	$T_{op}; T_{stg}$	- 40 ... + 100	$^\circ\text{C}$
Sperrspannung Reverse voltage	$V_R$	3	V
Durchlaßstrom Forward current	$I_F$ (DC)	100	mA
Stoßstrom, $t_p = 10 \mu\text{s}$ , $D = 0$ Surge current	$I_{FSM}$	2.2	A
Verlustleistung Power dissipation	$P_{tot}$	180	mW
Wärmewiderstand Sperrsicht - Umgebung bei Montage auf FR4 Platine, Padgröße je 16 mm <sup>2</sup> Thermal resistance junction - ambient mounted on PC-board (FR4), pads size 16 mm <sup>2</sup> each Wärmewiderstand Sperrsicht - Lötstelle bei Montage auf Metall-Block Thermal resistance junction - soldering point, mounted on metal block	$R_{thJA}$ $R_{thJS}$	450 200	K/W

Kennwerte ( $T_A = 25^\circ\text{C}$ )


Characteristics

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Wellenlänge der Strahlung Wavelength at peak emission $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	$\lambda_{\text{peak}}$	950	nm
Spektrale Bandbreite bei 50% von $I_{\text{max}}$ Spectral bandwidth at 50% of $I_{\text{max}}$ $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	$\Delta\lambda$	40	nm
Abstrahlwinkel Half angle	$\varphi$	$\pm 25$	Grad deg.
Aktive Chipfläche Active chip area	$A$	0.09	$\text{mm}^2$
Abmessungen der aktiven Chipfläche Dimensions of the active chip area	$L \times B$ $L \times W$	$0.3 \times 0.3$	mm
Schaltzeiten, $I_e$ von 10% auf 90% und von 90% auf 10%, bei $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}, R_L = 50 \Omega$ Switching times, $I_e$ from 10% to 90% and from 90% to 10%, $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}, R_L = 50 \Omega$	$t_r, t_f$	10	ns
Durchlaßspannung, Forward voltage $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$ $I_F = 1 \text{ A}, t_p = 100 \mu\text{s}$	$V_F$ $V_F$	1.5 ( $\leq 1.8$ ) 3.2 ( $\leq 4.3$ )	V V
Sperrstrom, Reverse current $V_R = 3 \text{ V}$	$I_R$	0.01 ( $\leq 10$ )	$\mu\text{A}$
Gesamtstrahlungsfluß, Total radiant flux $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	$\Phi_e$	40	mW
Temperaturkoeffizient von $I_e$ bzw. $\Phi_e$ , $I_F = 100 \text{ mA}$ Temperature coefficient of $I_e$ or $\Phi_e$ , $I_F = 100 \text{ mA}$	$TC_I$	-0.44	%/K
Temperaturkoeffizient von $V_F$ , $I_F = 100 \text{ mA}$ Temperature coefficient of $V_F$ , $I_F = 100 \text{ mA}$	$TC_V$	-1.5	mV/K
Temperaturkoeffizient von $\lambda$ , $I_F = 100 \text{ mA}$ Temperature coefficient of $\lambda$ , $I_F = 100 \text{ mA}$	$TC_\lambda$	+0.2	nm/K


**Strahlstärke  $I_e$  in Achsrichtung**gemessen bei einem Raumwinkel  $\Omega = 0.01 \text{ sr}$ **Radiant Intensity  $I_e$  in Axial Direction**at a solid angle of  $\Omega = 0.01 \text{ sr}$ 

<b>Bezeichnung Parameter</b>	<b>Symbol</b>	<b>Werte Values</b>	<b>Einheit Unit</b>
Strahlstärke Radiant intensity $I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	$I_{e \text{ min.}}$ $I_{e \text{ typ.}}$	6,3 24	mW/sr mW/sr
Strahlstärke Radiant intensity $I_F = 1 \text{ A}, t_p = 100 \mu\text{s}$	$I_{e \text{ typ.}}$	145	mW/sr


**Relative Spectral Emission**  
 $I_{\text{rel}} = f(\lambda)$

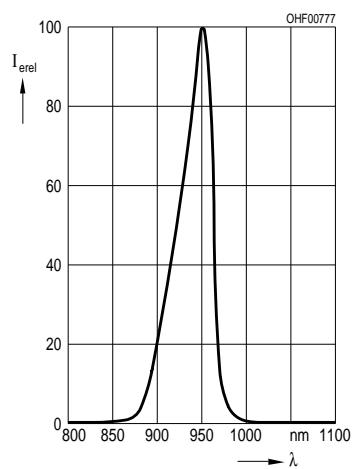


**Forward Current  $I_F = f(V_F)$**   
single pulse,  $t_p = 20 \mu\text{s}$

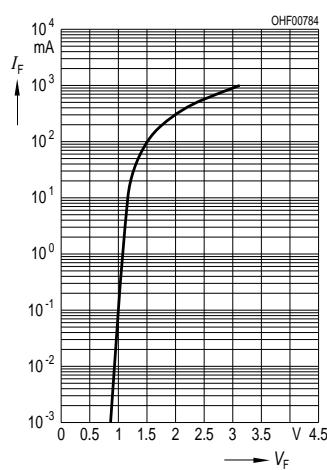


**Radiation Characteristics  $I_{\text{rel}} = f(\phi)$**

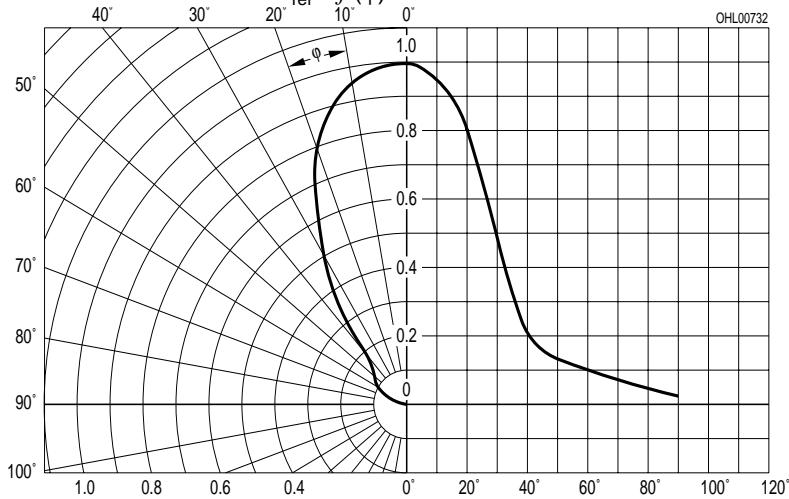


**Radiant Intensity**  $\frac{I_e}{I_e \text{ 100 mA}} = f(I_F)$   
Single pulse,  $t_p = 20 \mu\text{s}$

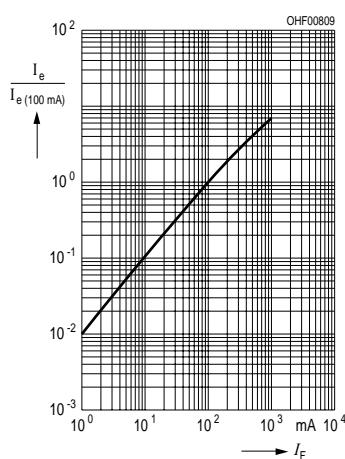

**Max. Permissible Forward Current**  
 $I_F = f(T_A), R_{\text{thJA}}^{-1}$

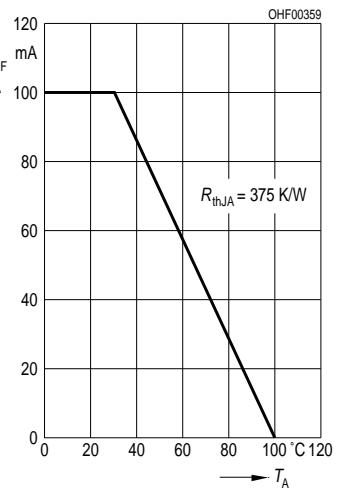


**Permissible Pulse Handling Capability**  $I_F = f(\tau), T_A = 25^\circ\text{C}$ , duty cycle  $D = \text{parameter}$

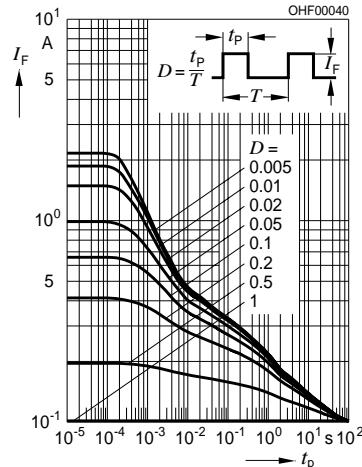

<sup>1)</sup> Thermal resistance junction - ambient mounted on PC-board (FR4), pad size 16 mm<sup>2</sup> (each).

## Maßzeichnung Package Outlines

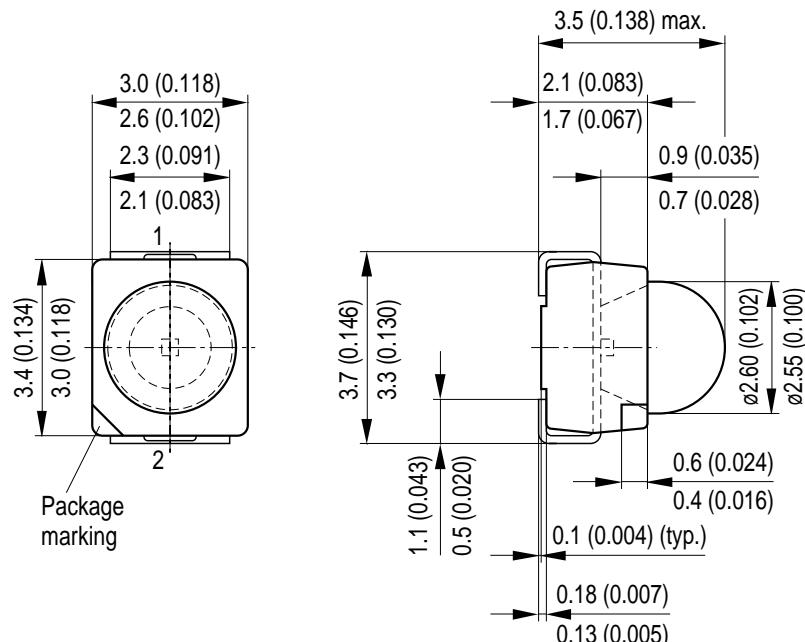

Maße in mm, wenn nicht anders angegeben / Dimensions in mm, unless otherwise specified.

Published by OSRAM Opto Semiconductors GmbH & Co. OHG  
Wernerwerkstrasse 2, D-93049 Regensburg

© All Rights Reserved.

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics.  
Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

**Components used in life-support devices or systems must be expressly authorized for such purpose!** Critical components<sup>1</sup>, may only be used in life-support devices or systems<sup>2</sup> with the express written approval of OSRAM OS.

<sup>1</sup> A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

<sup>2</sup> Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.