

8V INPUT LOW SUPPLY CURRENT VOLTAGE REGULATOR

NO.EA-038-130422

OUTLINE

The RN5RT Series are CMOS-based voltage regulator ICs with high output voltage accuracy and low supply current developed . Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, output voltage setting resistors and a current limit circuit. The output voltage of these ICs is fixed with high accuracy.

The built-in Driver Transistor of low ON Resistance permits developing of low dropout CMOS type regulator as RN5RT Series. Even if V_{OUT} is shorted to GND, the current limit circuit protects the ICs from destruction. Furthermore, these ICs have a chip enable function, so that the supply current on standby can be minimized.

Since the package for these ICs is the SOT-23-5 (Mini-mold) package, high density mounting of the ICs on boards is possible.


FEATURES

• Supply Current	Typ. 4 μ A (except I_{CEL})
• Standby Current	Typ. 0.1 μ A
• Dropout Voltage	Typ. 0.3V (I _{OUT} =60mA, RN5RT30A)
• Temperature-Drift Coefficient of Output Voltage	Typ. $\pm 100\text{ppm}/^{\circ}\text{C}$
• Line Regulation.	Typ. 0.15%/V
• Input Voltage Range	Max. 8.0V
• Output Voltage Range.....	2.0V to 6.0V (0.1V steps)
• Output Voltage Accuracy.....	$\pm 2.0\%$
• Built-in Fold Back Protection Circuit	Typ. 30mA (Current at short mode)
• Package	SOT-23-5

APPLICATION

- Power source for battery-powered equipment.
- Power source for cellular phones, cameras, VCRs, camcorders, hand-held audio instruments and hand-held communication equipment.
- Power source for domestic appliances.

BLOCK DIAGRAM

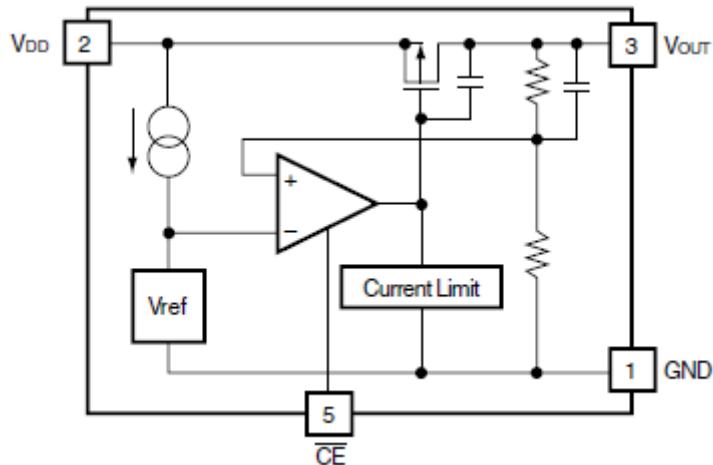


SELECTION GUIDE

The output voltage for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RN5RTxxAA-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes

xx: The output voltage can be designated in the range from 1.2V (12) to 6.0V (60) in 0.1V steps.

PIN CONFIGURATION



PIN DESCRIPTION

• SOT-23-5

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V_{DD}	Input Pin
3	V_{OUT}	Output Pin
4	NC	No Connection
5	\overline{CE}	Chip Enable Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	9	V
V_{CE}	Input Voltage (CE)	-0.3 to $V_{IN}+0.3$	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN}+0.3$	V
I_{OUT}	Output Current	150	mA
P_D	Power Dissipation* (SOT-23-5)	420	mW
T_{opt}	Operating Temperature Range	-40 to 85	°C
T_{stg}	Storage Temperature Range	-55 to 125	°C
T_{solder}	Lead Temperature (Soldering)	260°C , 10s	

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

ELECTRICAL CHARACTERISTICS

• RN5RT30A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
VOUT	Output Voltage	VIN=4.0V, IOUT=10mA	2.940	3.000	3.060	V
IOUT	Output Current	VIN=4.0V	40	60		mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=4.0V 1mA ≤ IOUT ≤ 60mA		40	80	mV
VDF	Dropout Voltage	IOUT=60mA		0.3	0.5	V
Iss	Supply Current	VIN=4.0V (except ICEL)		4.0	10	µA
Istandby	Supply Current (Standby)	VIN=VCE=4.0V		0.1	1.0	µA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8.0V	0.00	0.15	0.30	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{opt}}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	CE Input Voltage "H"		1.5			V
VCEL	CE Input Voltage "L"				0.25	V
ICEH	CE Input Current "H"	VCE=VIN		0.0	0.1	µA
ICEL	CE Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	µA

• RN5RT40A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
VOUT	Output Voltage	VIN=5.0V, IOUT=10mA	3.920	4.000	4.080	V
IOUT	Output Current	VIN=5.0V	50	80		mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=5.0V 1mA ≤ IOUT ≤ 80mA		40	80	mV
VDIF	Dropout Voltage	IOUT=80mA		0.3	0.5	V
Iss	Supply Current	VIN=5.0V (expect ICEL)		4	10	μA
Istandby	Supply Current (Standby)	VIN=VCE=5.0V		0.1	1.0	μA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8.0V		0.15	0.30	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{Opt}}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	CE Input Voltage "H"		1.5			V
VCEL	CE Input Voltage "L"				0.25	V
ICEH	CE Input Current "H"	VCE=VIN		0.0	0.1	μA
ICEL	CE Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	μA

• RN5RT50A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
VOUT	Output Voltage	VIN=6.0V, IOUT=10mA	4.900	5.000	5.100	V
IOUT	Output Current	VIN=6.0V	65	100		mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=6.0V 1mA ≤ IOUT ≤ 100mA		40	80	mV
VDIF	Dropout Voltage	IOUT=100mA		0.3	0.5	V
Iss	Supply Current	VIN=6.0V (except ICEL)		4	10	μA
Istandby	Supply Current (Standby)	VIN=VCE=6.0V		0.1	1.0	μA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8.0V		0.15	0.30	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{Opt}}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	CE Input Voltage "H"		1.5			V
VCEL	CE Input Voltage "L"				0.25	V
ICEH	CE Input Current "H"	VCE=VIN		0.0	0.1	μA
ICEL	CE Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	μA


ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

Part Number	Output Voltage			Output Current			Load Regulation			Dropout Voltage			Supply Current		
	VOUT (V)			IOUT (mA)			$\Delta V_{OUT}/\Delta I_{OUT}$ (mA)			VDIF (V)			Iss (μ A)		
	Conditions	Min.	Typ.	Max.	Conditions	Min.	Typ.	Conditions	Typ.	Max.	Conditions	Typ.	Max.	Conditions	Typ.
RN5RT20A	Vin-Vout =1.0V	1.960	2.000	2.040	Iout =10mA	25	40	Vin-Vout =1.0V 1mA < Iout ≤ 40mA	Iout =40mA	0.3	0.5	Vin-Vout =1.0V (except ICEL)	4.0	10	
RN5RT21A		2.058	2.100	2.142											
RN5RT22A		2.156	2.200	2.244											
RN5RT23A		2.254	2.300	2.346											
RN5RT24A		2.352	2.400	2.448											
RN5RT25A		2.450	2.500	2.550											
RN5RT26A		2.548	2.600	2.652											
RN5RT27A		2.646	2.700	2.754											
RN5RT28A		2.744	2.800	2.856											
RN5RT29A		2.842	2.900	2.958											
RN5RT30A		2.940	3.000	3.060											
RN5RT31A		3.038	3.100	3.162											
RN5RT32A		3.136	3.200	3.264											
RN5RT33A		3.234	3.300	3.366											
RN5RT34A		3.332	3.400	3.468											
RN5RT35A		3.430	3.500	3.570											
RN5RT36A		3.528	3.600	3.672											
RN5RT37A		3.626	3.700	3.774											
RN5RT38A		3.724	3.800	3.876											
RN5RT39A		3.822	3.900	3.978	Iout =10mA	40	60	Vin-Vout =1.0V 1mA < Iout ≤ 60mA	Iout =60mA	0.3	0.5	Vin-Vout =1.0V (except ICEL)	4.0	10	
RN5RT40A		3.920	4.000	4.080											
RN5RT41A		4.018	4.100	4.182											
RN5RT42A		4.116	4.200	4.284											
RN5RT43A		4.214	4.300	4.386											
RN5RT44A		4.312	4.400	4.488											
RN5RT45A		4.410	4.500	4.590											
RN5RT46A		4.508	4.600	4.692											
RN5RT47A		4.606	4.700	4.794											
RN5RT48A		4.704	4.800	4.896											
RN5RT49A		4.802	4.900	4.998											
RN5RT50A		4.900	5.000	5.100	Iout =10mA	50	80	Vin-Vout =1.0V 1mA < Iout ≤ 80mA	Iout =80mA	0.3	0.5	Vin-Vout =1.0V (except ICEL)	4.0	10	
RN5RT51A		4.998	5.100	5.202											
RN5RT52A		5.096	5.200	5.304											
RN5RT53A		5.194	5.300	5.406											
RN5RT54A		5.292	5.400	5.508											
RN5RT55A		5.390	5.500	5.610											
RN5RT56A		5.488	5.600	5.712											
RN5RT57A		5.586	5.700	5.814											
RN5RT58A		5.684	5.800	5.916											
RN5RT59A		5.782	5.900	6.018											
RN5RT60A		5.880	6.000	6.120											

Topt=25°C

Supply Current (Standby)			Line Regulation			Input Voltage	Output Voltage Temperature Coefficient	Short Current Limit		CE Input Voltage		CE Input Current							
										"H"	"L"	"H"			"L"				
Istandby (µA)			ΔVout/ΔVIN (%/V)			VIN (V)	ΔVout/ΔT (ppm/°C)	Ilim (mA)		VCEH (V)	VCEL (V)	ICEH (µA)			ICEL (µA)				
Conditions	Typ.	Max.	Conditions	Typ.	Max.	Max.	Conditions	Typ.	Conditions	Typ.	Min.	Max.	Conditions	Typ.	Max.	Conditions	Min.	Typ.	Max.
Vin-Vout =1.0V	0.1	1.0	IOUT= 30mA VOUT+ 0.5V ≤VIN ≤8V	0.15	0.3	8	IOUT= 10mA -40°C ≤Topt ≤85°C	±100	VOUT =0V	30	1.5	0.25	VCE= Vin	0	0.1	VCE= 0V	-4.0	-2.0	-0.1




OPERATION

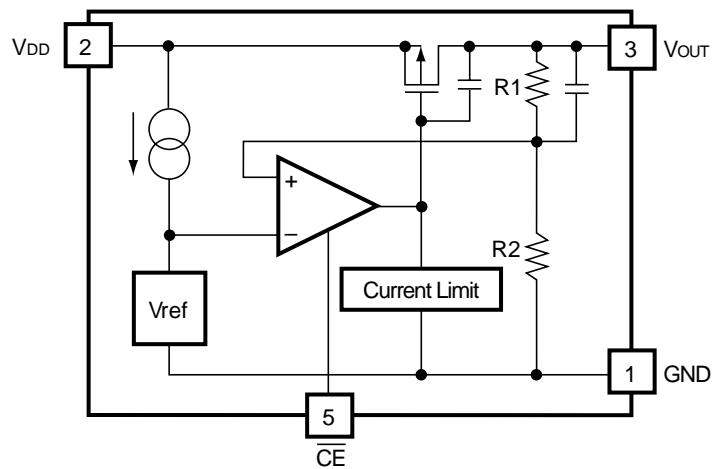

In these ICs, the output voltage **VOUT** is detected by feed-back registers **R1**, **R2**, and the detected output voltage is compared with a reference voltage by the error amplifier, so that a constant voltage is output.




A current limit circuit working for short protection and a chip enable circuit for standby function are included.

TEST CIRCUITS

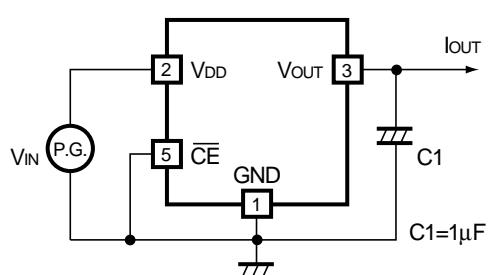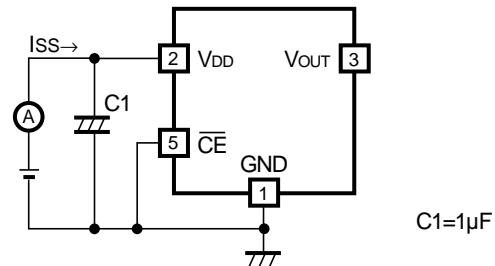
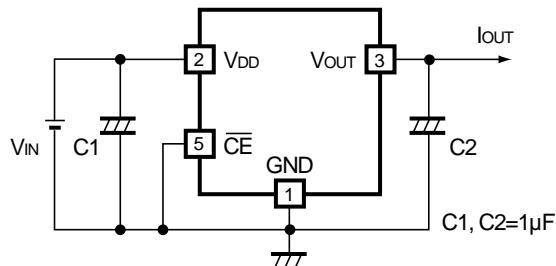






TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current

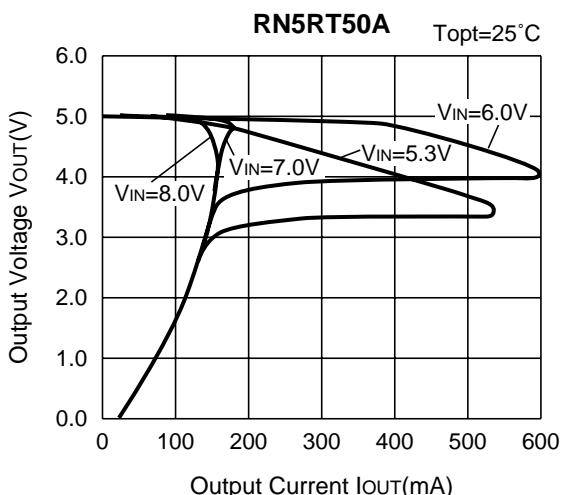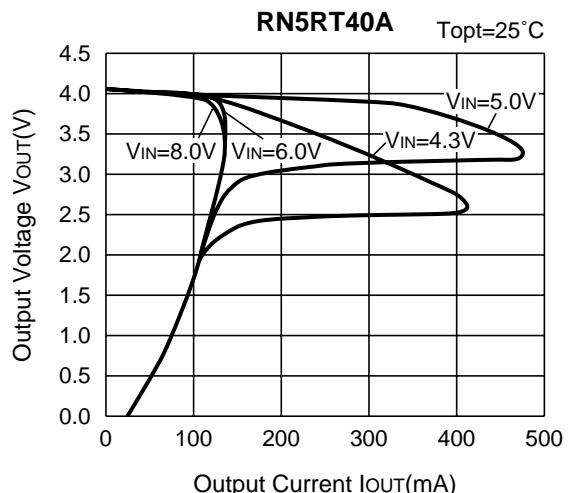
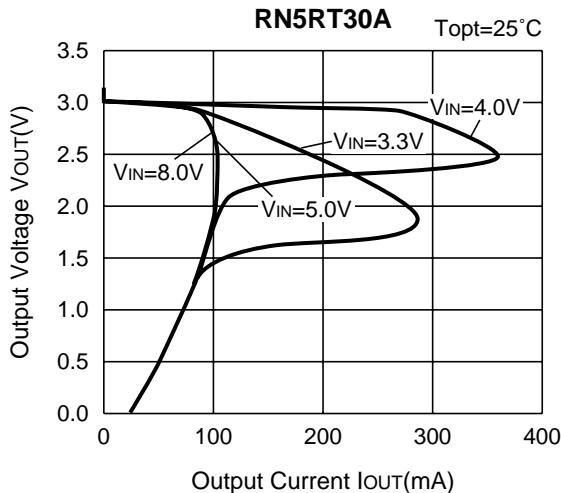



2) Output Voltage vs. Input Voltage

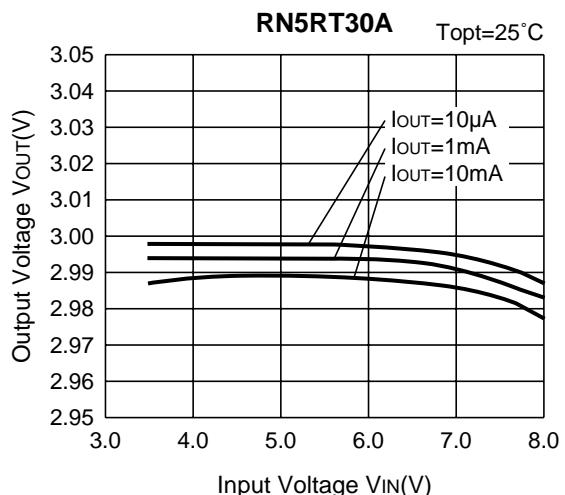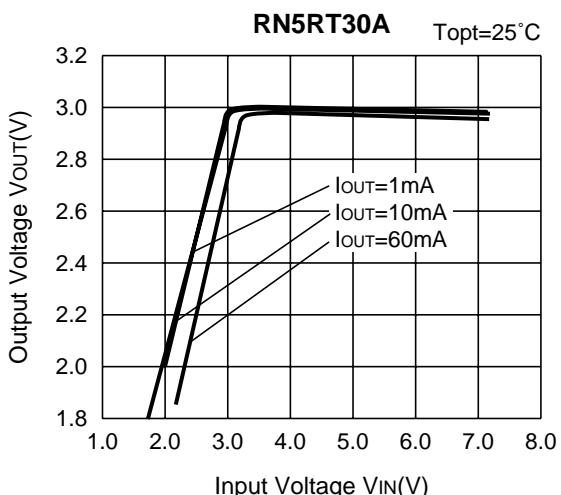

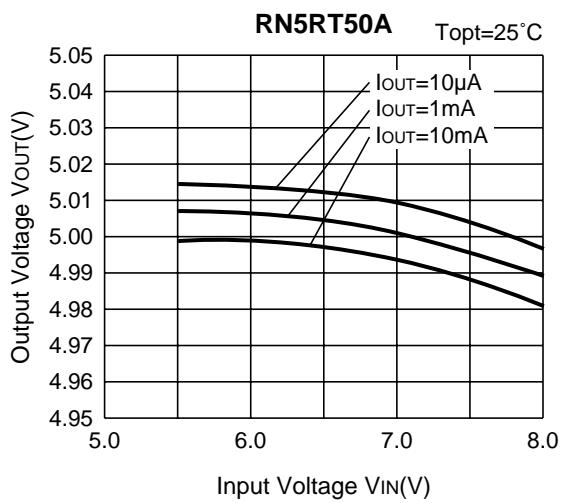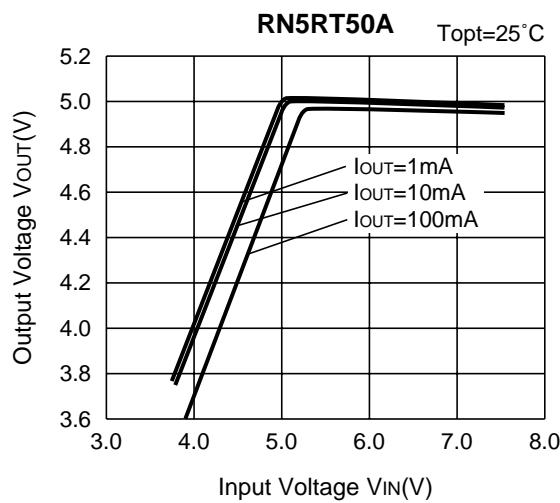
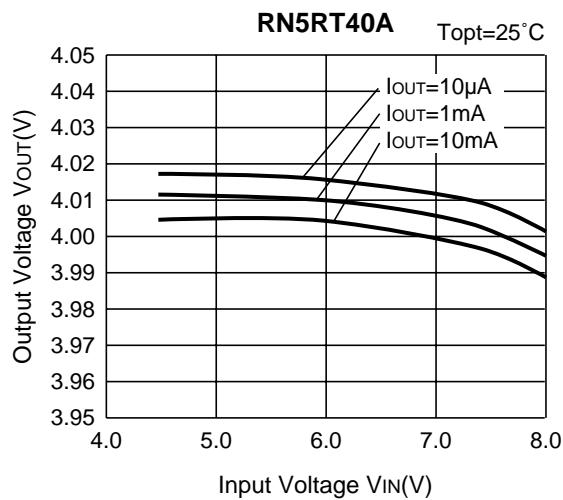
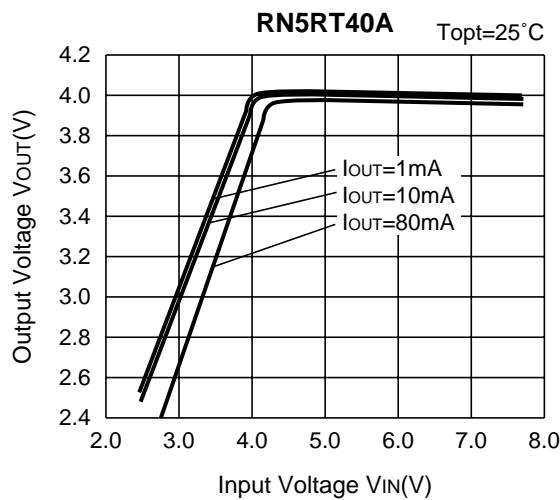




3) Dropout Voltage vs. Output Current

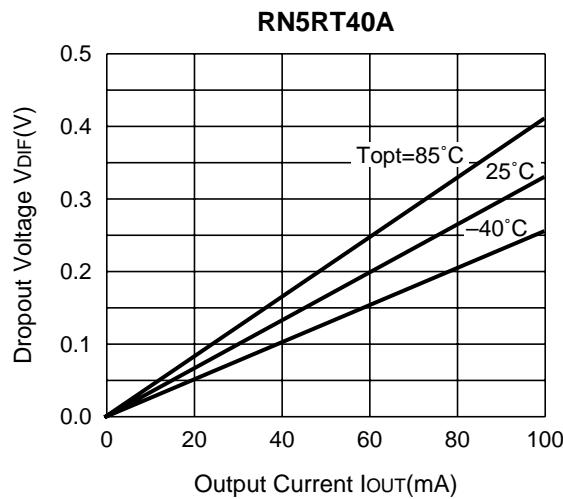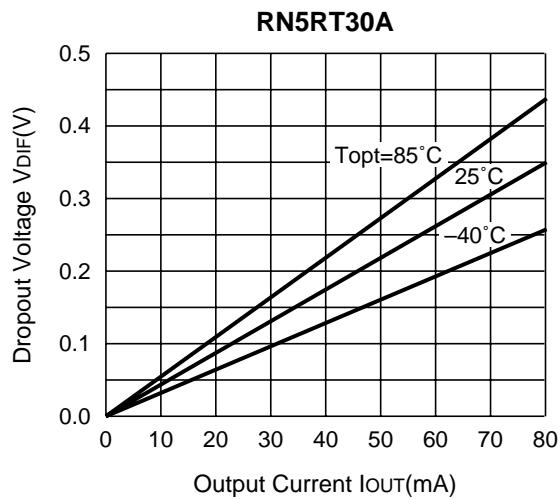


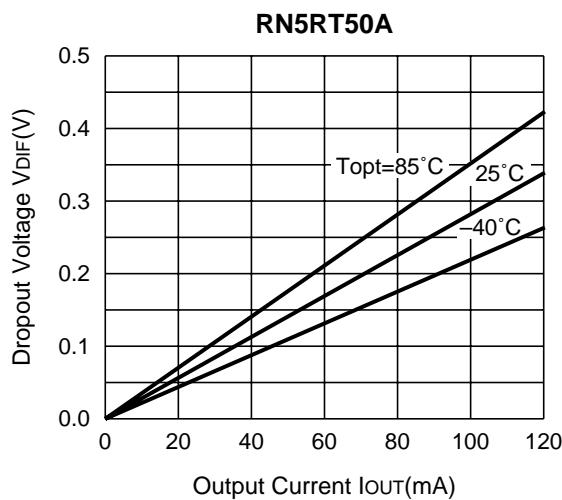


4) Output Voltage vs. Temperature

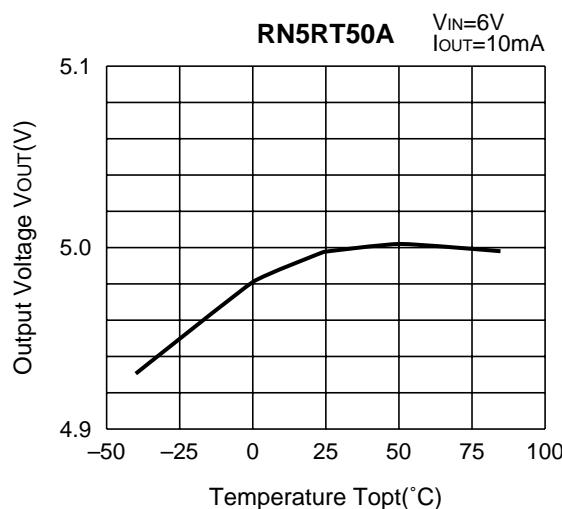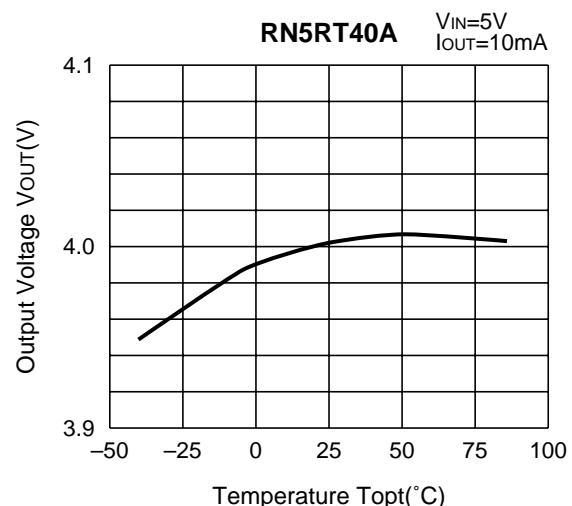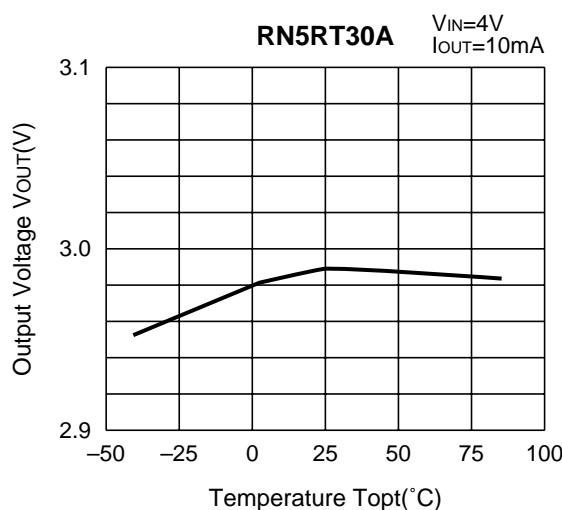

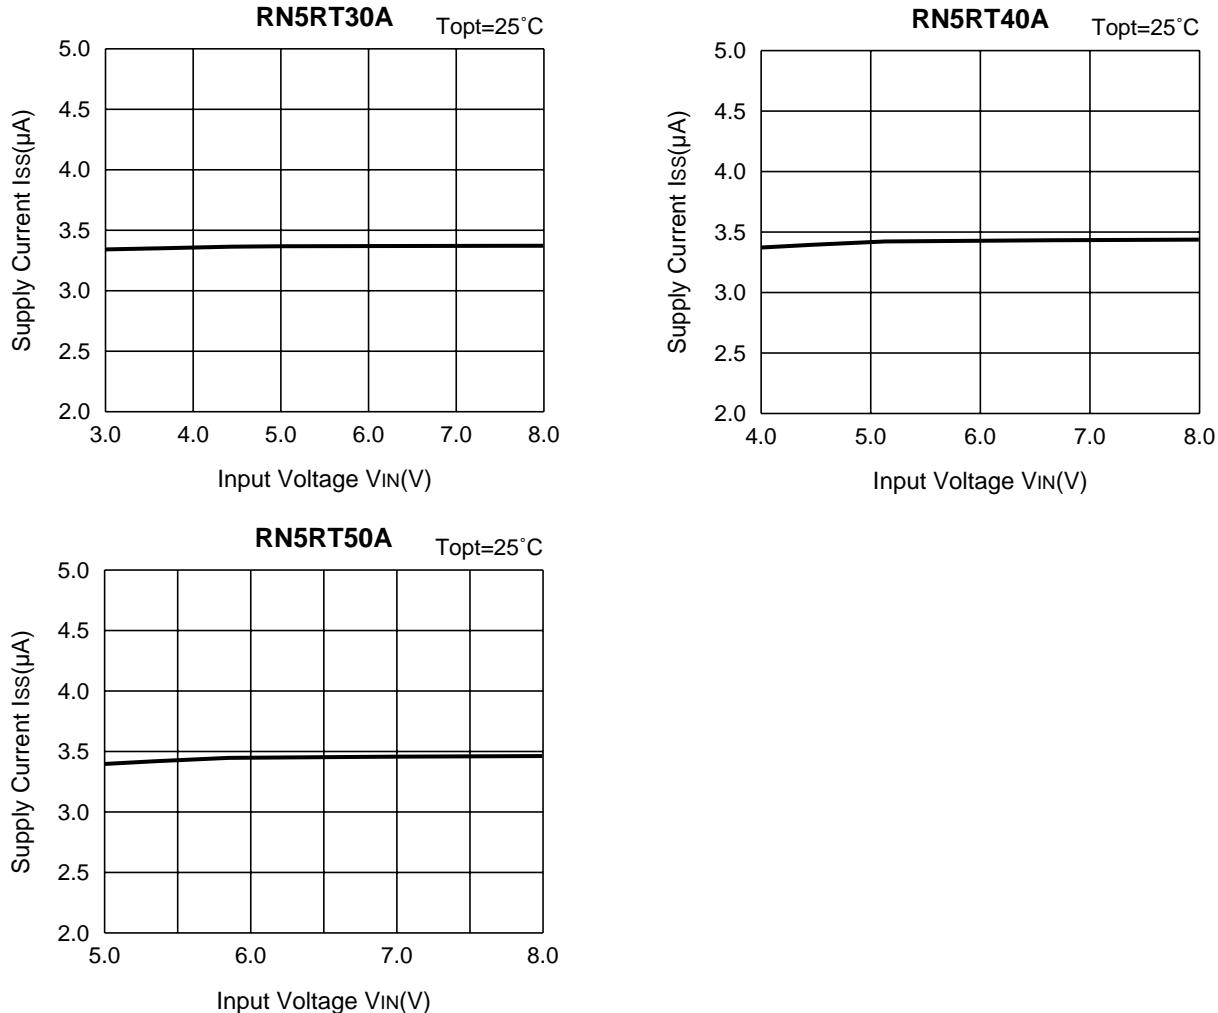
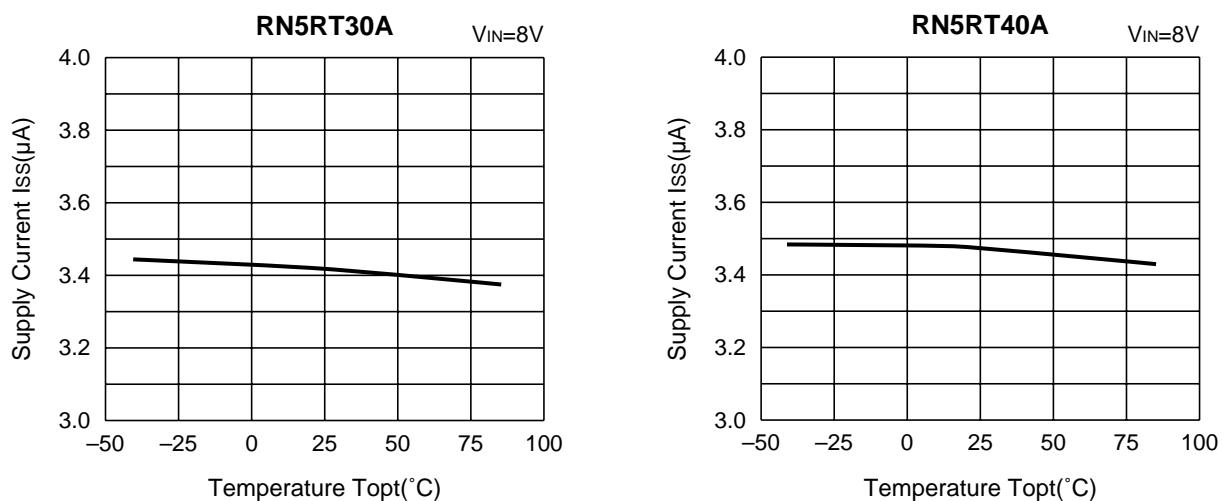
5) Supply Current vs. Input Voltage**6) Supply Current vs. Temperature**

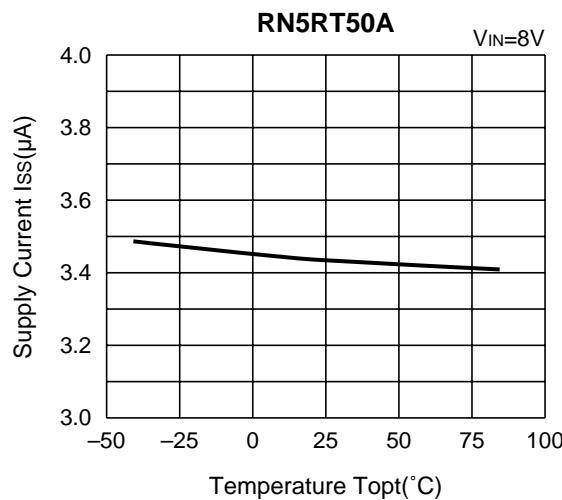


7) Dropout Voltage vs. Set Output Voltage

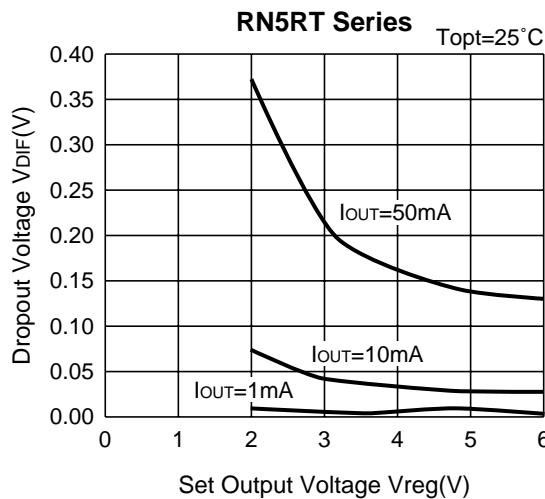

8) Line Transient Response

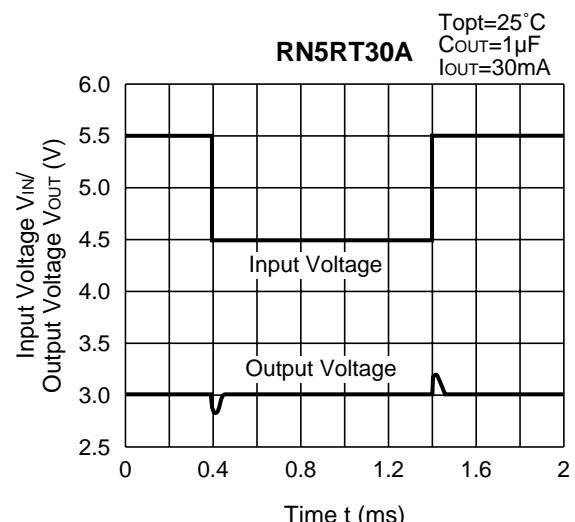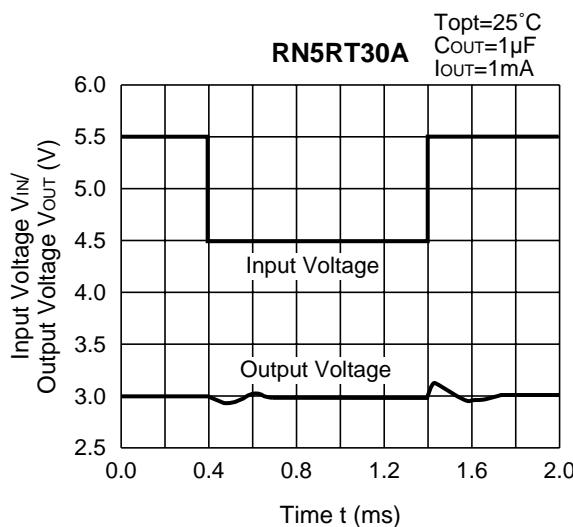

TYPICAL APPLICATION

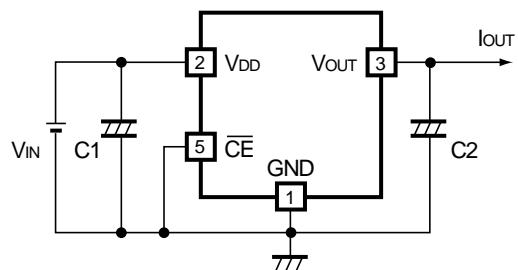

In the RN5RT Series, a constant voltage can be obtained without using capacitor C1 and C2. However, when the wire connected to V_{IN} is long, use a capacitor C1. Transient noise of output voltage occurred due to load deviation can be reduced by using a capacitor C2.

Insert capacitors C1 and C2 with the capacitance of 0.1μF to 2.0μF between input/output pins and GND pin with minimum wiring.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623