



SP6013

Synchronous Rectifier Driver

DESCRIPTION

The fundamental of SP6013 synchronous rectifier (SR) driver IC is based on our U.S. patented methods that utilize the principle of “prediction” logic circuit. The IC deliberates previous cycle timing to control the SR in present cycle by “predictive” algorithm that makes adjustments to the turn-off time, in order to achieve maximum efficiency and avoid cross-conduction at the same time. It also maintains the MOSFET’s body diode conduction at minimum level. The SP6013 is capable to adapt in almost all existing flyback converters with few adjustments considered necessary.


FEATURES

- Offers efficiency improvement over Schottky Diode (depends on drive configuration of the SR).
- Drives all logic level Power MOSFET.
- Prediction gate timing control.
- Minimum MOSFET body diode conduction.
- Operating frequency up to 650 KHz.
- Synchronize to transformer secondary voltage waveform.


APPLICATIONS

- Servers & workstations
- Storage area network power supplies
- Telecommunication converters
- Embedded systems
- Industrial & commercial systems using high current processors

PIN CONFIGURATION (SOP-8)

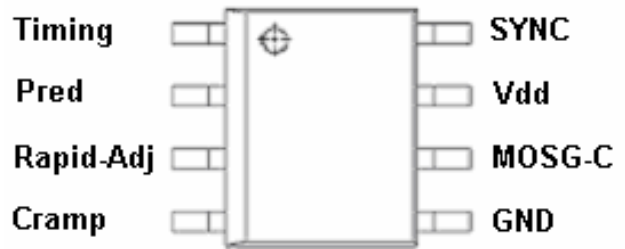


PART MARKING

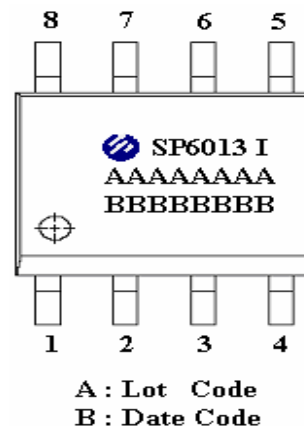



SP6013 Synchronous Rectifier Driver

TYPICAL APPLICATION CIRCUIT

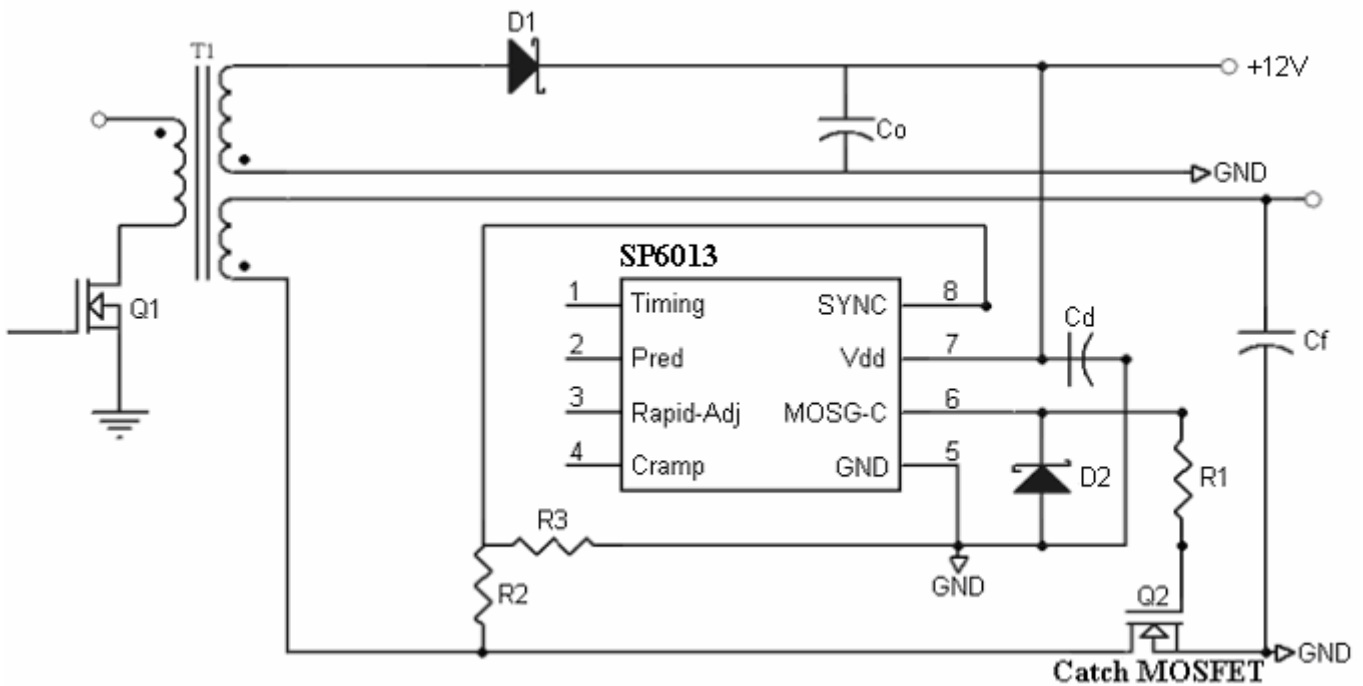

PIN DESCRIPTION


| Pin | Symbol | Description |
|-----|-----------|---|
| 1 | Timing | Discontinuous current filter timing adjustment resistor connection. |
| 2 | Pred | Capacitor to store previous cycle timing for Catch MOSFET |
| 3 | Rapid-Adj | Capacitor connection to adjust fast pulse width reduction response. |
| 4 | Cramp | Ramp capacitor adjustment to extend MOSFET's gate timing. |
| 5 | GND | Ground connection. |
| 6 | MOSG-C | Catch MOSFET gate drive. |
| 7 | Vdd | DC supply voltage. |
| 8 | SYNC | Synchronized signal from transformer's output. |



SP6013

Synchronous Rectifier Driver

BLOCK DIAGRAM

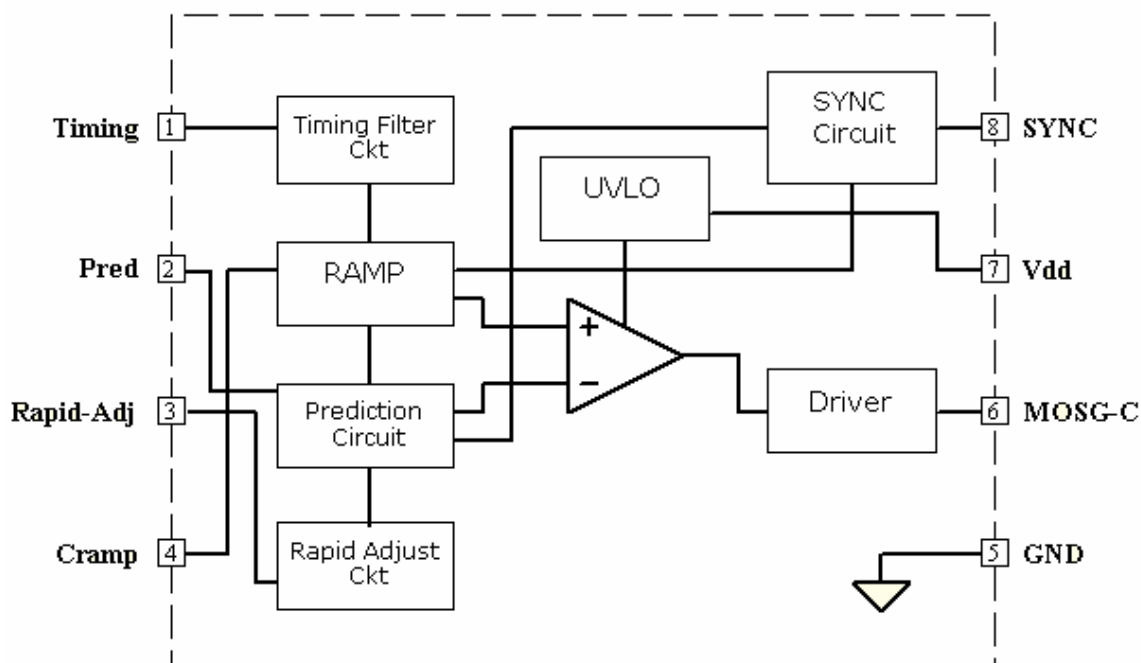

ORDERING INFORMATION

| Part Number | Package | Part Marking |
|-------------|---------|--------------|
| SP6013S8RG | SOP-8 | SP6013I |
| SP6013S8TG | SOP-8 | SP6013I |

※ SP6013S8RG : 7" Tape Reel ; Pb – Free

※ SP6013S8TG : Tube ; Pb – Free

ABSOLUTE MAXIMUM RATINGS (TA=25°C, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

| Symbol | Parameter | Value | Unit |
|-------------------|--|------------|------|
| V _{dd} | DC Supply Voltage | 17 | V |
| SYNC | SYNC Voltage | 7 | V |
| I _{OUT} | Peak Source Current (Pulsed) | 3 | A |
| | Peak Sink Current (Pulsed) | 3 | A |
| P _D | Power Dissipation @ T _A =85°C (*) | 0.25 | W |
| T _J | Operating Junction Temperature Range | -40 to 150 | °C |
| T _{STG} | Storage Temperature Range | -40 to 150 | °C |
| T _{LEAD} | Lead Soldering Temperature for 5 sec. | 260 | °C |



SP6013

Synchronous Rectifier Driver

THERMAL RESISTANCE

| Symbol | Parameter | Value | Unit |
|-----------------|--|-------|-----------------------------|
| $R_{\theta JC}$ | Thermal Resistance Junction – Case (*) | 45 | $^{\circ}\text{C}/\text{W}$ |


(*) The power dissipation and thermal resistance are evaluated under copper board mounted with free air conditions.

ELECTRICAL CHARACTERISTICS

($T_A=25^{\circ}\text{C}$, $V_{dd}=12\text{V}$, Freq. =300 KHz, Duty Cycle=50%, unless otherwise specified.)

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|------------------------------------|------------------------|---------------------------------------|------|------|------|------|
| SUPPLY INPUT | | | | | | |
| IDD | Supply current | No load | | 10 | 16 | mA |
| | | $V_{\text{SYNC}}=0\text{V}$, No load | | 7.5 | 10 | mA |
| Vonh | Vdd turn on threshold | | | 9.5 | 10 | V |
| Voffh | Vdd turn off threshold | | 8 | 8.5 | | V |
| SYNC REFERENCE (SYNC) | | | | | | |
| Vshth | SYNC high threshold | | 3.9 | 5.0 | | V |
| Vslth | SYNC low threshold | | | 0.9 | 1.2 | V |
| MOSFET GATE DRIVER (MOSG-C) | | | | | | |
| Voh | Output high voltage | $I_o = -200\text{mA}$ | 11.5 | 11.8 | | V |
| Vol | Output low voltage | $I_o = 200\text{mA}$ | | 0.1 | 0.2 | V |
| Td | Propagation delay | No load | 15 | 35 | | ns |
| Tpred | | No load | | 120 | | ns |
| Tr | Rise time | Load = 1nF (*) | | 10 | 25 | ns |
| Tf | Fall time | Load = 1nF (*) | | 10 | 25 | ns |

(*) T_r & T_f are measured among 10% and 90% of starting and final voltage.

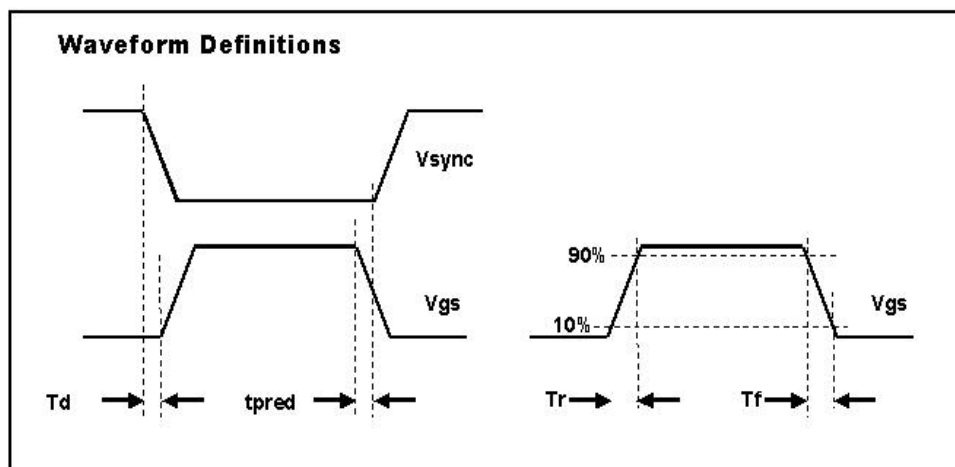



SP6013

Synchronous Rectifier Driver

PERFORMANCE CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

Figure 1 : Supply Current vs Supply Voltage

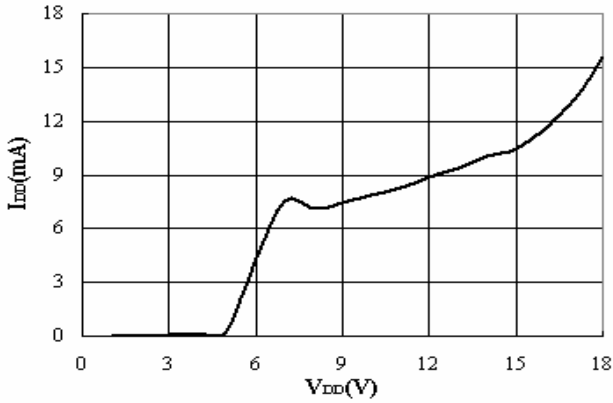


Figure 2 : Supply Current vs Freq. @ No Load

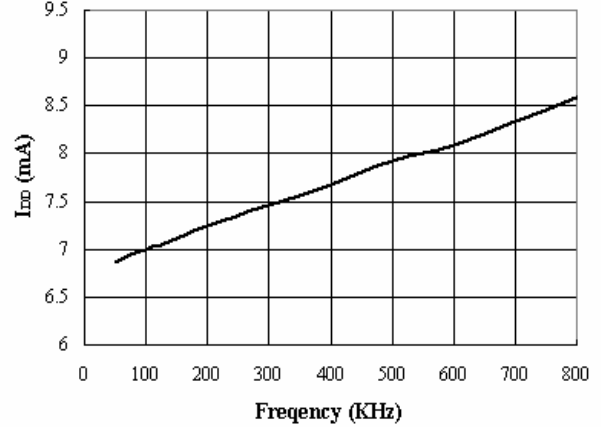


Figure 3 : T_{pred} vs C_{pred} @ Freq = 70 KHz ; $V_{DD}=10\text{V}$

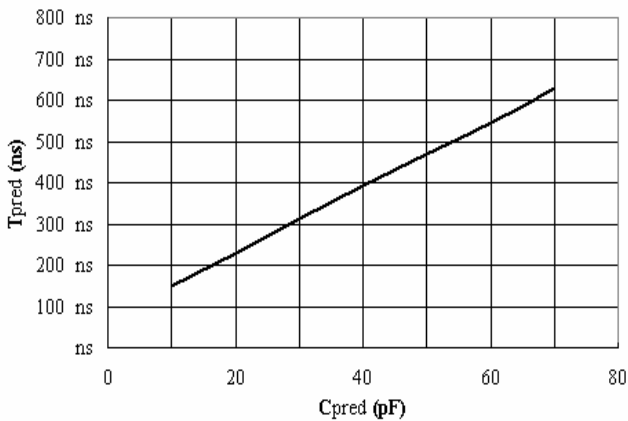


Figure 4 : Output Rise Time vs Load Capacitor

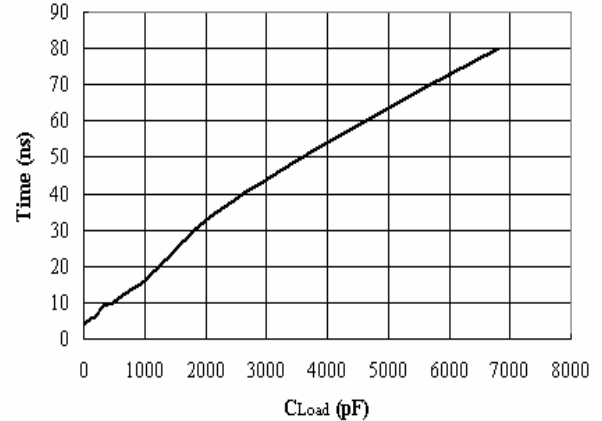


Figure 5 : Output Fall Time vs Load Capacitor


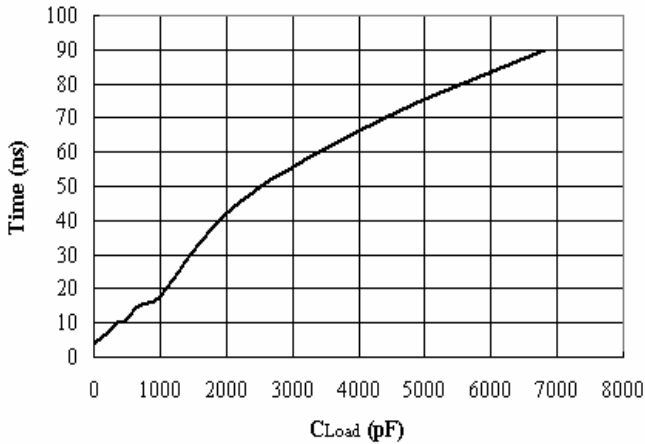


Figure 6 : T_{pred} vs C_{ramp} @ Freq = 20 KHz



*Fig. 1 : No Load ; No SYNC





*Fig. 4-5 : Frequency = 65 kHz.

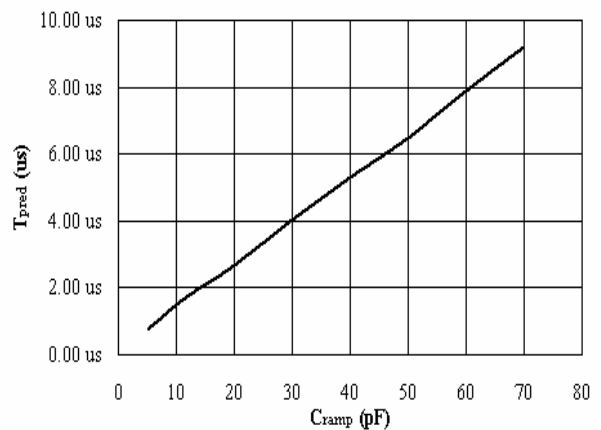

SP6013

Synchronous Rectifier Driver

SOP- 8 PACKAGE OUTLINE

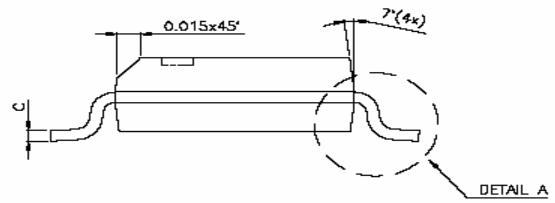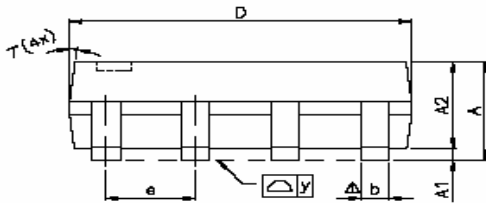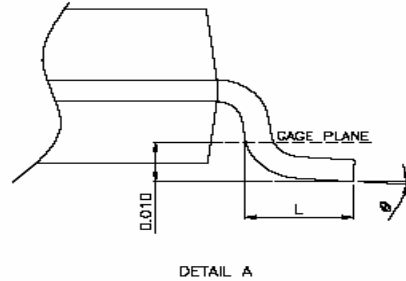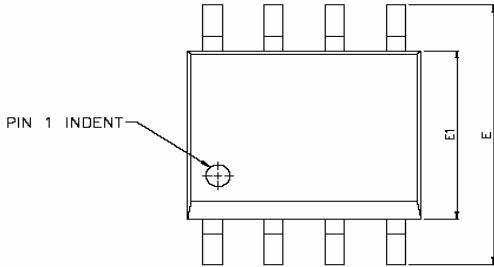

| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIMENSIONS IN INCHES | | |
|------------|---------------------------|------|-------|----------------------|-------|--------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 1.47 | 1.60 | 1.73 | 0.058 | 0.063 | 0.068 |
| A1 | 0.10 | — | 0.25 | 0.004 | — | 0.010 |
| A2 | — | 1.45 | — | — | 0.057 | — |
| b | 0.33 | 0.41 | 0.51 | 0.013 | 0.016 | 0.020 |
| C | 0.19 | 0.20 | 0.25 | 0.0075 | 0.008 | 0.0098 |
| D | 4.80 | 4.85 | 4.95 | 0.189 | 0.191 | 0.195 |
| E | 5.80 | 6.00 | 6.20 | 0.228 | 0.236 | 0.244 |
| E1 | 3.80 | 3.90 | 4.00 | 0.150 | 0.154 | 0.157 |
| e | — | 1.27 | — | — | 0.050 | — |
| L | 0.38 | 0.71 | 1.27 | 0.015 | 0.028 | 0.050 |
| Δ y | — | — | 0.076 | — | — | 0.003 |
| θ | 0° | — | 8° | 0° | — | 8° |



SP6013

Synchronous Rectifier Driver

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties, which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

©The SYNC Power logo is a registered trademark of SYNC Power Corporation
©2004 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved
SYNC Power Corporation
9F-5, No.3-2, Park Street
NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C
Phone: 886-2-2655-8178
Fax: 886-2-2655-8468
<http://www.syncpower.com>