
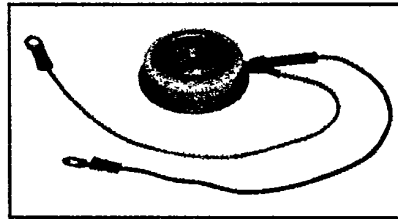


# POWEREX

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272  
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

## T620/T630

**Phase Control SCR**  
 150-300 Amperes Avg  
 100-1600 Volts

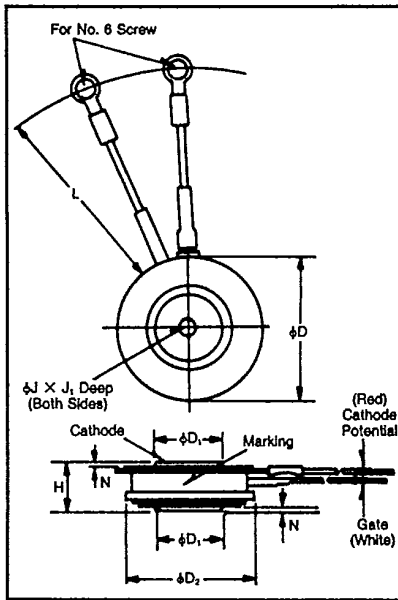

**T620/T630**  
**Phase Control SCR**  
 150-300 Amperes/100-1600 Volts

### Description

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

### Features:

- Low On-State Voltage
- High di/dt
- High dv/dt
- Hermetic Packaging
- Excellent Surge and  $I^2t$  Ratings

### Applications:

- Power Supplies
- Battery Chargers
- Motor Control
- Light Dimmers
- VAR Generators

### Ordering Information

Example: Select the complete eight digit part number you desire from the table - i.e. T6200820 is a 800 Volt, 200 Ampere Phase Control SCR.

### T62

#### Outline Drawing

Dimensions	Inches		Millimeters	
	Min.	Max.	Min.	Max.
$\phi D$	1.610	1.650	40.89	41.91
$\phi D_1$	.745	.755	18.92	19.18
$\phi D_2$	1.420	1.460	36.07	37.08
H	.500	.560	12.70	14.22
$\phi J$	.135	.145	3.43	3.68
$J_1$	.072	.082	1.83	2.08
L	7.75	8.50	196.85	215.90
N	.030	—	.76	—

Creep Distance—.34 in. min. (8.64 mm)

Strike Distance—.26 in. min. (6.60 mm).

(In accordance with NEMA standards.)

Finish—Nickel Plate.

Approx. Weight—2.3 oz. (66 g).

1. Dimension "H" is clamped dimension.

Type	Voltage		Current	
	$V_{ORM}$	Code	$I_r$ (avg)	Code
T630	100	01	150	15
	200	02	200	20
	300	03	300	30
	400	04		
	500	05		
	600	06		
T620	700	07		
	800	08		
	900	09		
	1000	10		
	1100	11		
	1200	12		
	1300	13		
	1400	14		
	1500	15		
	1600	16		



T-25-19

Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

T620/T630

Phase Control SCR

150-300 Amperes Avg/100-1600 Volts

### Absolute Maximum Ratings

	Symbol	T620 -- 15	T620 -- 20	T620 -- 30	Units
		T630 -- 15	T630 -- 20	T630 -- 30	
RMS On-State Current	$I_{T(RMS)}$	235	315	470	Amperes
Average On-State Current	$I_{T(av)}$	150	200	300	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz) <sup>①</sup>	$I_{TSM}$	3300	4000	5500	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) <sup>①</sup>	$I_{TSM}$	3000	3650	5000	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive) <sup>① ② ③</sup>	di/dt	800	800	800	Amperes/ $\mu$ s
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	150	150	150	Amperes/ $\mu$ s
$I^2t$ (for Fusing), 8.3 milliseconds	$I^2t$	45,000	64,400	120,000	A <sup>2</sup> sec
Peak Gate Power Dissipation	$P_{GM}$	16	16	16	Watts
Average Gate Power Dissipation	$P_{G(av)}$	3	3	3	Watts
Storage Temperature	$T_{STG}$	-40 to 150	-40 to 150	-40 to 150	°C
Operating Temperature	$T_J$	-40 to 125	-40 to 125	-40 to 125	°C
Mounting Force <sup>④</sup>		1000 to 1400	1000 to 1400	1000 to 1400	lb.
Mounting Force <sup>④</sup>		450 to 635	450 to 635	450 to 635	kg

① Consult recommended mounting procedures.

② Applies for zero or negative gate bias.

③ Per JEDEC RS-397, 5.2.2.1.

④ With recommended gate drive.

⑤ Higher dv/dt ratings available, consult factory.

⑥ Per JEDEC standard RS-397, 5.2.2.6.



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272  
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

T620/T630  
 Phase Control SCR  
 150-300 Amperes Avg/100-1600 Volts

### Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	T620	T620	T620	Units	
			_ _ 15	_ _ 20	_ _ 30		
			T630	T630	T630		
			_ _ 15	_ _ 20	_ _ 30		
<b>Current—Conducting State Maximums</b>							
Peak On-State Voltage	$V_{TM}$	$I_{TM} = 625A, T_J = 25^\circ C$	2.6	2.05	1.55	Volts	
			T620/T630				
<b>Voltage—Blocking State Maximums<sup>ⓐ</sup></b>							
Forward Leakage, Peak	$I_{DRM}$	$T_J = 125^\circ C, V_{DRM} = \text{rated}$		25		mA	
Reverse Leakage, Peak	$I_{RRM}$	$T_J = 125^\circ C, V_{RRM} = \text{rated}$		25		mA	
<b>Switching</b>							
Typical Turn-Off Time	$t_q$	$I_T = 150A, T_J = 125^\circ C,$ $di_R/dt = 12.5A/\mu\text{sec},$ reapplied $dv/dt = 20V/\mu\text{sec}$ linear to $0.8V_{DRM}$		100		$\mu\text{sec}$	
Typical Turn-On Time <sup>ⓑ</sup>	$t_{on}$	$I_T = 100A, V_D = 100V$		5		$\mu\text{sec}$	
Min. Critical $dv/dt$ exponential to $V_{DRM}$ <sup>ⓑ</sup>	$dv/dt$	$T_J = 125^\circ C$		300		V/ $\mu\text{sec}$	
<b>Thermal</b>							
Maximum Thermal Resistance, <sup>ⓐ</sup> double sided cooling							
Junction to Case	$R_{\theta JC}$			.08		$^\circ C/\text{Watt}$	
Case to Sink, Lubricated	$R_{\theta CS}$			.02		$^\circ C/\text{Watt}$	
<b>Gate—Maximum Parameters</b>							
Gate Current to Trigger	$I_{GT}$	$T_J = 25^\circ C, V_D = 12V$		150		mA	
Gate Voltage to Trigger	$V_{GT}$	$T_J = 25^\circ C, V_D = 12V$		3		Volts	
Non-Trigging Gate Voltage	$V_{GDM}$	$T_J = 125^\circ C, \text{rated } V_{DRM}$		.15		Volts	
Peak Forward Gate Current	$I_{GTM}$			4		Amperes	
Peak Reverse Gate Voltage	$V_{GRM}$			5		Volts	

ⓐ Consult recommended mounting procedures.

ⓑ Applies for zero or negative gate bias.

ⓐ Per JEDEC RS-397, 5.2.2.1.

ⓐ With recommended gate drive.







ⓐ Higher  $dv/dt$  ratings available, consult factory.

ⓐ Per JEDEC standard RS-397, 5.2.2.6.



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272  
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

**T620/T630**  
**Phase Control SCR**  
 150-300 Amperes Avg/100-1600 Volts

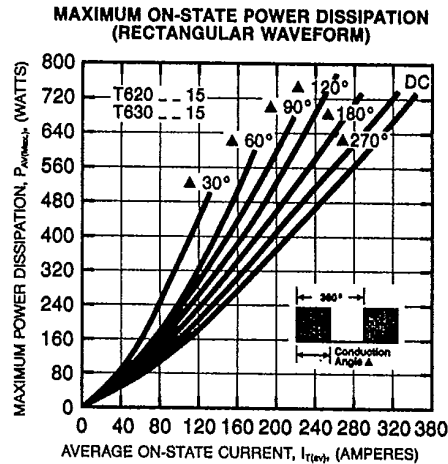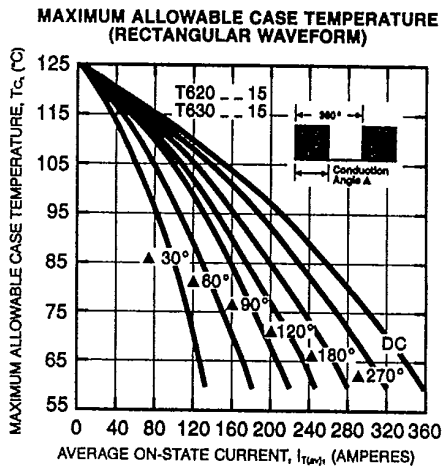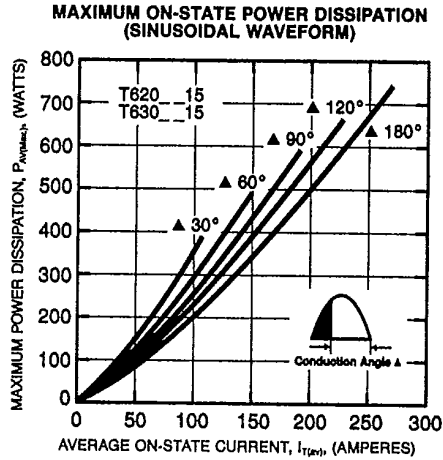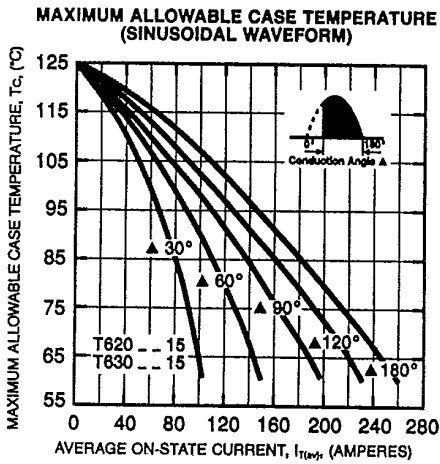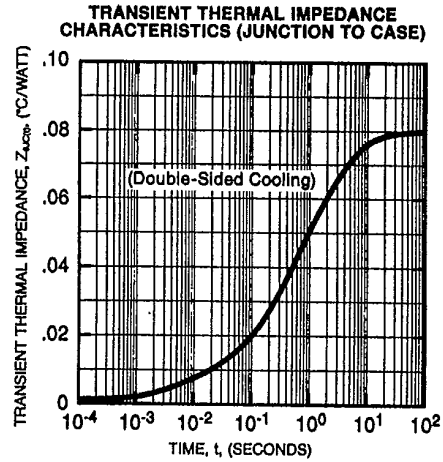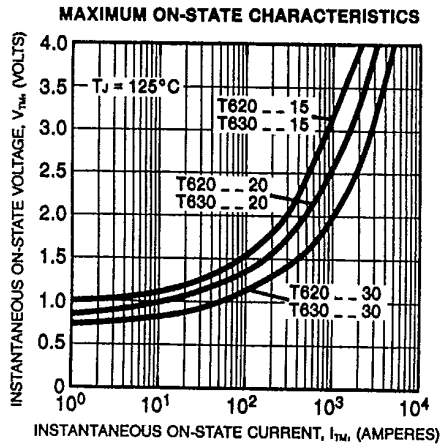









Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

**T620/T630**

**Phase Control SCR**

150-300 Amperes Avg/100-1600 Volts

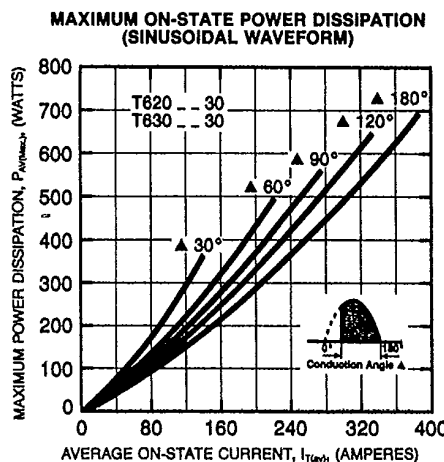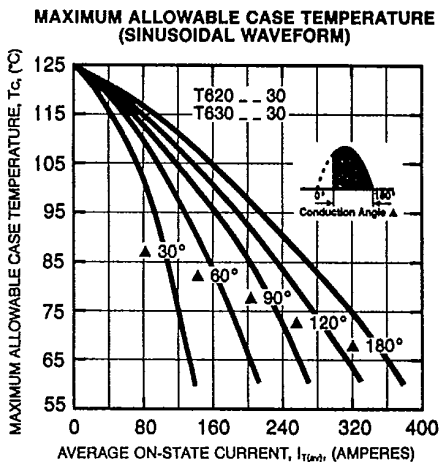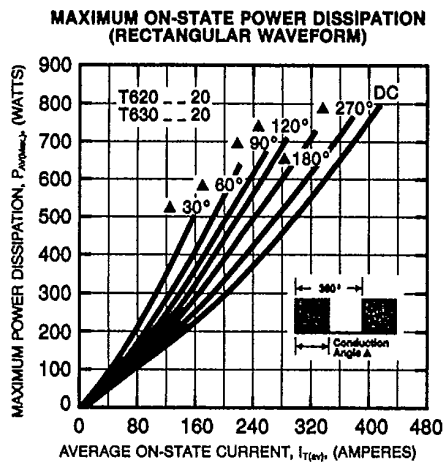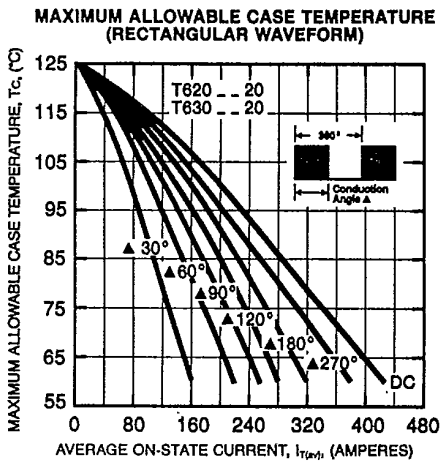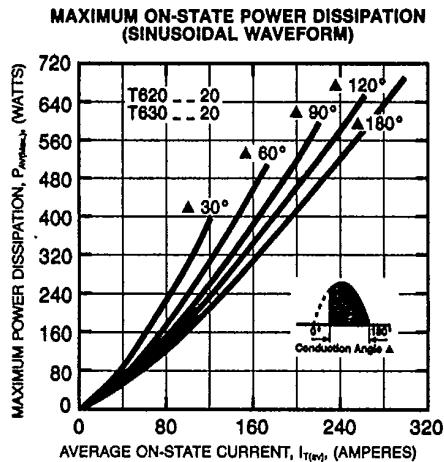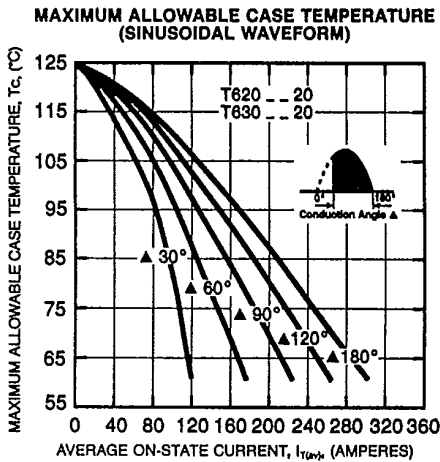



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

**T620/T630**

**Phase Control SCR**

150-300 Amperes Avg/100-1600 Volts

