

HIGH FREQUENCY MAGNETICS

Specialty Through Hole Shielded Transformer

TM00105

- Operates as high frequency pulse transformer or as high frequency analog transformer in various telecom circuits requiring very high voltage step-up ratio
- Interwinding Electrostatic Shield provides low capacitance and high EMI suppression
- Electrical equivalents: 2664F, 2779A
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ±1%	Inductance ² μH Min	DCR Ω max	Leakage Inductance ² μH max	Interwinding Capacitance pF max			Minimum Interwinding Breakdown Voltage Vrms
	(3-7) : (2-1) ¹	(2-5)	(3-8)(4-7)(2-1) ³	(3-7) ¹	(3-8) to 6 ⁴	(4-7) to 6 ⁴	(3-7) : (2-1) ⁵	
2741P2	1 CT : 25 CT	300	1.92	0.2	5	5	5	500

1. connect 4 to 8

2. measured at 100kHz, 0.02 Vac


3. connect 4 to 8 & 2 to 7

4. with (2-1) grounded

5. with 6 grounded and 4 connected to 8

SCHEMATIC

2741P2

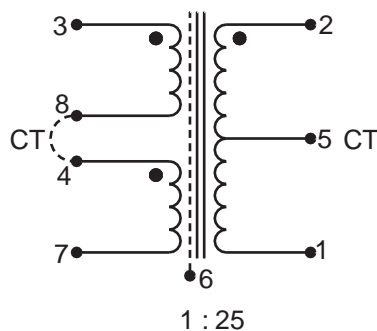


HIGH FREQUENCY MAGNETICS

Specialty Through Hole Shielded Transformer

MECHANICAL

2741P2

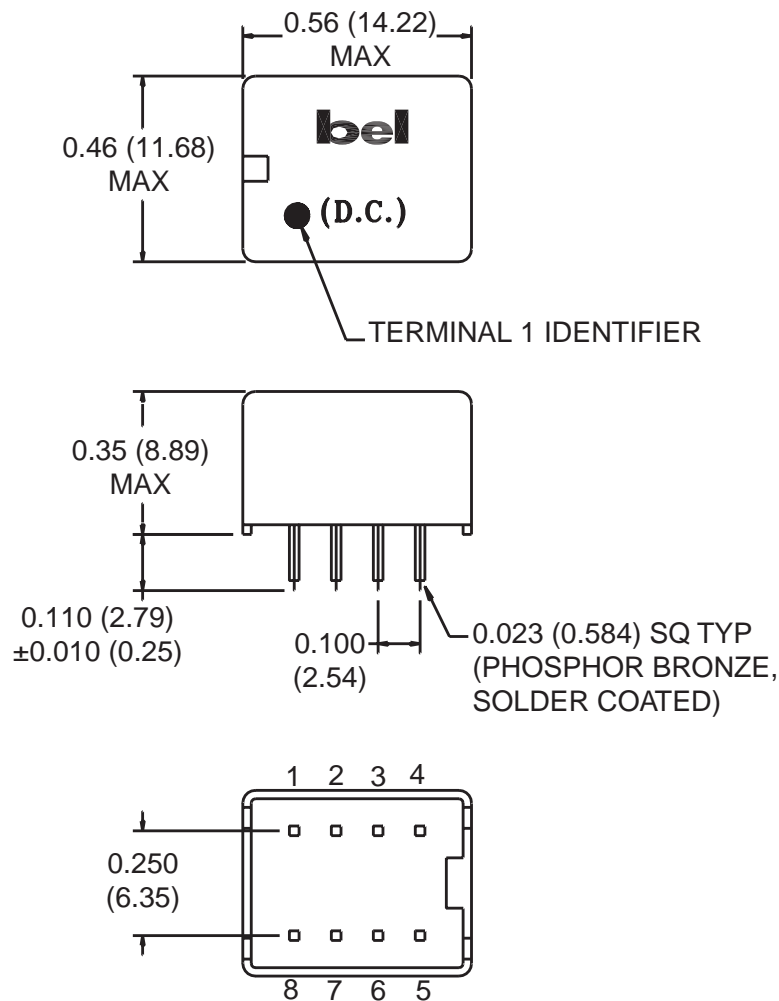

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com