


New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (973) 376-2922
 (212) 227-6005
 FAX: (973) 376-8960

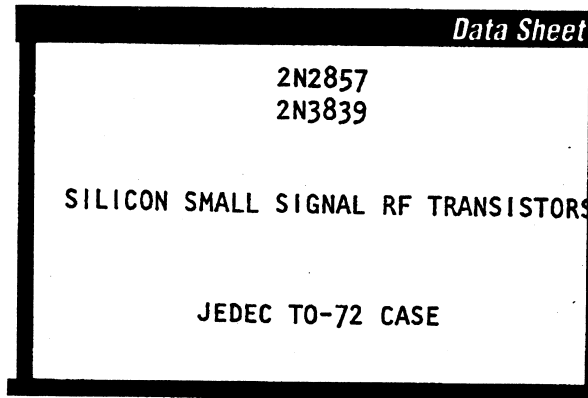

DESCRIPTION


The SEMICONDUCTOR 2N2857, 2N3839 types are NPN Silicon Small Signal Transistors designed for use in VHF/UHF amplifier, oscillator and converter applications.

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	<u>SYMBOL</u>		<u>UNIT</u>
Collector-Base Voltage	V_{CB0}	30	V
Collector-Emitter Voltage	V_{CE0}	15	V
Emitter-Base Voltage	V_{EB0}	2.5	V
Collector Current	I_C	40	mA
Power Dissipation	P_D	200	mW
Power Dissipation @ $T_C=25^{\circ}\text{C}$	P_D	300	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 TO +200	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>2N2857</u>		<u>2N3839</u>		<u>UNIT</u>
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	
I_{CB0}	$V_{CB}=15\text{V}$		10		10	nA
I_{CBO}	$V_{CB}=15\text{V}, T_A=150^{\circ}\text{C}$		1.0		1.0	μA
BV_{CB0}	$I_C=1.0\mu\text{A}$	30		30		V
BV_{CE0}	$I_C=3.0\text{mA}$	15		15		V
BV_{EB0}	$I_E=10\mu\text{A}$	2.5		2.5		V
h_{FE}	$V_{CE}=1.0\text{V}, I_C=3.0\text{mA}$	30	150	30	150	-
f_T	$V_{CE}=6.0\text{V}, I_C=5.0\text{mA}, f=100\text{MHz}$	1.0	1.9	1.0	2.0	GHz
C_{cb}	$V_{CB}=10\text{V}, f=0.1 \text{ TO } 1.0\text{MHz}$		1.0		1.0	pF
C_{eb}	$V_{EB}=0.5\text{V}, f=1.0\text{MHz}$		1.4 TYP		1.4 TYP	pF
NF	$V_{CE}=6.0\text{V}, I_C=1.5\text{mA}, f=450\text{MHz}, R_S=50\Omega$		4.5		3.9	dB
$r_b' C_c$	$V_{CB}=6.0\text{V}, I_C=2.0\text{mA}, f=31.9\text{MHz}$	4.0	15	1.0	15	ps
G_{pe}	$V_{CE}=6.0\text{V}, I_C=1.5\text{mA}, f=450\text{MHz}$	12.5	19	12.5	19	dB
P_{out}	$V_{CB}=10\text{V}, I_C=12\text{mA}, f=500\text{MHz}$	30		30		mW



Quality Semi-Conductors