
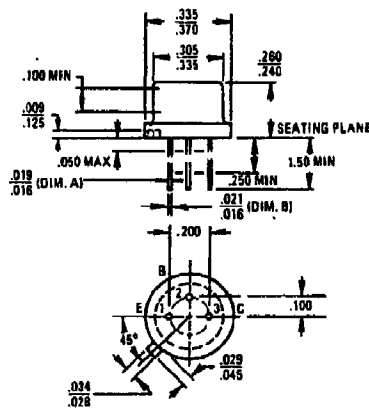


UNIUNCTION TRANSISTORS

TO-5 CASE

TYPE	INTRINSIC STANDOFF RATIO $\eta$		INTERBASE RESISTANCE $r_{BB}$		PEAK-POINT CURRENT $I_P$	EMITTER REV. CURRENT $I_{EB20 @ V_{B2E}}$		VALLEY-POINT CURRENT $I_V$	BASE 1 PEAK VOLTAGE $V_{OB1}$	CASE
	MIN.	MAX.	MIN.	MAX.	MAX.	MAX.		MIN.	MIN.	
			k $\Omega$	k $\Omega$	$\mu A$	$\mu A$	V	mA	V	
2N489	0.51	0.62	4.7	6.8	12	2.0	60	8.0	—	
2N489A	0.51	0.62	4.7	6.8	12	2.0	60	8.0	3.0	
2N489B	0.51	0.62	4.7	6.8	6.0	0.2	30	8.0	3.0	
2N490	0.51	0.62	6.2	9.1	12	2.0	60	8.0	—	
2N490A	0.51	0.62	6.2	9.1	12	2.0	60	8.0	3.0	
2N490B	0.51	0.62	6.2	9.1	6.0	0.2	30	8.0	3.0	
2N490C	0.51	0.62	6.2	9.1	2.0	0.02	30	8.0	3.0	
2N491	0.56	0.68	4.7	6.8	12	2.0	60	8.0	—	
2N491A	0.56	0.68	4.7	6.8	12	2.0	60	8.0	3.0	
2N491B	0.56	0.68	4.7	6.8	6.0	0.2	30	8.0	3.0	
2N492	0.56	0.68	6.2	9.1	12	2.0	60	8.0	—	
2N492A	0.56	0.68	6.2	9.1	12	2.0	60	8.0	3.0	
2N492B	0.56	0.68	6.2	9.1	6.0	0.2	30	8.0	3.0	
2N492C	0.56	0.68	6.2	9.1	2.0	0.02	30	8.0	3.0	
2N493	0.62	0.75	4.7	6.8	12	2.0	60	8.0	—	
2N493A	0.62	0.75	4.7	6.8	12	2.0	60	8.0	3.0	
2N493B	0.62	0.75	4.7	6.8	6.0	0.2	30	8.0	3.0	
2N494	0.62	0.75	6.2	9.1	12	2.0	60	8.0	—	
2N494A	0.62	0.75	6.2	9.1	12	2.0	60	8.0	3.0	
2N494B	0.62	0.75	6.2	9.1	6	0.2	30	8.0	3.0	
2N494C	0.62	0.75	6.2	9.1	2.0	0.02	30	8.0	3.0	
2N1671	0.47	0.62	4.7	9.1	25	12	30	8.0	—	
2N1671A	0.47	0.62	4.7	9.1	25	12	30	8.0	3.0	
2N1671B	0.47	0.62	4.7	9.1	6.0	0.2	30	8.0	3.0	
2N1671C	0.47	0.62	4.7	9.1	2.0	0.02	30	8.0	3.0	
2N2160	0.47	0.80	4.0	12	25	12	30	8.0	3.0	
2N3479	0.47	0.62	4.7	9.1	20	12	30	4.0	3.0	
2N3480	0.56	0.75	4.7	9.1	20	12	30	4.0	3.0	
2N3481	0.70	0.85	4.7	9.1	20	12	30	4.0	3.0	
2N3482	0.51	0.62	4.7	6.8	2.0	0.02	30	4.0	4.0	
2N3483	0.60	0.72	4.7	9.1	5.0	1.0	30	4.0	4.0	
2N3484	0.70	0.85	6.2	9.1	5.0	0.2	30	4.0	6.0	

TO-5



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

