

## Silicon PNP Power Transistors

2SA1064

## DESCRIPTION

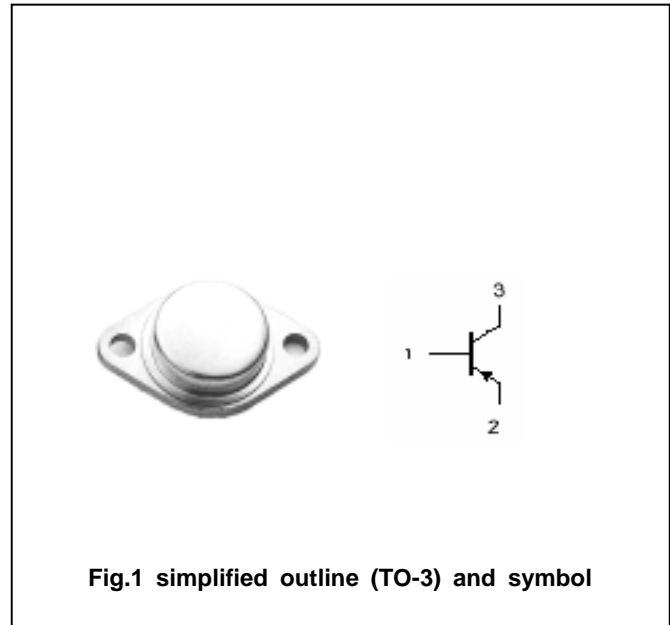
- With TO-3 package
- Low collector saturation voltage
- Complement to type 2SC2488
- High transition frequency

## APPLICATIONS

- For audio frequency amplifier and high power amplifier applications

## PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

Absolute maximum ratings( $T_a =$ )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	-150	V
$V_{CEO}$	Collector-emitter voltage	Open base	-150	V
$V_{EBO}$	Emitter-base voltage	Open collector	-5	V
$I_C$	Collector current		-8	A
$I_{CM}$	Collector current-peak		-12	A
$P_C$	Collector power dissipation	$T_C=25$	100	W
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-65~150	

## Silicon PNP Power Transistors

## 2SA1064

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =-0.1A ; I <sub>B</sub> =0	-150			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-8A ; I <sub>B</sub> =-0.8A			-2.0	V
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =-8A ; V <sub>CE</sub> =-5V			-2.5	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-70V ; I <sub>E</sub> =0			-1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-5V ; I <sub>C</sub> =0			-2	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =-1A ; V <sub>CE</sub> =-5V	40		280	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =-8A ; V <sub>CE</sub> =-5V	20			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-0.5A ; V <sub>CE</sub> =-5V		50		MHz

◆ h<sub>FE-1</sub> Classifications

R	Q	P	O
40-80	60-120	90-180	140-280

Silicon PNP Power Transistors

2SA1064

PACKAGE OUTLINE



Fig.2 outline dimensions (unindicated tolerance:  $\pm 0.1\text{mm}$ )