

Silicon NPN Power Transistors

2SD425 2SD426

DESCRIPTION

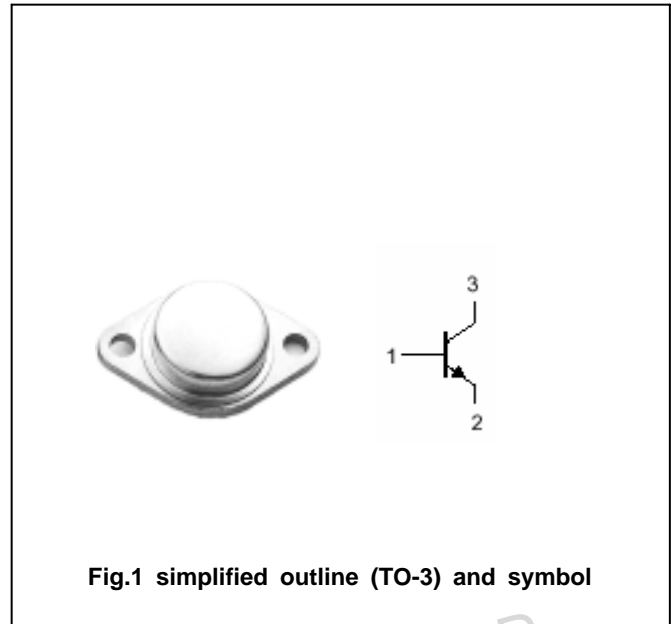
- With TO-3 package
- Complement to type 2SB555/556
- High power dissipation

APPLICATIONS

- Power amplifier applications
- Recommended for high-power high-fidelity audio frequency amplifier output stage

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

Absolute maximum ratings($T_a =$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2SD425	140	V
		2SD426	120	
V_{CEO}	Collector-emitter voltage	2SD425	140	V
		2SD426	120	
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		12	A
I_E	Emitter current		12	A
P_C	Collector power dissipation	$T_C=25$	100	W
T_j	Junction temperature		150	
T_{stg}	Storage temperature		-65~150	

Silicon NPN Power Transistors

2SD425 2SD426

CHARACTERISTICS

T_j=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	2SD425	I _C =0.1A ; I _B =0	140			V
		2SD426		120			
V _{(BR)EBO}	Emitter-base breakdown voltage		I _E =10mA ; I _C =0	5			V
V _{CEsat}	Collector-emitter saturation voltage	2SD425	I _C =7A ; I _B =0.7A			3.0	V
		2SD426	I _C =6A ; I _B =0.6A				
V _{BE}	Base-emitter on voltage		I _C =7A ; V _{CE} =5V			2.5	V
I _{CBO}	Collector cut-off current		V _{CB} =50V ; I _E =0			0.1	mA
I _{EBO}	Emitter cut-off current		V _{EB} =5V ; I _C =0			0.1	mA
h _{FE}	DC current gain		I _C =2A ; V _{CE} =5V	40		140	
f _T	Transition frequency		I _C =2A ; V _{CE} =5V		5		MHz

