

**DUAL AUDIO POWER AMPLIFIER****AA8227****General Description**

The AA8227 is a monolithic dual audio power amplifier with built-in power on/off switch. It is designed for use in portable radio cassette, tape recorder and other audio products.

Because it needs only few external components to work, an audio system adopting AA8227 will have a remarkable merit to save system space.

This IC is available in HDIP-12 package.

Features

- High Power: $P_{OUT}=2.5W/CH$ (Typ) at $R_L=4\Omega$, $V_{CC1}=V_{CC2}=9V$, THD=10%
- Built-in Standby Switch
- Built-in Thermal Shutdown Protection Circuit
- Low Popping Noise at Power On
- Soft Clip
- Few External Components
- Operating Supply Voltage Range: 5 to 15 V

Applications

- Mini 2.1-CH or 5.1-CH Audio Sound System
- PC External Audio Power Amplifier
- Portable Radio Cassette
- Tape Recorder
- Active Speaker

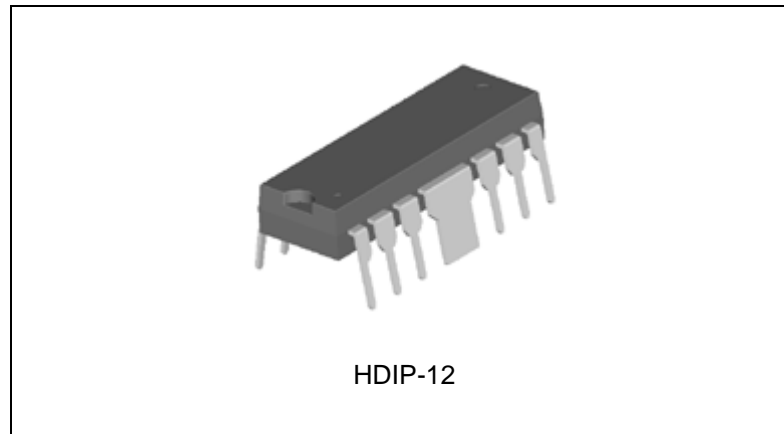


Figure 1. Package Type of AA8227



DUAL AUDIO POWER AMPLIFIER

AA8227

Pin Configuration

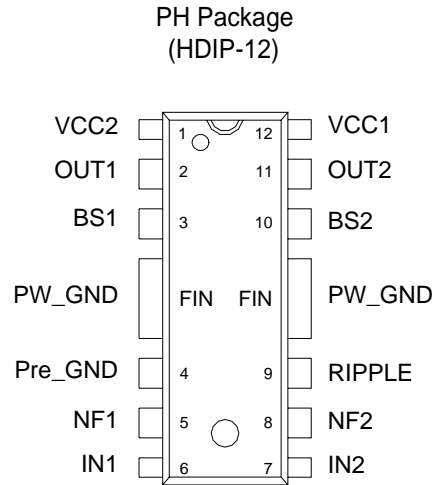


Figure 2. Pin Configuration of AA8227 (Top View)

Pin Description

Pin Number	Pin Name	Function
1	VCC2	Supply voltage 2
2	OUT1	Output of channel 1
3	BS1	Bootstrap of channel 1
4	Pre_GND	Prestage ground
5	NF1	Negative feedback of channel 1
6	IN1	Input of channel 1
7	IN2	Input of channel 2
8	NF2	Negative feedback of channel 2
9	RIPPLE	Ripple rejection
10	BS2	Bootstrap of channel 2
11	OUT2	Output of channel 2
12	VCC1	Supply voltage 1
FIN	PW_GND	Power ground



DUAL AUDIO POWER AMPLIFIER

AA8227

Functional Block Diagram

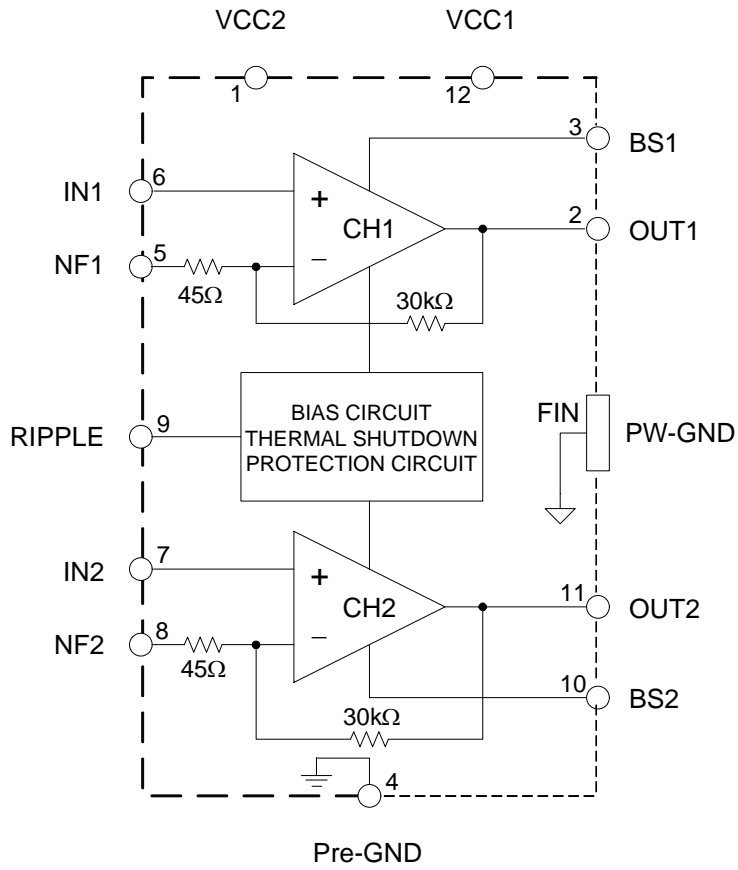
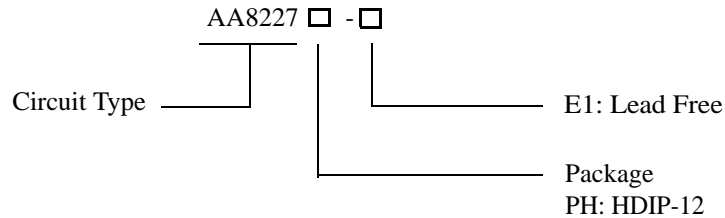


Figure 3. Functional Block Diagram of AA8227

**DUAL AUDIO POWER AMPLIFIER****AA8227****Ordering Information**

Package	Temperature Range	Part Number	Marking ID	Packing Type
HDIP-12	0 to 70 °C	AA8227PH-E1	AA8227PH-E1	Tube

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.

Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC1}, V_{CC2}	18	V
Peak Output Current (Each Channel)	I_O (peak)	2.5	A
Total Power Dissipation	P_D	4	W
Operating Ambient Temperature	T_A	-20 to 85	°C
Storage Temperature	T_{STG}	-50 to 150	°C

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_{CC1}, V_{CC2}	5	15	V
Operating Ambient Temperature	T_A	0	70	°C



DUAL AUDIO POWER AMPLIFIER

AA8227

Electrical Characteristics

($V_{CC1}=V_{CC2}=9V$, $T_A=25^{\circ}C$, $R_L=4\Omega$, $R_g=600\Omega$, $f=1KHz$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	V_{CC}		5		15	V
Quiescent Current	I_{CC}	$V_{IN}=0$		21	45	mA
Quiescent Output Voltage	V_2, V_{11}	$V_{IN}=0$		4.5		V
Output Power (Each Channel)	P_{OUT}	THD=10%, $R_L=4\Omega$	2.0	2.5		W
		THD=10%, $R_L=3\Omega$		3.0		
Total Harmonic Distortion	THD	$P_{OUT}=0.4W/CH$		0.2	1.0	%
Closed Loop Voltage Gain	G_V	$R_{NF}=120\Omega$, $V_{OUT}=0.775V_{rms}$	43	45	47	dB
		$R_{NF}=0\Omega$, $V_{OUT}=0.775V_{rms}$		56.5		
Channel Balance	ΔG_V			0.3	± 1	dB
Input Resistance	R_I			30		k Ω
Output Noise Voltage	V_{NO}	$R_g=10k\Omega$, BW=20 to 20kHz		0.3	1.0	mVrms
Ripple Rejection Ratio	PSRR	$f=100Hz$		52		dB
Channel Separation	C_S	$V_{OUT}=0.775V_{rms}$		50		dB
Input Offset Voltage	V_6, V_7			30	60	mV
Standby Current	I_{STB}	SW1=off		1		μA
Thermal Shutdown Junction Temperature	T_{SD}			175		$^{\circ}C$

Typical Pin DC Voltage ($V_{CC1}=V_{CC2}=9V$, $T_A=25^{\circ}C$)

Pin Number	Pin Name	DC Voltage (V)
1	VCC2	9
2	OUT1	4.5
3	BS1	8.7
4	Pre_GND	GND
5	NF1	0.7
6	IN1	0.03
7	IN2	0.03
8	NF2	0.7
9	RIPPLE	5
10	BS2	8.7
11	OUT2	4.5
12	VCC1	9



DUAL AUDIO POWER AMPLIFIER

AA8227

Typical Performance Characteristics

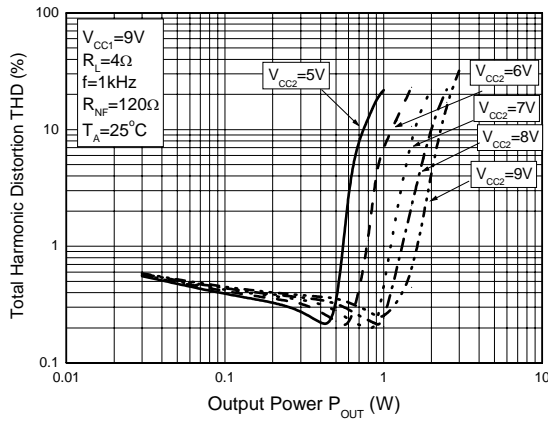


Figure 4. Total Harmonic Distortion vs. Output Power

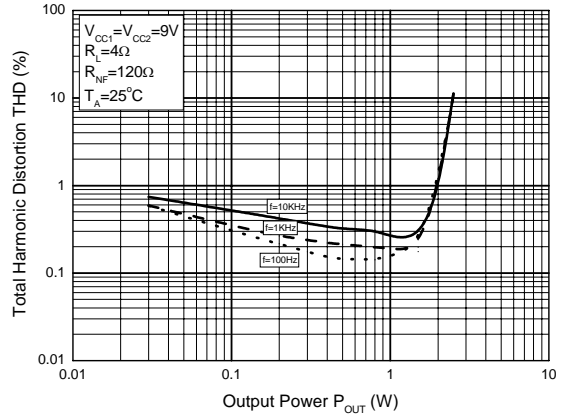


Figure 5. Total Harmonic Distortion vs. Output Power

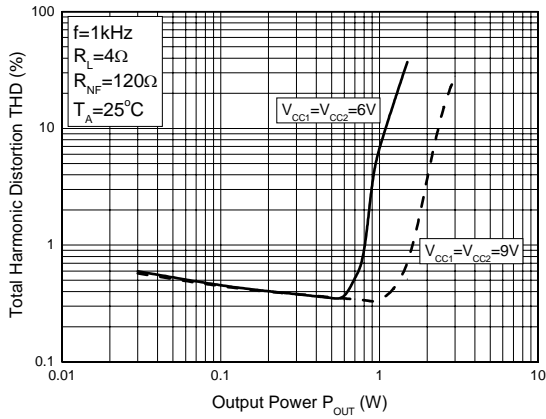


Figure 6. Total Harmonic Distortion vs. Output Power

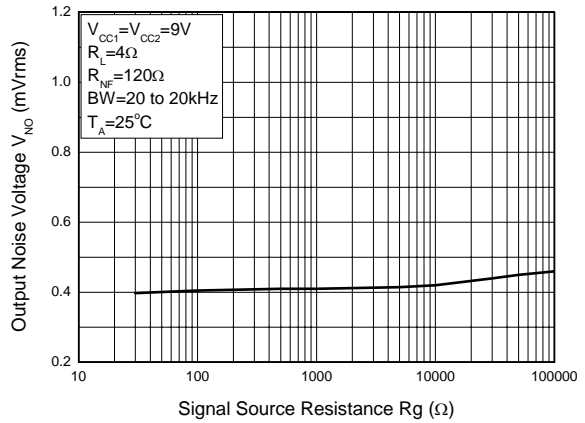


Figure 7. Output Noise Voltage vs. Signal Source Resistance



DUAL AUDIO POWER AMPLIFIER

AA8227

Typical Performance Characteristics (Continued)

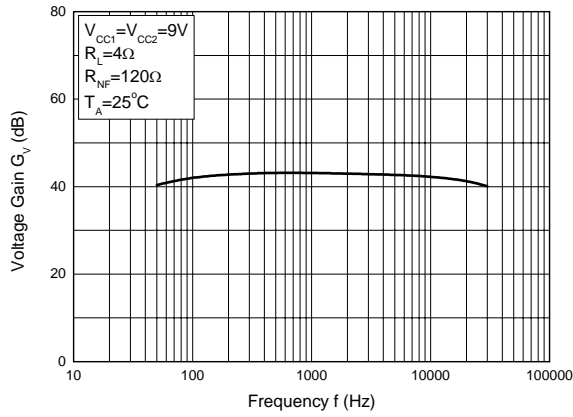


Figure 8. Voltage Gain vs. Frequency

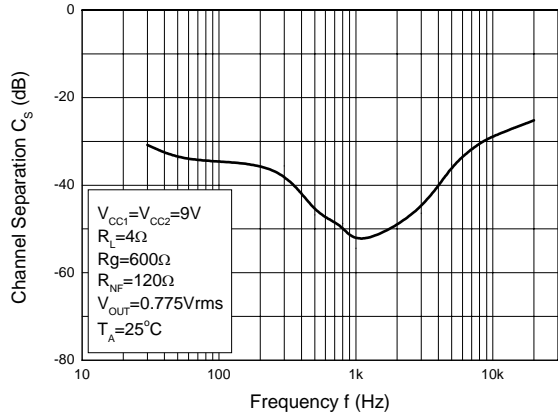


Figure 9. Channel Separation vs. Frequency

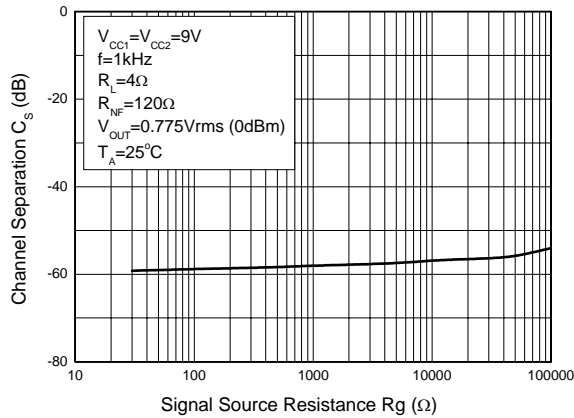


Figure 10. Channel Separation vs. Signal Source Resistance

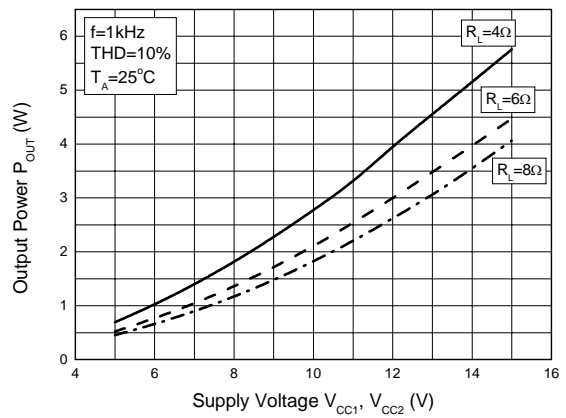


Figure 11. Output Power vs. Supply Voltage



DUAL AUDIO POWER AMPLIFIER

AA8227

Typical Performance Characteristics (Continued)

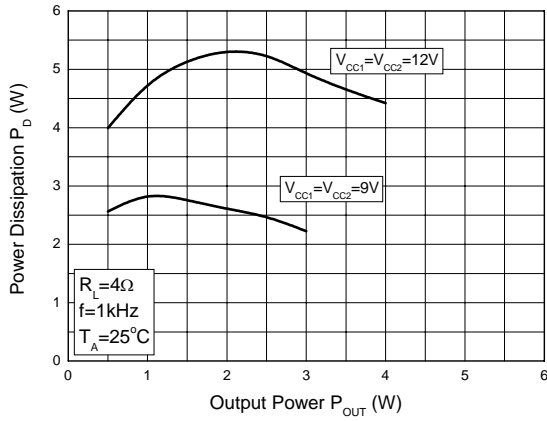


Figure 12. Power Dissipation vs. Output Power

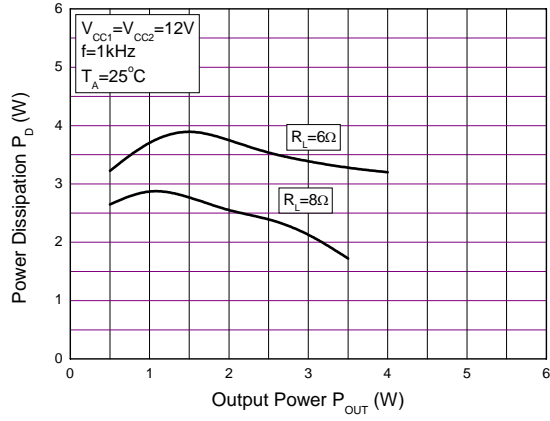


Figure 13. Power Dissipation vs. Output Power

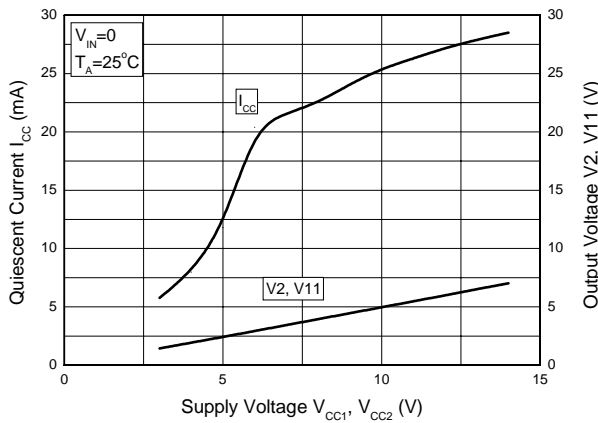


Figure 14. Quiescent Current and Output Voltage vs. Supply Voltage

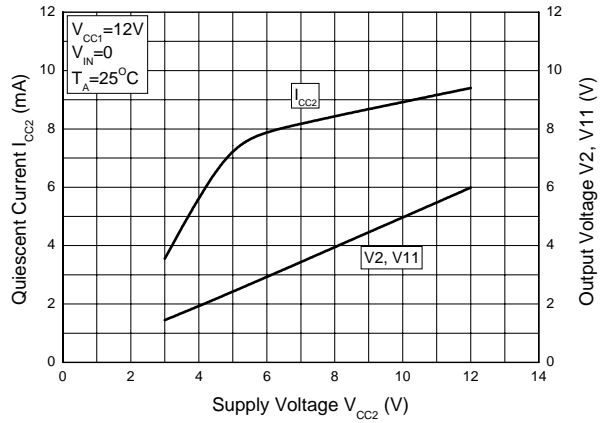


Figure 15. Quiescent Current and Output Voltage vs. Supply Voltage



DUAL AUDIO POWER AMPLIFIER

AA8227

Typical Performance Characteristics (Continued)

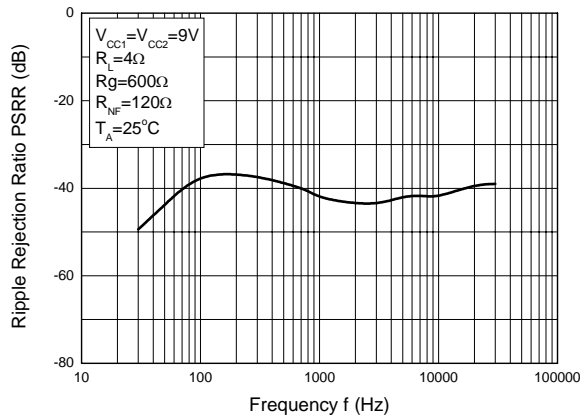


Figure 16. Ripple Rejection Ratio vs. Frequency

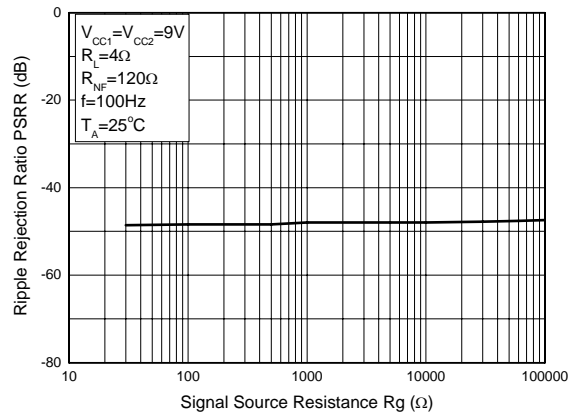


Figure 17. Ripple Rejection Ratio vs. Signal Source Resistance



DUAL AUDIO POWER AMPLIFIER

AA8227

Typical Application Circuit

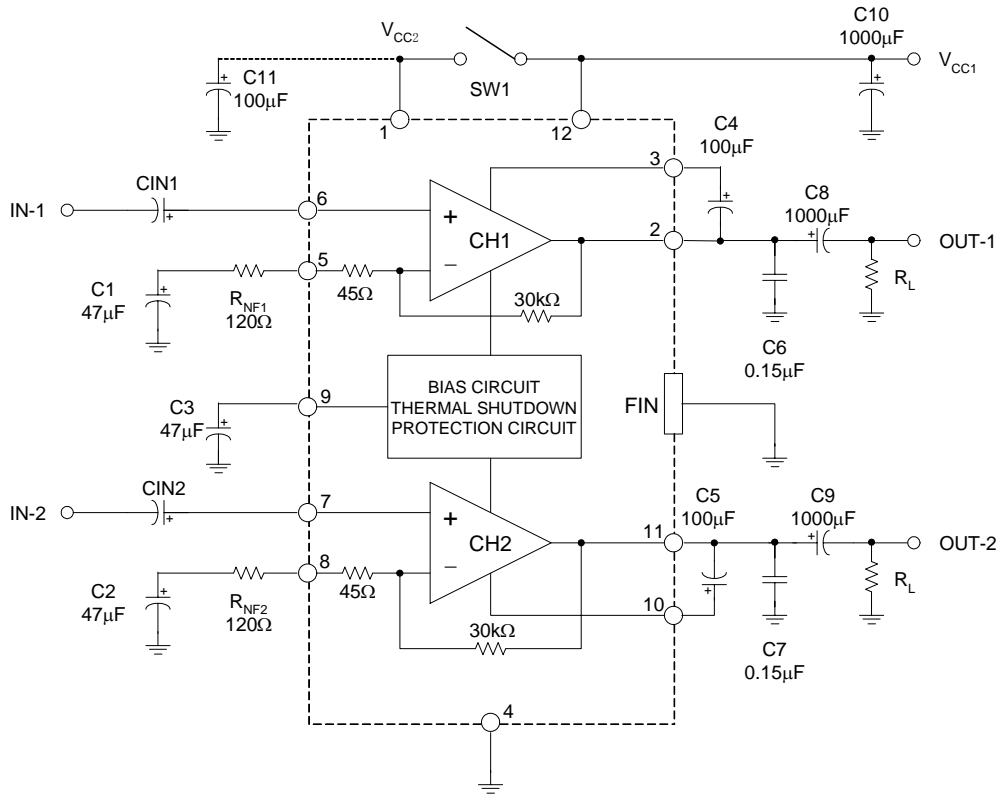


Figure 18. Application Circuit for AA8227




DUAL AUDIO POWER AMPLIFIER

AA8227

Mechanical Dimensions

HDIP-12

Unit: mm(inch)

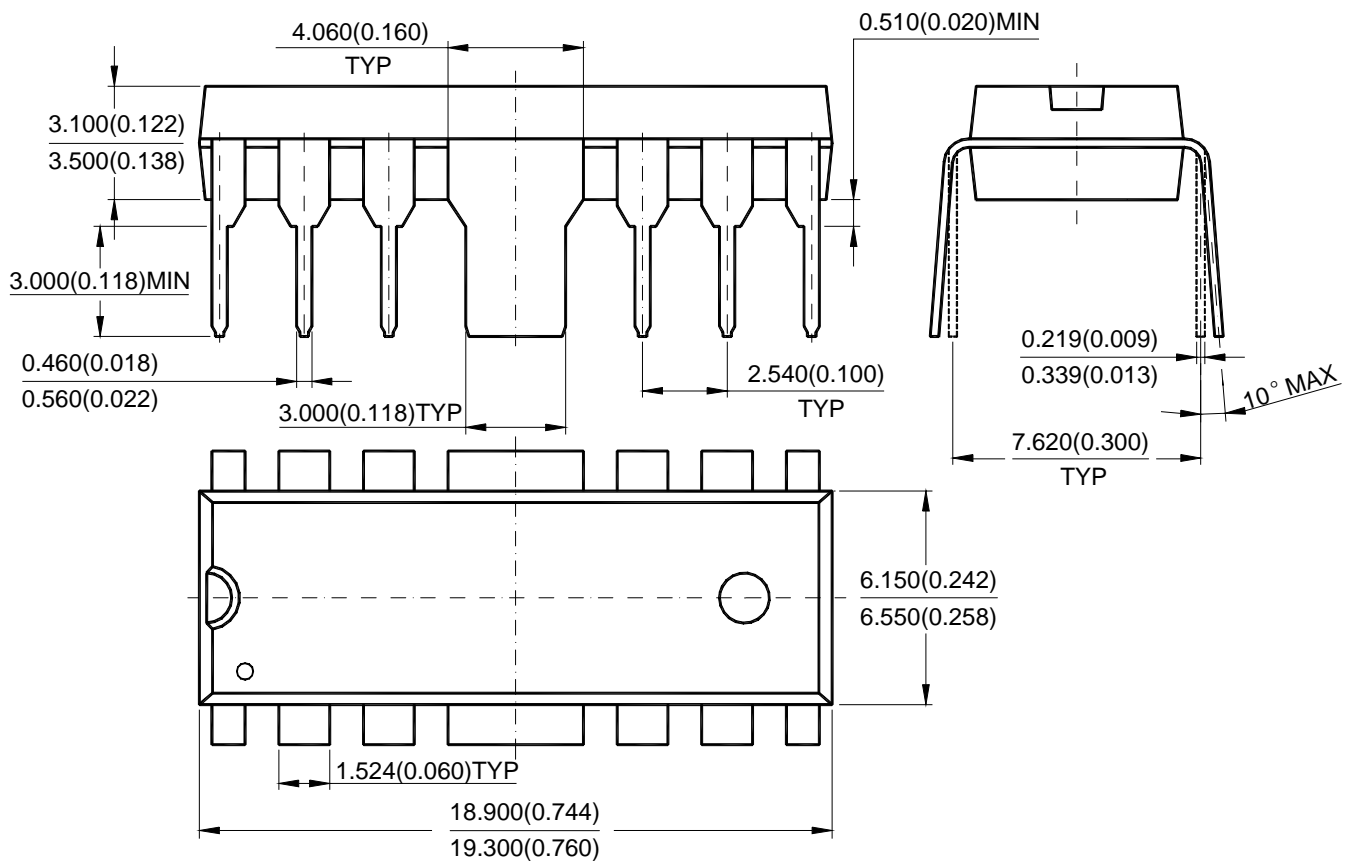



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

BCD Semiconductor Manufacturing Limited
- Wafer Fab
Shanghai SIM-BCD Semiconductor Manufacturing Limited
800, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

BCD Semiconductor Manufacturing Limited
- IC Design Group
Advanced Analog Circuits (Shanghai) Corporation
8F, Zone B, 900, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6495 9539, Fax: +86-21-6485 9673

REGIONAL SALES OFFICE

Shenzhen Office
Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd. Shenzhen Office
Advanced Analog Circuits (Shanghai) Corporation Shenzhen Office
27B, Tower C, 2070, Middle Shen Nan Road, Shenzhen 518031, China
Tel: +86-755-8368 3987, Fax: +86-755-8368 3166

Taiwan Office
BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,
Taiwan
Tel: +886-2-2656 2808, Fax: +886-2-2656 2806

USA Office
BCD Semiconductor Corporation
3170 De La Cruz Blvd., Suite 105, Santa Clara,
CA 95054-2411, U.S.A
Tel: +1-408-988 6388, Fax: +1-408-988 6386