



Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 (818) 701-4939 Fax:

2SC2482 2SC2482-O 2SC2482-Y

Features

- Halogen free available upon request by adding suffix "-HF" High Voltage: Vceo=300V
- Small collector output capacitance:Cob=3.0pF(Typ)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/Rohs Compliant ("P"Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	300	V
V_{CBO}	Collector-Base Breakdown Voltage	300	V
V_{EBO}	Emitter-Base Voltage	7.0	V
l _c	Collector Current	0.1	Α
P _C	Collector Power Dissipation	0.9	W
Tر	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	οС

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units		
OFF CHARAC	OFF CHARACTERISTICS					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage (I _C =3mAdc, I _B =0)	300		Vdc		
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage 300 (I _c =100μAdc, I _E =0)					
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage 7 $(I_E=100\mu\text{Adc}, I_C=0)$			Vdc		
I _{CBO}	Collector Cutoff Current $(V_{CB}=240Vdc, I_{E}=0)$		1.0	μAdc		
I _{CEO}	Collector Cutoff Current (V _{CB} =220Vdc, I _B =0)		5.0	μAdc		
I _{EBO}	Emitter Cutoff Current (V _{EB} =7Vdc, I _C =0)		1.0	μAdc		

ON CHARACTERISTICS

h _{FE(1)}	DC Current Gain	30	150	
	(I _C =20mAdc, V _{CE} =10Vdc)			
V _{CE(sat)}	Collector-Emitter Saturation Voltage		1.0 Vdc	
	(I _C =10mAdc, I _B =1mAdc)			
V_{BE}	Base-Emitter Saturation Voltage	1.0		Vdc
	$(I_C=10\text{mAdc}, I_B=1\text{mAdc})$			
Cob	Collector output capacitance V _{CB} =20V, I _E =0, f=1MHz	3 pF		pF


SMALL-SIGNAL CHARACTERISTICS

f	T	Transistor Frequency	50	 MHz
		$(I_C=20\text{mAdc}, V_{CE}=10\text{Vdc},$		
		f=30MHz)		

CLASSIFICATION OF H_{FE (1)}

Rank	0	Υ
Range	30-90	90-150

NPN **Epitaxial Silicon Transistor**

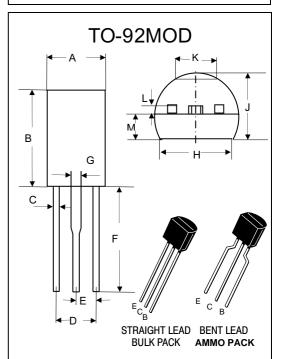


DIMENSIONS					
	INCHES MM				
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.228	.244	5.80	6.20	
В	.331	.346	8.40	8.80	
С	.016	.024	0.40	0.60	
D	.114	.122	2.90	3.10	Straight Lead
	.173	.220	4.40	5.60	Bent Lead
Е	.059		1.50		Straight Lead
_	.086	.110	2.20	2.80	Bent Lead
F	.543	.559	13.80	14.20	
G	.035	.043	0.90	1.10	
Н	.157		4.00	-	
J	.185	.201	4.70	5.10	
K		.063		1.60	
L	.016	.020	0.40	0.50	
М	.068	.080	1.73	2.03	


For ammo packing detailed specification, click here to visit our website of product packaging for details.


www.mccsemi.com


1 of 4


Micro Commercial Components

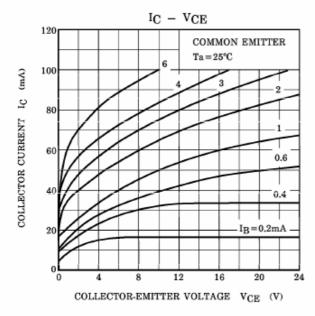


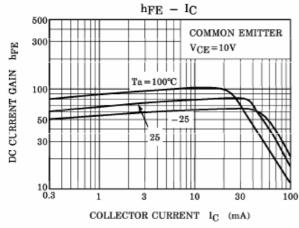

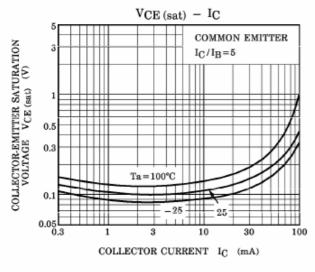

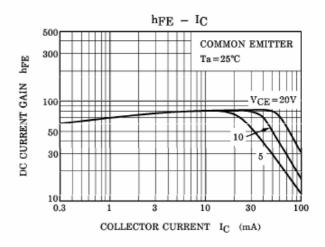

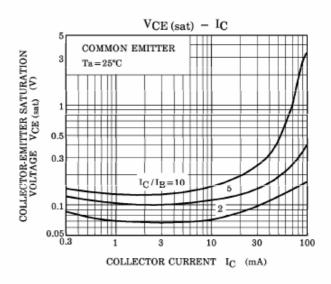


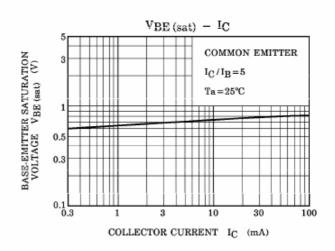






2SC2482

Micro Commercial Components

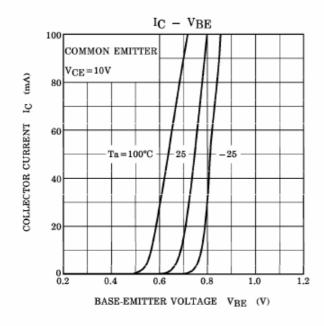

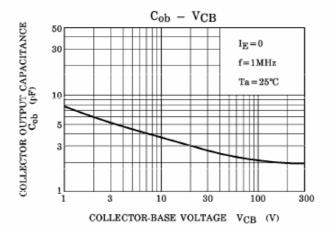

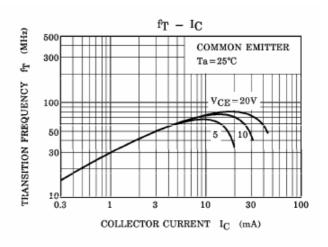

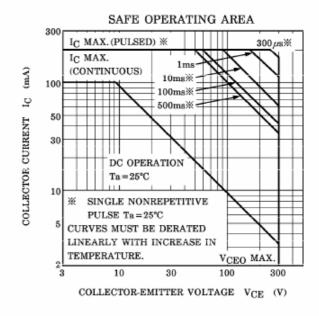



Micro Commercial Components

Ordering Information:

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 50Kpcs/Carton

Note: Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.