BAT54AW DIODE

SCHOTTKY BARRIER (DUAL) DIODES


■ DESCRIPTION


Planar Schottky barrier diodes are encapsulated in the SOT-323 small plastic SMD package. Single diodes and dual diodes with different pin configuration are available.

■ FEATURES

- * Low forward voltage
- * Guard ring protected
- * Small plastic SMD package

■ SYMBOL




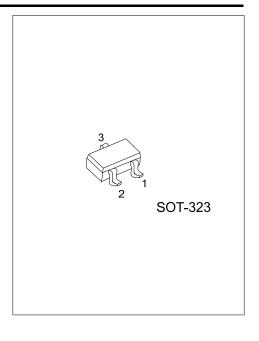


■ ORDERING INFORMATION

Ordering Number		Dookogo	Pin Assignment			Docking
Lead Free	Halogen Free	Package	1	2	3	Packing
BAT54AWL-AL3-R	BAT54AWG-AL3-R	SOT-323	K1	K2	A2A1	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

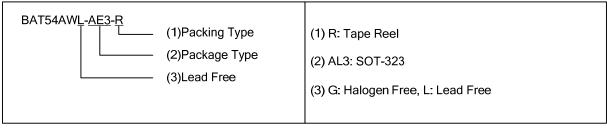

■ MARKING



www.unisonic.com.tw 1 of 3

BAT54AW DIODE

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT		
PER DIODE					
Continuous Reverse Voltage	V_R	30	V		
Continuous Forward Current	I _F	200	mA		
Repetitive Peak Forward Current (t _P <1s, δ≤0.5)	I _{FRM}	300	mA		
Non-repetitive Peak Forward Current (t _P <10ms)	I _{FSM}	600	mA		
Junction Temperature	TJ	+125	°C		
Storage Temperature	T _{STG}	-60 ~ +150	°C		
PER DEVICE					
Power Dissipation (T _A ≤25°C)	P _D	230	mW		

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		RATINGS	UNIT	
Junction to Ambient	θ_{JA}	625	°C/W	

■ **ELECTRICAL CHARACTERISTICS** (T_A = 25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
		$I_F = 0.1 \text{mA}$			240	mV
		I _F = 1mA			320	mV
Forward Voltage (See Fig.1)		I _F = 10mA			400	mV
		I _F = 30mA			500	mV
		I _F = 100mA			800	mV
Reverse Current (See Fig.2)	I _R	V _R = 25V			2	μΑ
Reverse Recovery Time (see Fig.4)		When switched from I_F =10mA to I_R = 10mA, R_L = 100 Ω measured at I_R = 1mA			5	ns
Diode Capacitance (see Fig.3)	C _D	f = 1 MHz, V _R = 1V;			10	pF

BAT54AW DIODE

■ TYPICAL CHARACTERISTICS

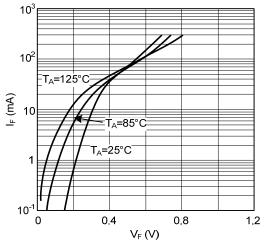


Fig.1 Forward current as a function of forward voltage; typical values.

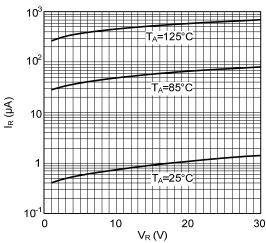


Fig.2 Reverse current as a function of reverse voltage; typical values.

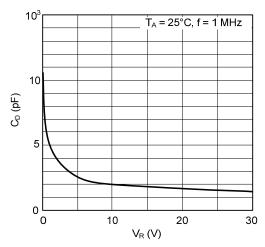


Fig.3 Diode capacitance as a function of reverse voltage; typical values.

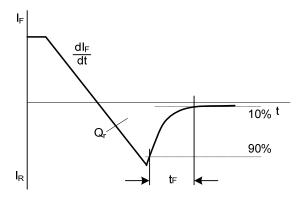


Fig.4 Reverse recovery definitions

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.