



BCP52/53

MEDIUM POWER AMPLIFIER

ADVANCE DATA

- SILICON EPITAXIAL PLANAR PNP TRANSISTORS
- MINIATURE PLASTIC PACKAGE FOR APPLICATION IN SURFACE MOUNTING CIRCUITS
- GENERAL PURPOSE MAINLY INTENDED FOR USE IN MEDIUM POWER INDUSTRIAL APPLICATION AND FOR AUDIO AMPLIFIER OUTPUT STAGE
- NPN COMPLEMENTS ARE BCP55 AND BCP56 RESPECTIVELY





ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Va	Unit	
		BCP52	BCP53	
V _{CBO}	Collector-Base Voltage (I _E = 0)	-60	-100	V
V _{CEO}	Collector-Emitter Voltage (I _B = 0)	-60	-80	V
V_{CER}	Collector-Emitter Voltage ($R_{BE} = 1K\Omega$)	-60	-100	V
V _{EBO}	Emitter-Base Voltage (I _C = 0)	-5		V
Ic	Collector Current	-1		Α
I _{CM}	Collector Peak Current (t _p < 5 ms)	-1.5		Α
Ι _Β	Base Current	-0.1		Α
I _{BM}	Base Peak Current (t _p < ms)	-0.2		А
P _{tot}	Total Dissipation at $T_c = 25$ °C 2		2	W
T _{stg}	Storage Temperature -65 to 150		o 150	°C
Tj	Max. Operating Junction Temperature		150	

October 1997 1/4

THERMAL DATA

R _{thj-amb} •	Thermal Resistance J	unction-Ambient Max	62.5	°C/W
R _{thj-tab} ●	Thermal Resistance J	unction-Collecor Tab Max	8	°C/W

Mounted on a ceramic substrate area = 30 x 35 x 0.7 mm

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
I _{CBO}	Collector Cut-off Current (I _E = 0)	$V_{CB} = -30 \text{ V}$ $V_{CB} = -30 \text{ V}$ $T_j = 125 ^{\circ}\text{C}$			-100 -10	nΑ μΑ
V _{(BR)CBO}	Collector-Base Breakdown Voltage (I _E = 0)	I _C = -100 μA for BCP52 for BCP53	-60 -100			V V
V _{(BR)CEO*}	Collector-Emitter Breakdown Voltage (I _B = 0)	I _C = -20 mA for BCP52 for BCP53	-60 -80			V V
V _(BR) CER	Collector-Emitter Breakdown Voltage (R _{BE} = 1 KΩ)	I _C = -100 μA for BCP52 for BCP53	-60 -100			V V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage (I _C = 0)	I _C = -10 μA	-5			V
V _{CE(sat)} *	Collector-Emitter Saturation Voltage	I _C = -500 mA I _B = -50 mA			-0.5	V
V _{BE(on)} *	Base-Emitter On Voltage	I _C = -500 mA V _{CE} = -2 V			-1	V
h _{FE} *	DC Current Gain	I _C = -5 mA	25 40 63 100 25		100 160 250	
f _T	Transition Frequency	$I_C = -10 \text{ mA } V_{CE} = -5 \text{ V} f = 35 \text{ MHz}$		50		MHz

^{*} Pulsed: Pulse duration = 300 μs, duty cycle ≤ 1.5 %



SOT-223 MECHANICAL DATA

DIM.	mm			mils			
Dimi	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
а	2.27	2.3	2.33	89.4	90.6	91.7	
b	4.57	4.6	4.63	179.9	181.1	182.3	
С	0.2	0.4	0.6	7.9	15.7	23.6	
d	0.63	0.65	0.67	24.8	25.6	26.4	
e1	1.5	1.6	1.7	59.1	63	66.9	
e4			0.32			12.6	
f	2.9	3	3.1	114.2	118.1	122.1	
g	0.67	0.7	0.73	26.4	27.6	28.7	
I1	6.7	7	7.3	263.8	275.6	287.4	
12	3.5	3.5	3.7	137.8	137.8	145.7	
L	6.3	6.5	6.7	248	255.9	263.8	

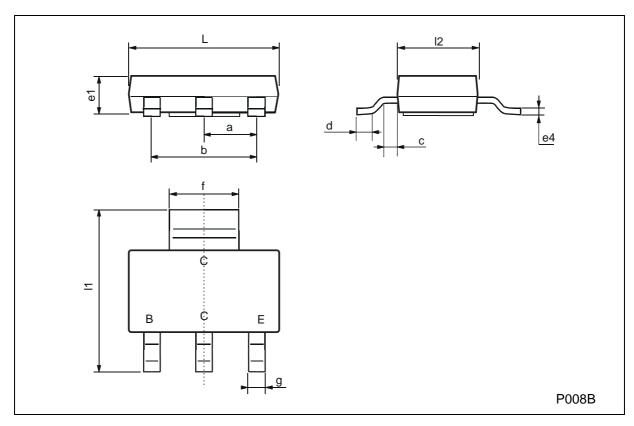

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

 $\hbox{@}$ 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A

