



DF339

3-Phase Brushless DC Motor Controller

Data Sheet

Version 0.00 – Jun. 28, 2017

IMPORTANT NOTICE

PADAUK Technology reserves the right to make changes to its products or to terminate production of its products at any time without notice. Customers are strongly recommended to contact PADAUK Technology for the latest information and verify whether the information is correct and complete before placing orders.

PADAUK Technology products are not warranted to be suitable for use in life-support applications or other critical applications. PADAUK Technology assumes no liability for such applications. Critical applications include, but are not limited to, those which may involve potential risks of death, personal injury, fire or severe property damage.

PADAUK Technology assumes no responsibility for any issue caused by a customer's product design. Customers should design and verify their products within the ranges guaranteed by PADAUK Technology. In order to minimize the risks in customers' products, customers should design a product with adequate operating safeguards.

Table of Contents

1. Key Features.....	5
2. DF339 Pin Assignment and Description.....	6
3. DC Characteristics	7
3.1. Absolute Maximum Ratings.....	7
4. Block Diagram.....	8
5. Functional Description.....	8
5.1. Main Control.....	8
5.2. Current Detector	8
5.3. Motor Sequence Control	8
5.4. Position Detector.....	9
5.5. Interface.....	9
6. Application Diagram	9
6.1. Reference Application Circuit.....	10
7. Package Marking Information.....	11
7.1. Marking Information	11
7.2. SSOP16 IC Drawing	11


Revision History:

Revision	Date	Description
0.00	2017/6/28	Preliminary version

1. Key Features

- Support 3-Phase brushless DC motor with hall IC interface
- Support PWM control input or voltage control input
- Support FG/RD/ALM/RALM/RXX/RRXX output
- Support close loop control and open loop control
- Support current limitation and current protection
- Support soft-start
- Support lock-protect and auto-restart
- Built-in internal RC clock oscillator
- 5V operating voltage

2. DF339 Pin Assignment and Description

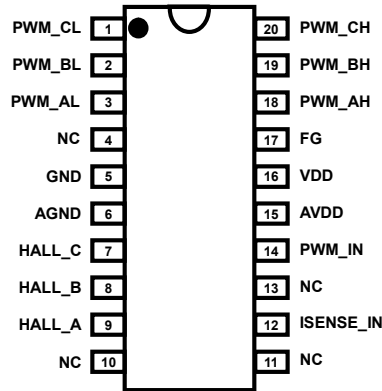

SSOP16 Pin No.	Pin Name	I/O	Description
1	PWM_CL	Output	C output signal to control the low side of motor driver
2	PWM_BL	Output	B output signal to control the low side of motor driver
3	PWM_AL	Output	A output signal to control the low side of motor driver
4	NC	-	No connection
5	GND	-	Ground
6	AGND	-	Analog Ground
7	HALL_C	Input	Digital input to sense motor position C
8	HALL_B	Input	Digital input to sense motor position B
9	HALL_A	Input	Digital input to sense motor position A
10	NC	-	No connection
11	NC	-	No connection
12	ISENSE_IN	Input	Analog input to sense motor current
13	NC	-	No connection
14	PWM_IN	Input	PWM control input
15	AVDD	-	Analog Positive power
16	VDD	-	Positive power
17	FG	Output	Rotation speed detection
18	PWM_AH	Output	A output signal to control the high side of motor driver
19	PWM_BH	Output	B output signal to control the high side of motor driver
20	PWM_CH	Output	C output signal to control the high side of motor driver


3. DC Characteristics

Symbol	Description	Min.	Typ	Max.	Unit	Conditions (Ta=25 °C)
V _{DD}	Operating Voltage	4.75	5.0	5.25	V	
I _{OP}	Operating Current		10		mA	
V _{IL}	Input low voltage for IO lines	0		0.3V _{DD}	V	
V _{IH}	Input high voltage for IO lines	0.7 V _{DD}		V _{DD}	V	
I _{OL}	IO lines sink current		10		mA	V _{DD} =5.0V, V _{OL} =0.5V
I _{OH}	IO lines drive current		-7		mA	V _{DD} =5.0V, V _{OH} =4.5V
R _{PH}	Pull-high Resistance		100		KΩ	V _{DD} =5.0V
V _{BRD}	Brown-out Detect Voltage		3.5		V	After DF339 configuration
V _{POR}	Power-On Reset Voltage		2		V	
θ _{ja}	Thermal resistance from junction to ambient		75		°C/W	
θ _{jc}	Thermal resistance junction to top of case		25		°C/W	

3.1. Absolute Maximum Ratings

- Supply Voltage 4.75V ~ 5.25V
- Input Voltage -0.3V ~ V_{DD} + 0.3V
- Operating Temperature -20 °C ~ 70 °C
- Storage Temperature -50 °C ~ 125 °C

4. Block Diagram

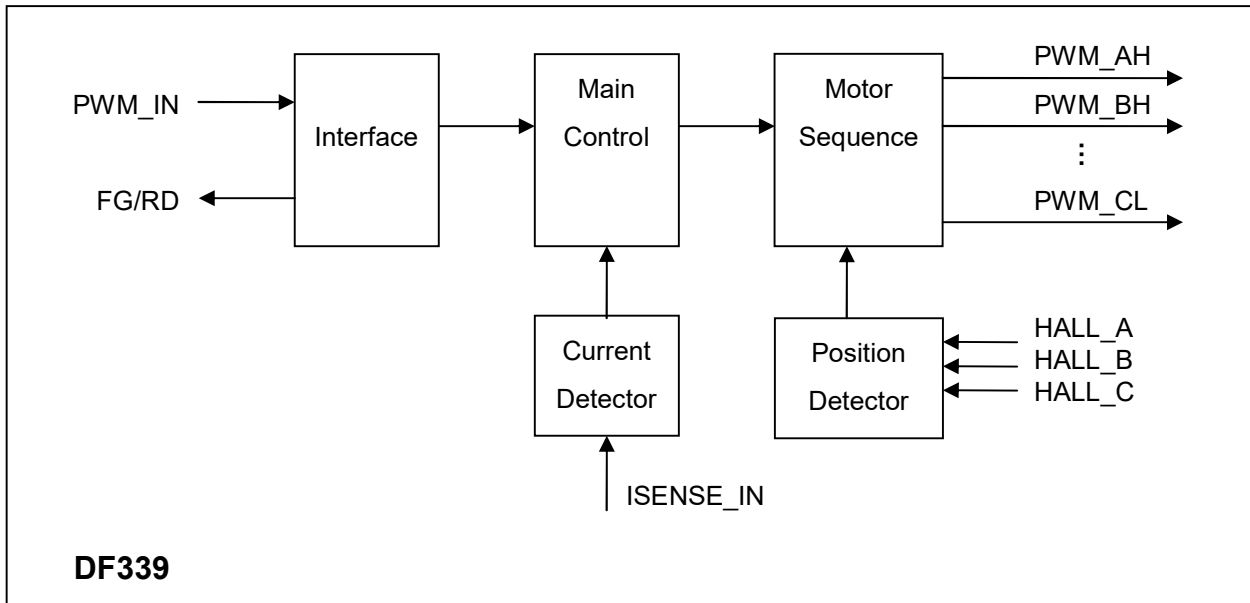

5. Functional Description

DF339 is a controller which is target for 3-phase brushless DC motor with hall sensor; there are five functional modules inside the DF339: Main Control, Current Detector, Motor Sequence Control, Position Detector and Interface. Its functional descriptions are shown as below:

5.1. Main Control

This Main Control module is coordinator to maintain the finite state of the system. It receives the command passed by user interface detector and motor current from current detector module, and then determines the next action for motor based on those two received conditions.

5.2. Current Detector

This module is used to detect the feedback current of motor (ISENSE_IN) and send to main control module, the main control will stop the motor whenever the sensing current reaches the value corresponding to over current protection.

5.3. Motor Sequence Control

The motor sequence control module controls the power MOSFET ON/OFF of motor. It depends on the position information sent by position detector module to output the six driving signals (PWM_AH, PWM_AL, PWM_BH, PWM_BL, PWM_CH, and PMW_CL) that can be directly associated to the sequence phase of motor.


5.4. Position Detector

This module is used to detect the feedback hall signals of motor (HALL_A, HALL_B, and HALL_C) and send to motor sequence control module, the sequence control module will decide the next sequence phase to drive the motor.


5.5. Interface

This module is used to detect the user interface, including PWM input and FG output.

6. Application Diagram

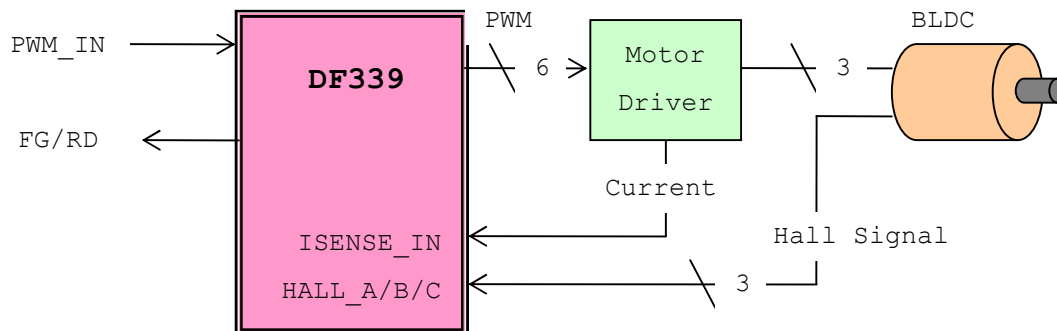


6.1. Reference Application Circuit

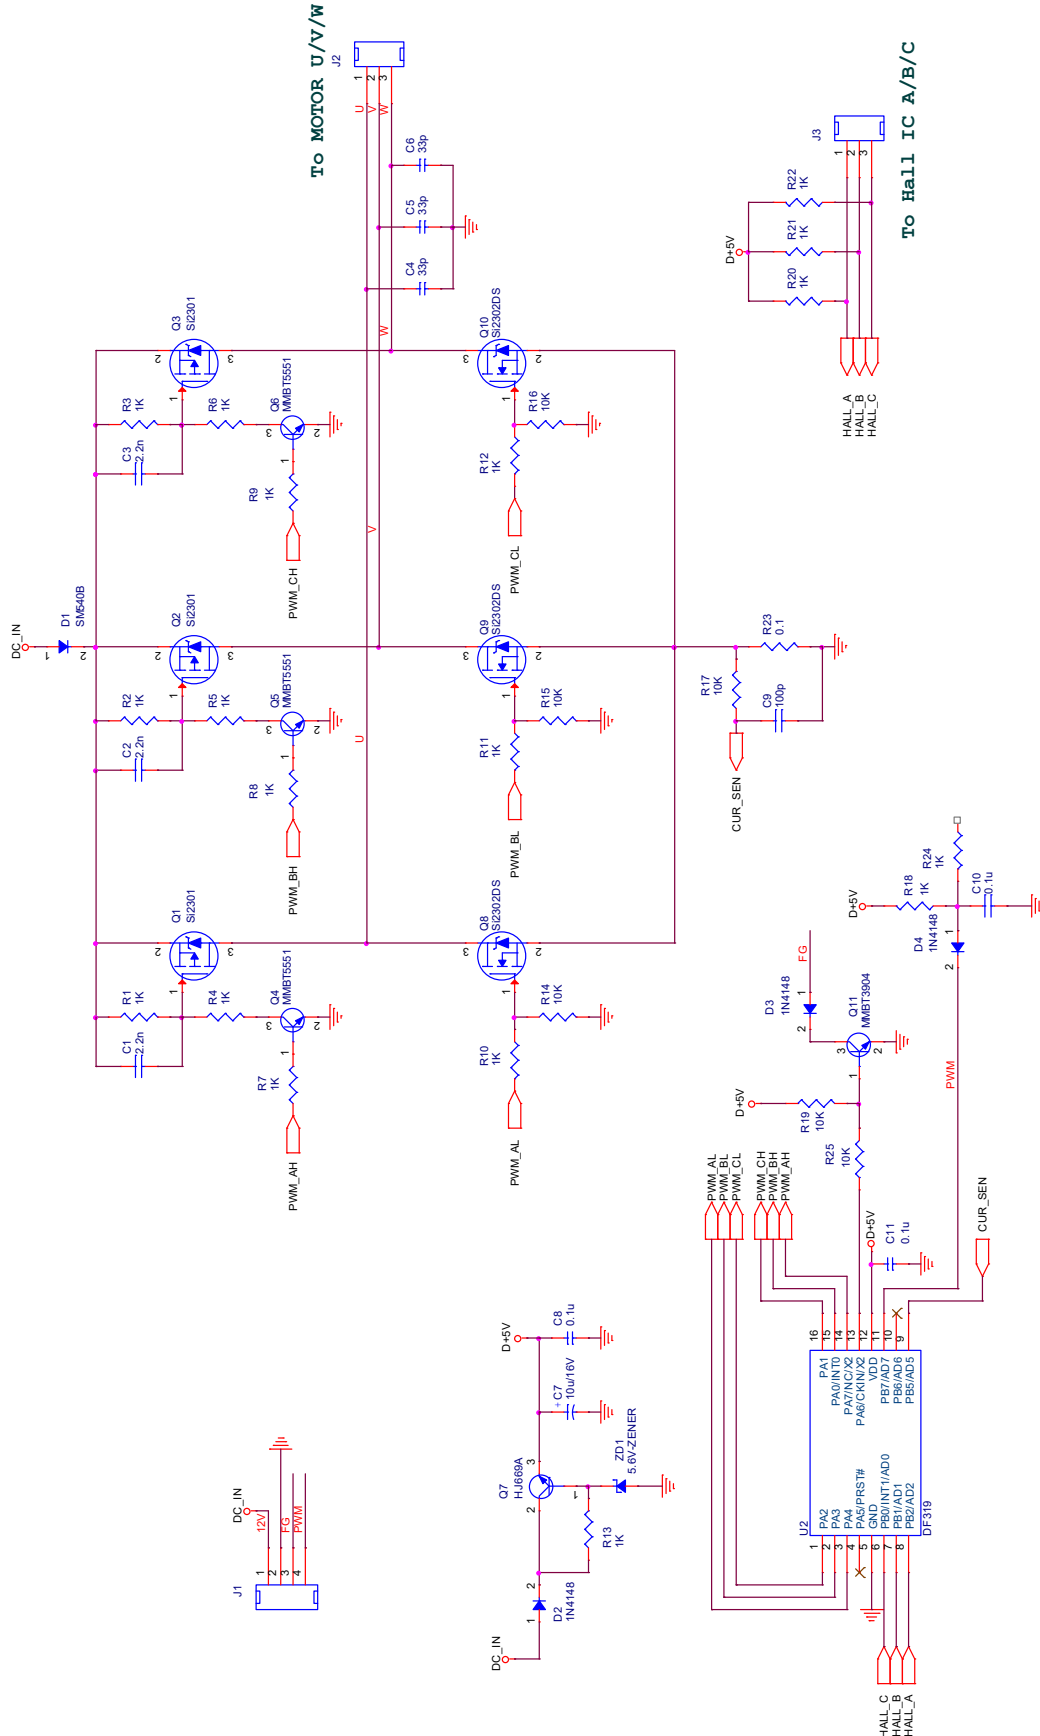


7. Package Marking Information

7.1. Marking Information

Top View

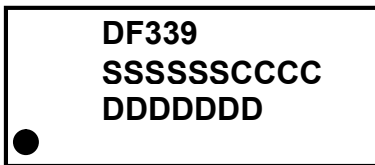


Example

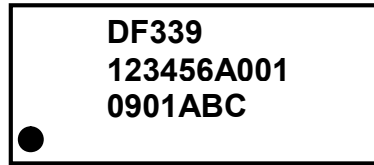

Legend:

DF339	PADAUK Technology part number information
SS...S	Lot number information
CCCC	Customer product serial number
DD...D	Date Code

7.2. SSOP20 IC Drawing

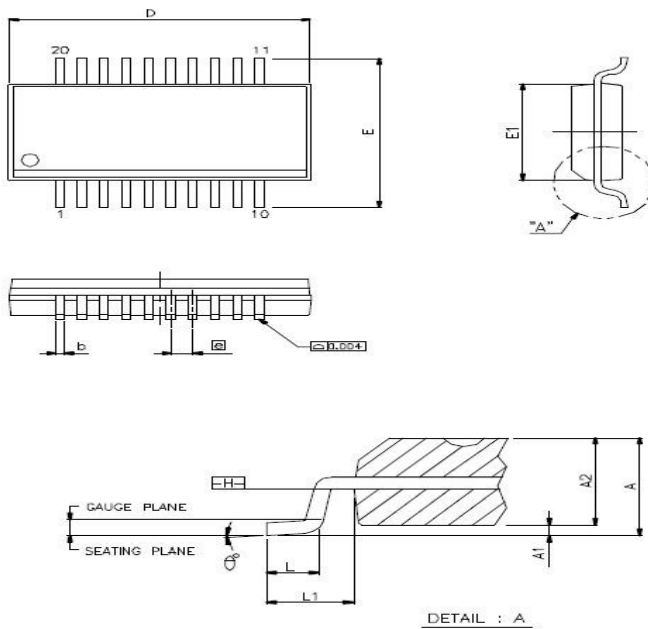

SYMBOLS	MIN.	NOM.	MAX.
A	0.053	0.064	0.069
A1	0.004	0.006	0.010
A2	—	—	0.059
b	0.008	—	0.012
C	0.007	—	0.010
D	0.337	0.341	0.344
E	0.228	0.236	0.244
E1	0.150	0.154	0.157
e	0.025 BASIC		
L	0.016	0.025	0.050
L1	0.041 BASIC		
θ°	0°	—	8°

UNIT : INCH

NOTES:

1. JEDEC OUTLINE : MO-137 AD
2. DIMENSION D DOES NOT INCLUDE MOLD PROTRUSIONS OR GATE BURRS. MOLD PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.006" PER SIDE. DIMENSION E1 DOES NOT INCLUDE INTERLEAD MOLD PROTRUSIONS. INTERLEAD MOLD PROTRUSIONS SHALL NOT EXCEED 0.010" PER SIDE.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.004" TOTAL IN EXCESS OF b DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION b BY MORE THAN 0.002" AT LEAST.