

# ET16-6T-SM1

E-Series RF 16:1 Transformer  
0.06 – 60 MHz

V1


## Features

- 16:1 Impedance Ratio
- CT on Secondary
- Surface Mount
- Tape and reel packaging available

## Description

M/A-COM's ET16-6T-SM1 is a 16:1 RF transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. Parts are packaged in tape & reel.

## SM - 1 Package

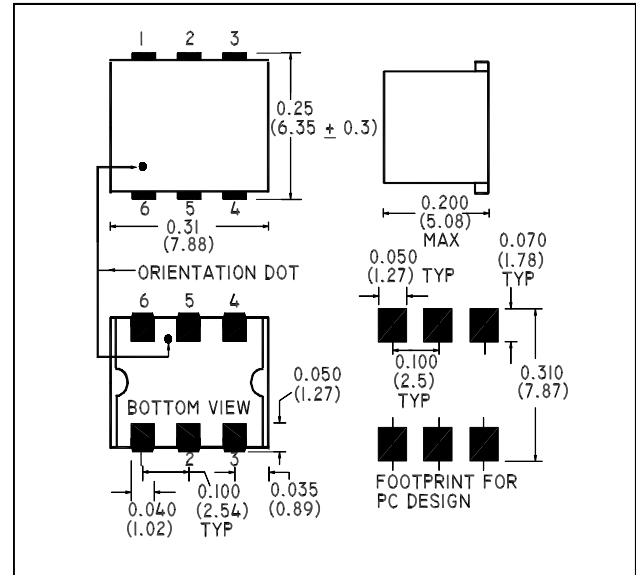

## Electrical Specifications: $T_A = 25^\circ\text{C}$ , $Z_0 = 50\Omega$ <sup>1</sup>

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	0.06 - 60	MHz	—	—	—
Insertion Loss	$F_L - f_U$	0.06 - 60	dB	—	—	3.0
		0.08 - 40	dB	—	—	2.0
		0.15 - 15	dB	—	—	1.0
Amplitude Unbalance	$F_L - f_U$	0.06 - 30	dB	—	—	0.3
		0.06 - 60	dB	—	—	0.6
Phase Unbalance	$F_L - f_U$	0.06 - 20	Degrees	—	—	1°
		0.06 - 60	Degrees	—	—	4°

## Absolute Maximum Ratings<sup>1</sup>

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

## Ordering Information

Part Number	Package
ET16-6T-SM1TR	Tape and Reel (900 piece Reel)

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# ET16-6T-SM1



E-Series RF 16:1 Transformer  
0.06 – 60 MHz

V1

## Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Not Connected
6	Primary

## Schematic

