



**DAYA**  
臺源國際股份有限公司

## TO-92 Plastic-Encapsulate Transistors

78L09

**CJ78L09** Three-terminal positive voltage regulator


### FEATURES

Maximum Output current

$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : 9 V

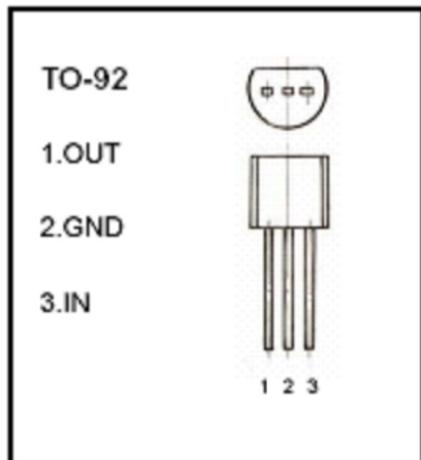

### ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{JOPR}$	0→+125	°C
Storage Temperature Range	$T_{STO}$	-55→+150	°C

### ELECTRICAL CHARACTERISTICS( $V_I=16V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_1=0.33\mu F, C_0=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^\circ C$	8.64	9.0	9.36	V
		$12V \leq V_I \leq 24V, I_O=1mA-40mA$	8.55	9.0	9.45	V
		$I_O=1mA-70mA$	8.55	9.0	9.45	V (note)
Load Regulation	$\Delta V_o$	$T_J=25^\circ C, I_O=1mA-100mA$	19	90		mV
		$T_J=25^\circ C, I_O=1mA-40mA$	11	40		mV
Line regulation	$\Delta V_o$	$12V \leq V_I \leq 24V, T_J=25^\circ C$	45	175		mV
		$13V \leq V_I \leq 24V, T_J=25^\circ C$	40	125		mV
Quiescent Current	$I_Q$		4.1	6.0		mA
Quiescent Current Change	$\Delta I_Q$	$13V \leq V_I \leq 24V$			1.5	mA
	$\Delta I_Q$	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		58		uV
Ripple Rejection	$RR$	$15V \leq V_I \leq 24V, f=120Hz, T_J=25^\circ C$		45		dB
Dropout Voltage	$V_d$	$T_J=25^\circ C$		1.7		V

### TYPICAL APPLICATION

