


PNP Transistors

FZT789A (KZT789A)

■ Features

- Low equivalent on-resistance; $R_{CE(sat)}$ 93m Ω at 3A.
- Gain of 300 at $I_c=2$ Amps and Very low saturation voltage.

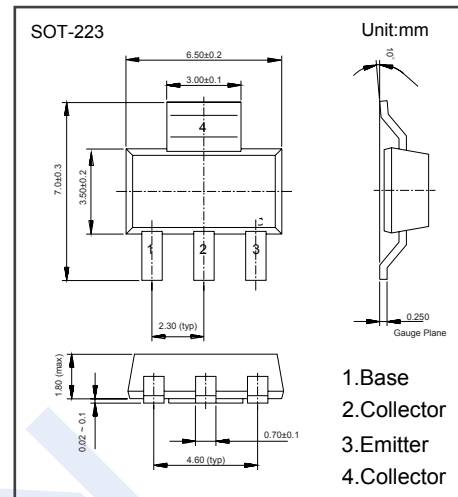

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	-25	V
Collector - Emitter Voltage	V_{CEO}	-25	
Emitter - Base Voltage	V_{EBO}	-5	
Collector Current - Continuous	I_c	-3	A
Peak Pulse Current	I_{CM}	-6	
Collector Power Dissipation	P_C	2	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature range	T_{stg}	-55 to 150	

FZT789A (KZT789A)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Breakdown Voltages	V(BR)CBO	Ic=-100uA	-25	-40		V
Breakdown Voltages *	V(BR)CEO	Ic=-10mA	-25	-35		V
Breakdown Voltages	V(BR)EBO	IE=-100uA	-5	-8.5		V
Collector Cut-Off Current	IcBO	V _{CB} =-15V V _{CB} =-15V, Ta = 100°C			-0.1 10	uA
Emitter Cut-Off Current	IEBO	VEB=-4V			-0.1	uA
Saturation Voltages *	V _{CE(sat)}	Ic=-1A, I _B =-10mA Ic=-2A, I _B =-20mA Ic=-3A, I _B =-100mA		-0.15 -0.30 -0.30	-0.25 -0.45 -0.50	V
Saturation Voltages *	V _{BE(sat)}	Ic=-1A, I _B =-10mA		-0.8	-1.0	V
Base-Emitter Turn-On Voltage *	V _{BE(on)}	Ic=-1A, V _{CE} =-2V		-0.8		V
Static Forward Current Transfer Ratio	h _{FE}	Ic=-10mA, V _{CE} =-2V	300		800	
		Ic=-1A, V _{CE} =-2V*	250			
		Ic=-2A, V _{CE} =-2V*	200			
		Ic=-6A, V _{CE} =-2V*	100			
Transitional frequency	f _T	Ic=-50mA, V _{CE} =-5V, f=50MHz	100			MHz
Input capacitance	C _{ibo}	VEB=-0.5V, f=1MHz		225		pF
Output capacitance	C _{obo}	V _{CB} =-10V, f=1MHz		25		pF
Turn-on time	t _(on)	Ic=-500mA, V _{CC} =-10V		35		ns
Turn-off time	t _(off)	I _{B1} =I _{B2} =-50mA		400		ns


* Pulse test: t_p = 300 us; d ≤ 0.02.

■ Marking


Marking	FZT789A
---------	---------

FZT789A (KZT789A)


■ Typical Characteristics

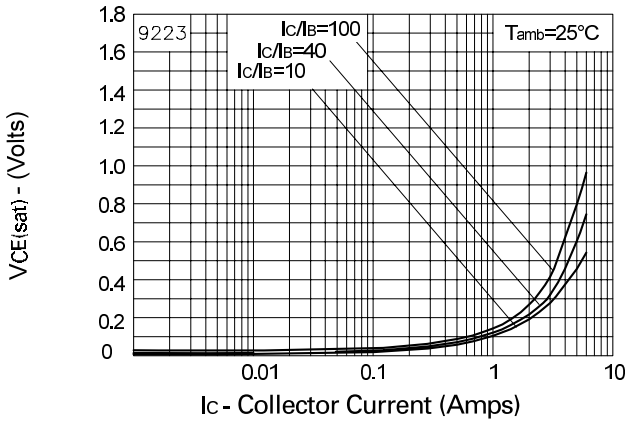


VCE(sat) v IC

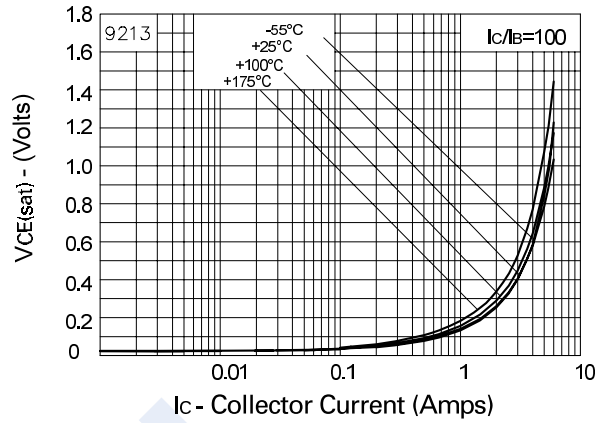


VCE(sat) v IC

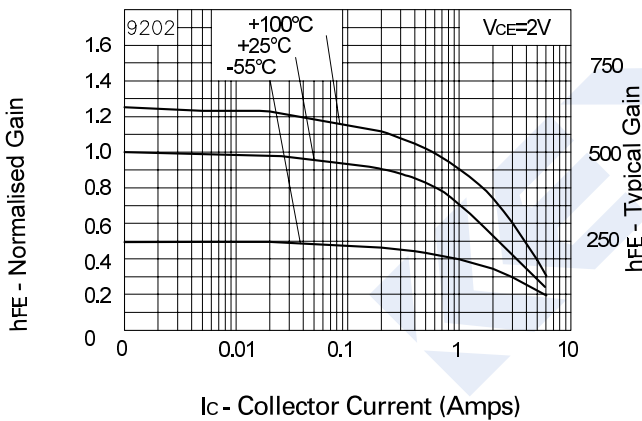


hFE v IC

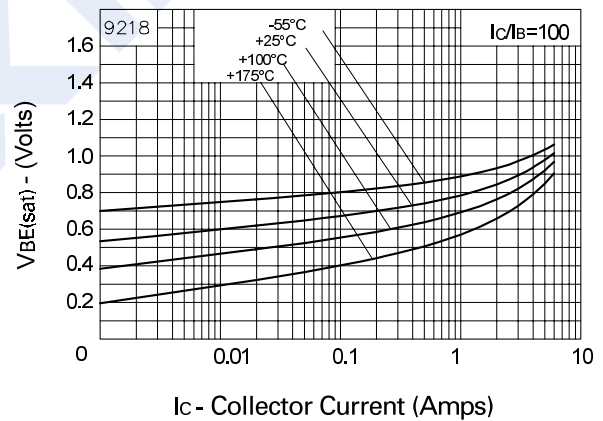

VBE(sat) v IC

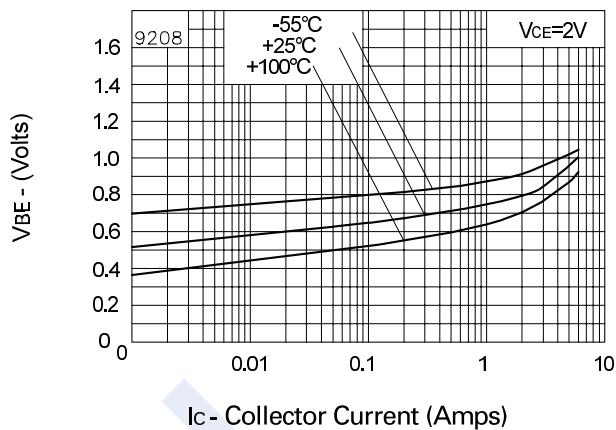

VBE(on) v IC

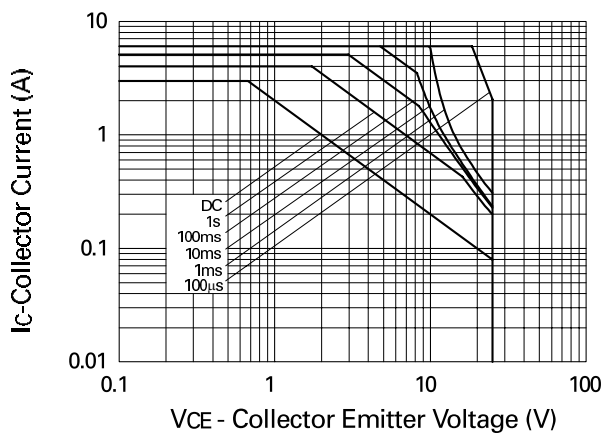

Safe Operating Area