


#### 6-PIN DIP PHOTOCOUPLER SCHMITT TRIGGER

Feature:	Certification & Compliance:
High data rate, 1MHz typ. (NRZ) Microprocessor compatible drive Free from latch up and oscillation throughout voltage and temperature ranges Wide supply voltage capability, compatible with all popular logic systems High Isolation voltage between input and output (Viso = 5300V rms) Logic compatible output sinks 16mA at 0.4V max. Guaranteed on/off threshold hysteresis Current transfer ration (CTR: 50~600% at $I_F = 5mA$ , $V_{CE} = 5V$ ) (CTR: 40~320% at $I_F = 10mA$ , $V_{CE} = 5V$ ) Compact Dual-in-Line Package Available packaged in Tube or Tape and reel Conventional black housing package	<ul> <li>Pb free and RoHS Compliant</li> <li>UL approved (E338132)</li> <li>cUL approved (E338132)</li> </ul>
chematic:	1
Schematic	1. Anode 2. Cathode 3. No Connection 4. Vo 5. GND 6. Vcc
Truth Table	
Input C H L	Dutput L H
Product: H111 1 H111 2 H111 3	Date: April 07 2011 Page 1 of 12

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 1 of 12
	Version# 1.1	




#### 6-PIN DIP PHOTOCOUPLER SCHMITT TRIGGER

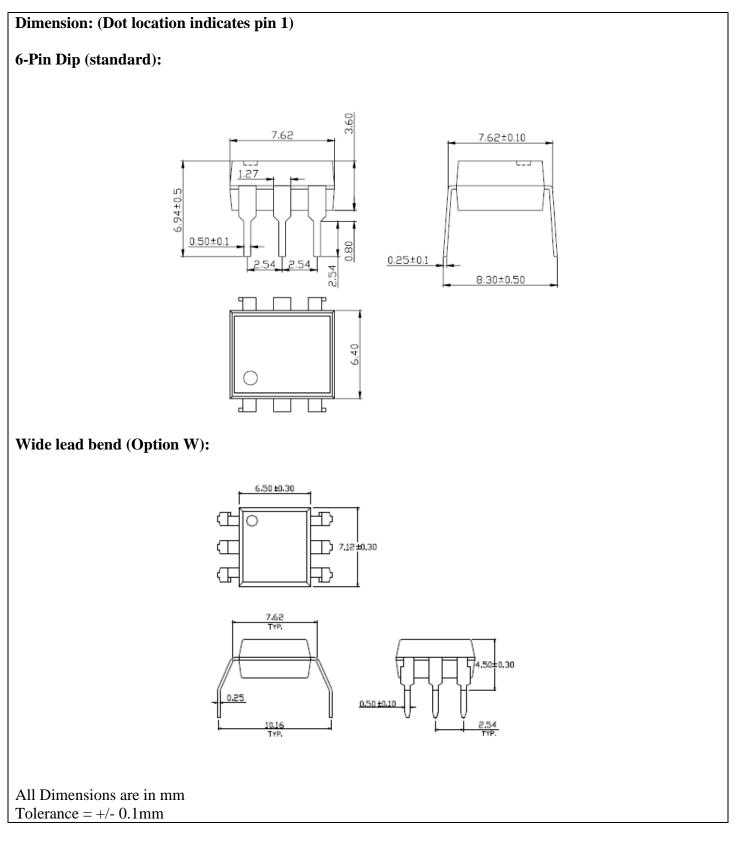

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 2 of 12
	Version# 1.1	



6-PIN DIP PHOTOCOUPLER SCHMITT TRIGGER

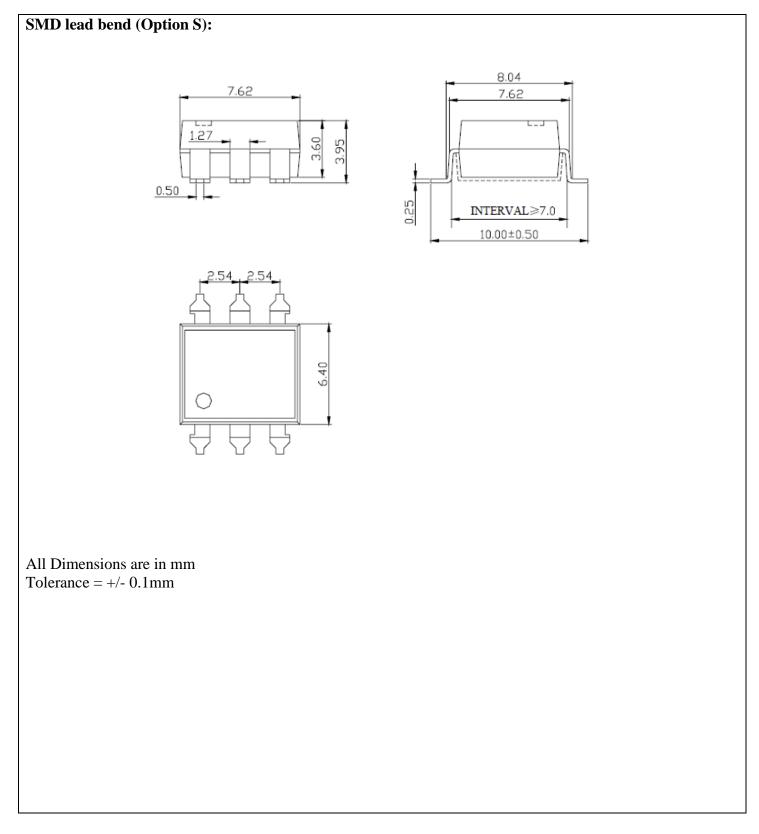

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 3 of 12
	Version# 1.1	



### **Absolute Maximum Rating:**

		Rating	
Symbol	Parameter	H11L1 H11L2 H11L3	Units
T <sub>STG</sub>	Storage Temperature	-55 ~ +150	°C
T <sub>OPR</sub>	Operating Temperature	-40 ~ +85	℃
T <sub>SOL</sub>	Lead Solder Temperature	260	°C
P <sub>TOT</sub>	Total Power Dissipation	250	mW
EMITTER			
I <sub>F</sub>	Continuous Forward Current	60	mA
I <sub>PF</sub>	Peak Forward Current (300us pulse, 2% Duty Cycle	1.2	A
V <sub>R</sub>	Reverse Voltage	5	V
P <sub>D</sub>	Power Dissipation	100	mW
DETECTOR			
Vo	V <sub>45</sub> Allowed Range	0 to 16	V
V <sub>cc</sub>	V 65 Allowed Range	3 to 16	V
Ι <sub>ο</sub>	Output Current	50	mA
В	Collector Power Dissipation	150	mW
P <sub>D</sub>	Derate above 25 °C	2	mW/ ⁰C

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 4 of 12
	Version# 1.1	



### **Electrical Characteristic:** (T=25 °C)

Emitter	````						
Symbol	Characteristic	Device	Test Condition		Range		Unit
Symbol	Characteristic	Device		Min	Тур	Max	Onic
		H11L1					
V <sub>F</sub>	Forward voltage	H11L2	$I_F = 10 \text{mA}$	-	1.2	1.5	V
		H11L3					
		H11L1					
I <sub>R</sub>	Reverse current	H11L2	$V_R = 3V$	-	-	10	μA
		H11L3					
		H11L1					
C <sub>J</sub>	Capacitance	H11L2	V = 0, f = 1 KHz	-	-	100	pF
		H11L3					

#### Detector

Symbol	Characteristic	Device	Test Condition		Range		Unit
Symbol	Characteristic	Device		Min	Тур	Max	Offic
		H11L1					
V <sub>CC</sub>	Operation Voltage Range	H11L2		3	-	15	V
		H11L3					
		H11L1					
I <sub>CC(off)</sub>	Supply Current	H11L2	$I_F = 0mA, V_{CC} = 5v$	-		3	mA
		H11L3					
		H11L1	I = 0mA V = V				
I <sub>CH</sub>	Output Current, High	H11L2	$I_F = 0mA, V_{CC} = V_O$ = 15V	-	-	100	V
		H11L3	- 13 V				

#### **Isolation Characteristics**

R	SO	Isolation Resistance	H11L1 H11L2 H11L3	V <sub>I-O</sub> = 500VCD	10 <sup>11</sup>	-	-	Ω
VI	SO	Isolation Voltage		Ioff<0.3mA, AC, 60s	5300			Vrms

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 5 of 12
	Version# 1.1	



#### 6-PIN DIP PHOTOCOUPLER SCHMITT TRIGGER

Symbol	Characteristic	Device	Device Test Condition Range		Range		Unit
Symbol	Characteristic	Device		Min	Тур	Max	Onit
DC Trans	sfer Characteristic						
		H11L1					
I <sub>CC(on)</sub>	Supply Current	H11L2	$I_{\rm F} = 10 {\rm mA}, V_{\rm CC} = 5 {\rm V}$	-	1.6	5	mA
		H11L3					
	Output Voltage	H11L1	$V_{CC} = 5V, I_F = I_{FON}(max),$				
V <sub>OL</sub>	.low	H11L2	$R_{\rm L} = 270\Omega$	-	0.2	0.4	V
	.10 w	H11L3	$\mathbf{K} = 27032$				
		H11L1		_	1.2	1.6	mA
	-						
т	Turn on Threshold	H11L2	M = 5M R = 2700	-		10	mA
I <sub>FON</sub>	Current <sup>1</sup>	1111122	$V_{CC} = 5V, R_L = 270\Omega$	-	-	10	IIIA
	-					_	
		H11Ll3		-	-	5	mA
I <sub>FOFF</sub>	Turn off Threshold	H11L1					
		H11L2	$V_{CC} = 5V, R_L = 270\Omega$	0.3	0.75	-	mA
	Current	H11L3					
$I_{fon}/I_{foo}$	Hysteresis Ratio	H11L1					
		H11L2	$V_{CC} = 5V, R_L = 270\Omega$	0.5	-	0.9	
		H11L3					
AC Trans	sfer Characteristic						
		H11L1	V SVI I				
Ton	Turn on Time	H11L2	$V_{CC} = 5V, I_F = I_{FON},$	-	1.2	4	μS
		H11L3	$R_L = 270\Omega$				
		H11L1	V SVI I				
Tr	Rise Time	H11L2	$V_{CC} = 5V, I_F = I_{FON},$	-	0.1	-	μS
		H11L3	$R_L = 270\Omega$				
		H11L1	V 5V I I				
$T_{\rm off}$	Turn off Time	H11L2	$V_{CC} = 5V, I_F = I_{FON},$	-	1.2	4	μS
		H11L3	$R_L = 270\Omega$				
		H11L1					
Tf	Fall Time		$V_{CC} = 5V, I_F = I_{FON}, \\ R_L = 270\Omega$	-	0.1	-	μS
		H11L3					'
		H11L1					
	Data Rate	H11L2		-	1	-	MHz
		H11L3			_		


<sup>1</sup>. Max.  $I_{F(on)}$  is the maximum current required to trigger the output. For examples, a 1.6mA maximum trigger current would require the LED to be driven at a current greater than 1.6mA to guarantee the device will turn on. A 10% guard band is recommended to account for degradation of the LED over its lifetime. The maximum allowable LED drive current is 60mA

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 6 of 12
	Version# 1.1	



#### 6-PIN DIP PHOTOCOUPLER SCHMITT TRIGGER


### **Characteristic Curves:**

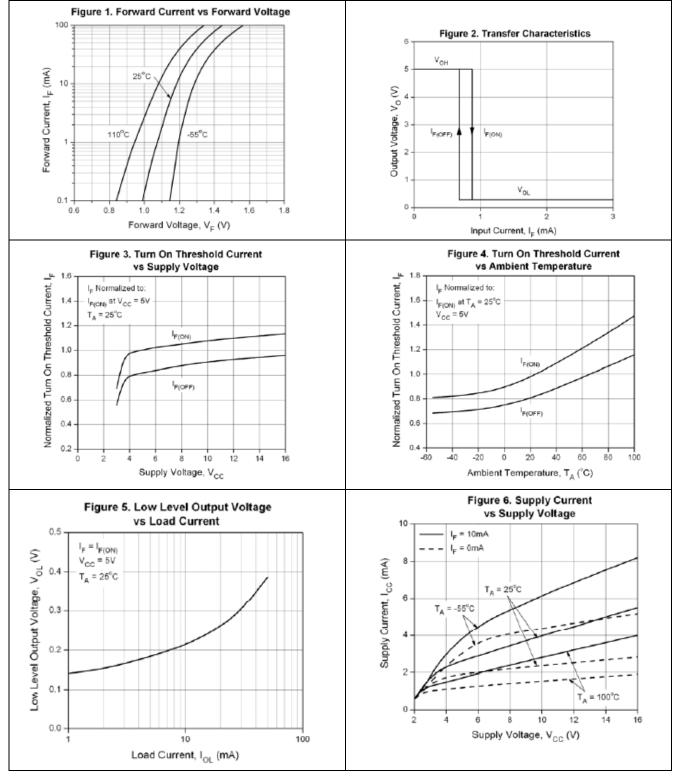


Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 7 of 12
	Version# 1.1	



# **Test Circuit for Response Time:**

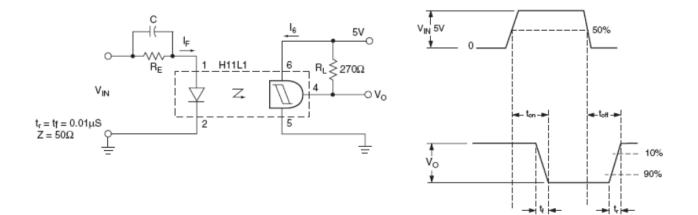


# Solder Reflow temperature Profile:

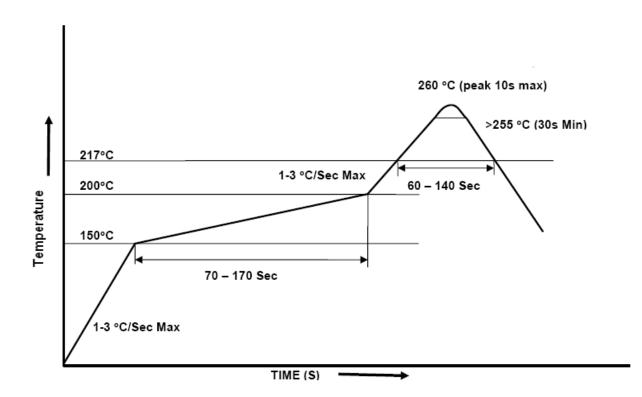


Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 8 of 12
	Version# 1.1	



# **Solder Profile & Footprint:**

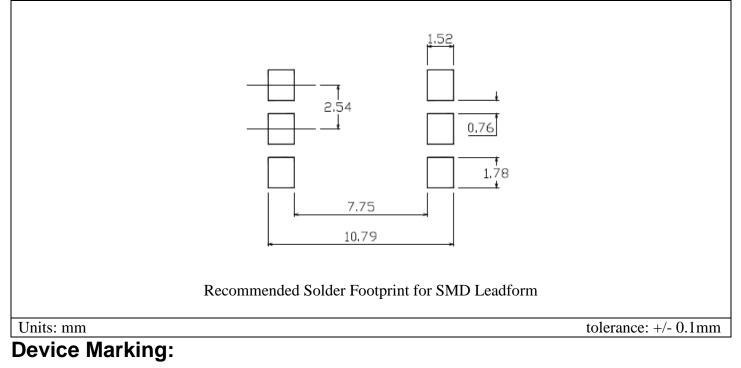

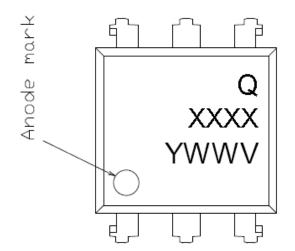


Q = QT-Brightek Corporation XXXX = H11L1, H11L2, or H11L3 Y = Year WW = Week

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 9 of 12
	Version# 1.1	




# **Tape and Reel Packing Specifications:**

# **Tape Dimensions:**

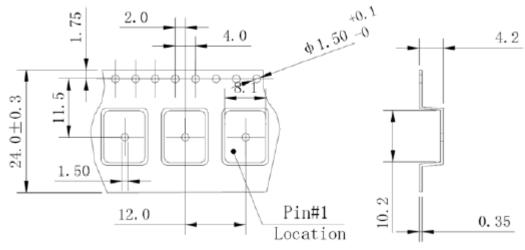

# **Reel Dimensions:**

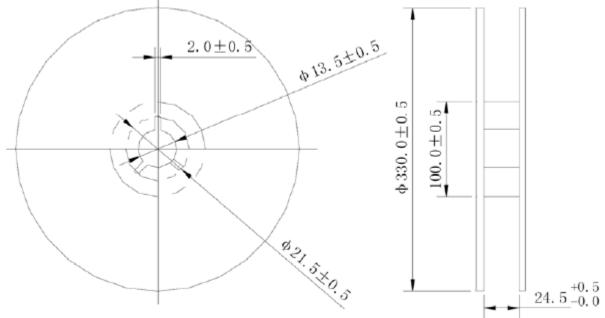

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 10 of 12
	Version# 1.1	



### Ordering Information:

Part Number	Orderable Part Number	Options	Description	Quantity per packing
	H11L1	None	Standard 6 pin	60pcs / Tube
H11L1	H11L1W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
	H11L1STA	S	SMD lead form with tape and reel option	1000pcs / Tube
	H11L2	None	Standard 6 pin	60pcs / Tube
H11L2	H11L2W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
H11L2ST	H11L2STA	S	SMD lead form with tape and reel option	1000pcs / Tube
	H11L3	None	Standard 6 pin	60pcs / Tube
H11L3	H11L3W	W	Wide lead bend (0.4 inch spacing)	60pcs / Tube
	H11L3STA	S	SMD lead form with tape and reel option	1000pcs / Tube

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 11 of 12
	Version# 1.1	



#### **Revision History:**

Description:	Revision #	Revision Date
Initial release of H11L1 H11L2 H11L3	1.0	4/22/2010
Information updates	1.1	04/07/2011

### Disclaimer

QT-BRIGHTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

### **Life Support Policy**

QT-BRIGHTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.

2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Product: H11L1 H11L2 H11L3	Date: April 07, 2011	Page 12 of 12
	Version# 1.1	