

# HD74HCT374, HD74HCT534

Octal D-type Flip-Flops (with 3-state outputs)

Octal D-type Flip-Flops (with inverted 3-state outputs)

REJ03D0667-0200  
 (Previous ADE-205-556)  
 Rev.2.00  
 Mar 30, 2006

## Description

These device are positive edge triggered flip-flops. The difference between HD74HCT374 and HD74HCT534 is only that the former is a true outputs and the latter is a false outputs. Data at the D inputs, meeting the setup and hold time requirements, are transferred to the Q outputs on positive going transitions of the clock (CK) input. When a high logic level is applied to the output control (OC) input, all outputs go to a high impedance state, regardless of what signals are present at the other inputs and the state of the storage elements.



## Features

- LSTTL Output Logic Level Compatibility as well as CMOS Output Compatibility
- High Speed Operation:  $t_{pd}$  (Clock to Q) = 15 ns typ ( $C_L = 50$  pF)
- High Output Current: Fanout of 15 LSTTL Loads
- Wide Operating Voltage:  $V_{CC} = 4.5$  to  $5.5$  V
- Low Input Current:  $1 \mu\text{A}$  max
- Low Quiescent Supply Current:  $I_{CC}$  (static) =  $4 \mu\text{A}$  max ( $T_a = 25^\circ\text{C}$ )
- Ordering Information

| Part Name                        | Package Type       | Package Code (Previous Code) | Package Abbreviation | Taping Abbreviation (Quantity) |
|----------------------------------|--------------------|------------------------------|----------------------|--------------------------------|
| HD74HCT374P                      | DILP-20 pin        | PRDP0020AC-B (DP-20NEV)      | P                    | —                              |
| HD74HCT374FPEL<br>HD74HCT534FPEL | SOP-20 pin (JEITA) | PRSP0020DD-B (FP-20DAV)      | FP                   | EL (2,000 pcs/reel)            |
| HD74HCT374RPEL<br>HD74HCT534RPEL | SOP-20 pin (JEDEC) | PRSP0020DC-A (FP-20DBV)      | RP                   | EL (1,000 pcs/reel)            |
| HD74HCT374TELL                   | TSSOP-20 pin       | PTSP0020JB-A (TTP-20DAV)     | T                    | ELL (2,000 pcs/reel)           |

Note: Please consult the sales office for the above package availability.


## Function Table

| Output Control | Clock   | D | HD74HCT374<br>Q | HD74HCT534<br>$\bar{Q}$ |
|----------------|---|---|-----------------|-------------------------|
| L              |  | H | H               | L                       |
| L              |  | L | L               | H                       |
| L              | L   | X | No change       | No change               |
| H              | X   | X | Z               | Z                       |


Notes: 1. H; High level, L; Low level, X; Irrelevant, Z; High impedance

## Pin Arrangement

### HD74HCT374

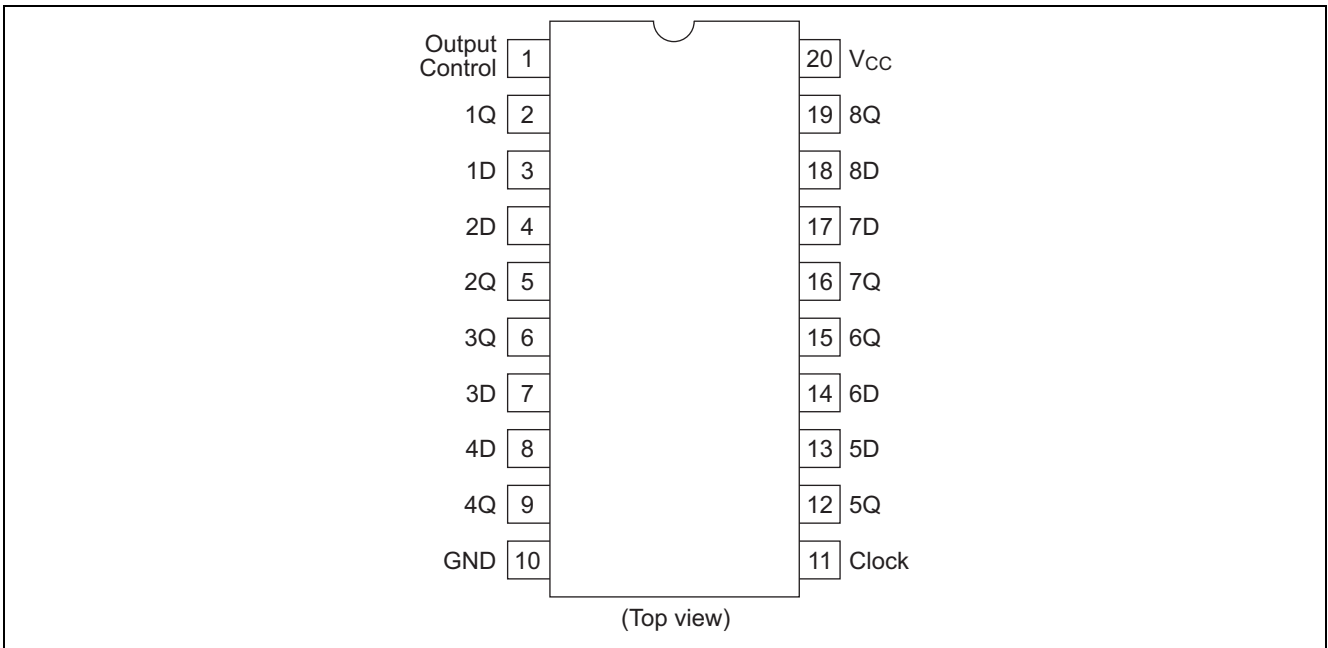


### HD74HCT534

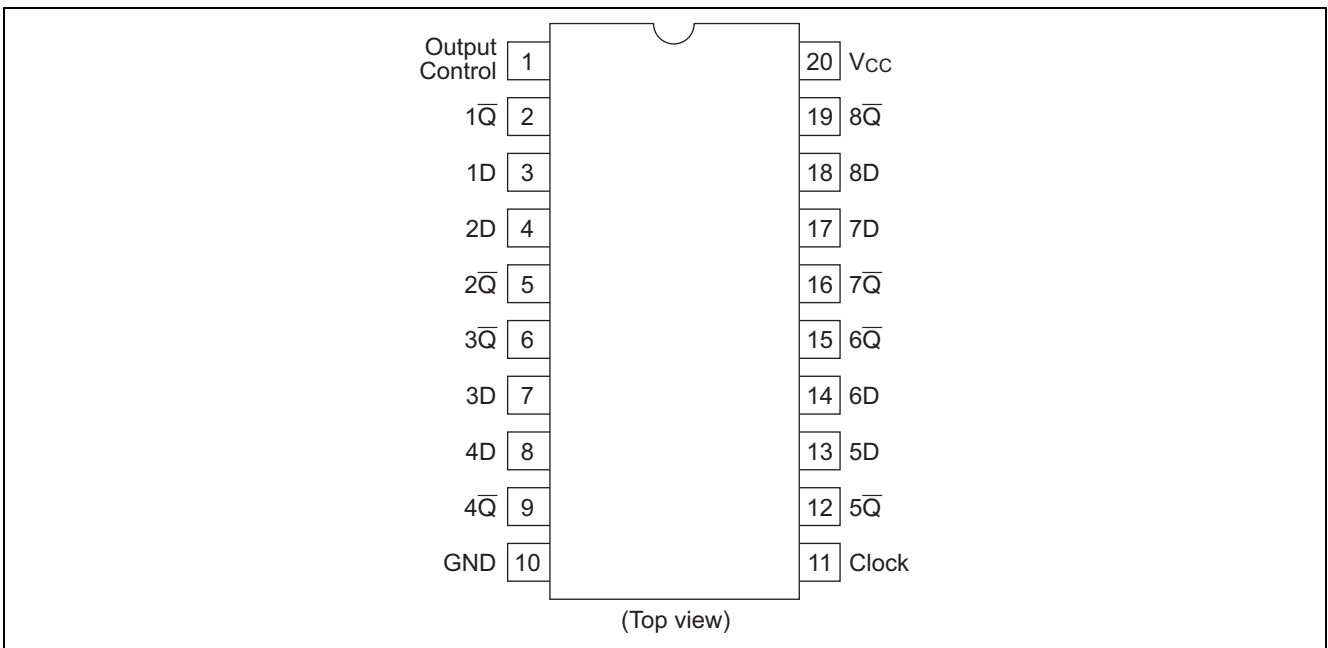


## Logic Diagram

### HD74HCT374

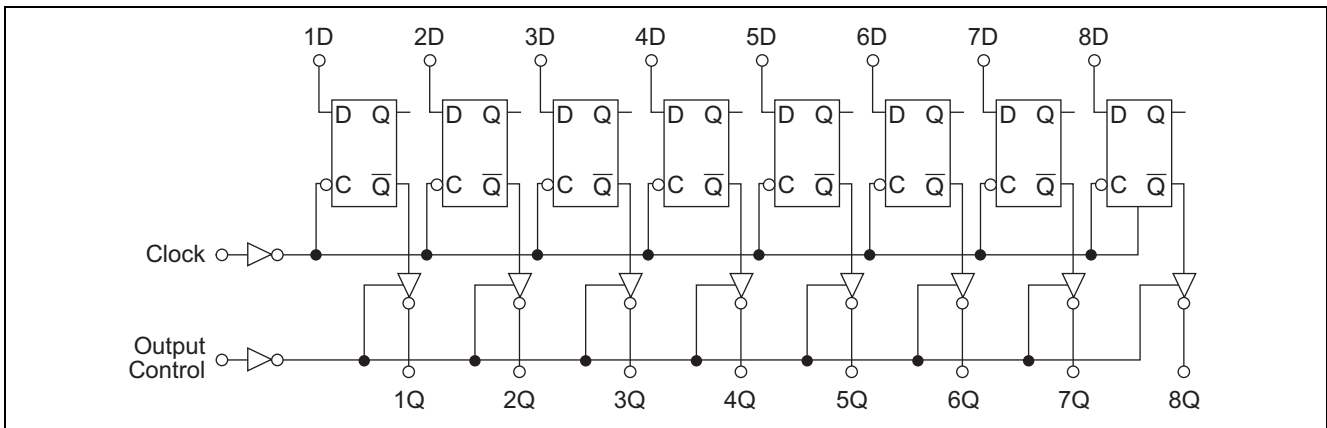

### HD74HCT534

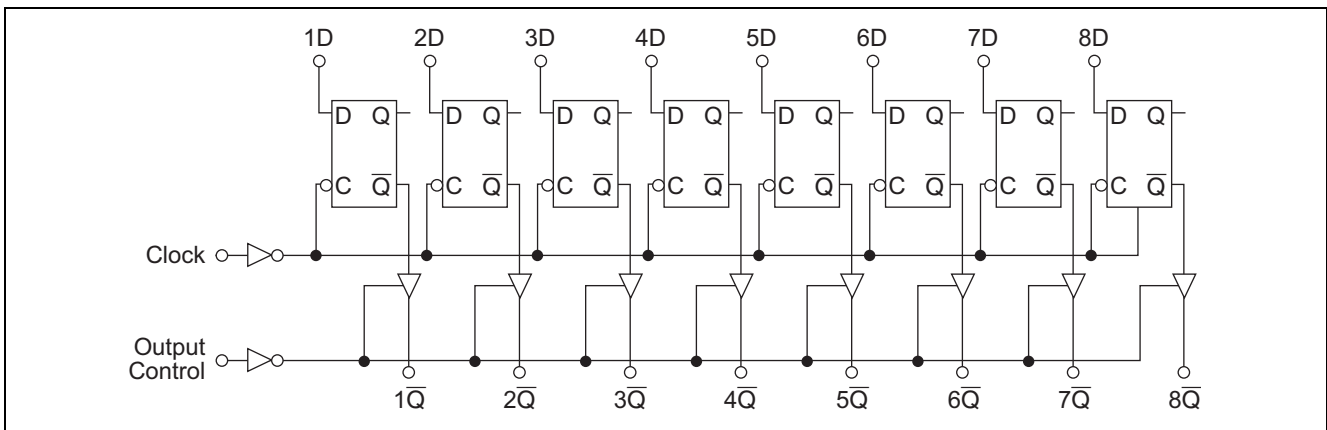

## Absolute Maximum Ratings

| Item                         | Symbol                | Ratings                | Unit        |
|------------------------------|-----------------------|------------------------|-------------|
| Supply voltage range         | $V_{CC}$              | -0.5 to 7.0            | V           |
| Input / Output voltage       | $V_{IN}, V_{OUT}$     | -0.5 to $V_{CC} + 0.5$ | V           |
| Input / Output diode current | $I_{IK}, I_{OK}$      | $\pm 20$               | mA          |
| Output current               | $I_{OUT}$             | $\pm 35$               | mA          |
| $V_{CC}$ , GND current       | $I_{CC}$ OR $I_{GND}$ | $\pm 75$               | mA          |
| Power dissipation            | $P_T$                 | 500                    | mW          |
| Storage temperature          | $T_{stg}$             | -65 to +150            | $^{\circ}C$ |

Note: The absolute maximum ratings are values, which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

## Recommended Operating Conditions

| Item                                 | Symbol            | Ratings       | Unit        | Conditions       |
|--------------------------------------|-------------------|---------------|-------------|------------------|
| Supply voltage                       | $V_{CC}$          | 4.5 to 5.5    | V           |                  |
| Input / Output voltage               | $V_{IN}, V_{OUT}$ | 0 to $V_{CC}$ | V           |                  |
| Operating temperature                | $T_a$             | -40 to 85     | $^{\circ}C$ |                  |
| Input rise / fall time <sup>*1</sup> | $t_r, t_f$        | 0 to 500      | ns          | $V_{CC} = 4.5 V$ |

Notes: 1. This item guarantees maximum limit when one input switches.

Waveform: Refer to test circuit of switching characteristics.

### Electrical Characteristics


| Item                     | Symbol          | V <sub>CC</sub> (V) | Ta = 25°C |     |      | Ta = -40 to +85°C |      | Unit | Test Conditions   |                          |
|--------------------------|-----------------|---------------------|-----------|-----|------|-------------------|------|------|---|--------------------------|
|                          |                 |                     | Min       | Typ | Max  | Min               | Max  |      |   |                          |
| Input voltage            | V <sub>IH</sub> | 4.5 to 5.5          | 2.0       | —   | —    | 2.0               | —    | V    |   |                          |
|                          | V <sub>IL</sub> | 4.5 to 5.5          | —         | —   | 0.8  | —                 | 0.8  | V    |   |                          |
| Output voltage           | V <sub>OH</sub> | 4.5                 | 4.4       | —   | —    | 4.4               | —    | V    | Vin = V <sub>IH</sub> or V <sub>IL</sub>                                    | I <sub>OH</sub> = -20 μA |
|                          |                 | 4.5                 | 4.18      | —   | —    | 4.13              | —    |      |   | I <sub>OH</sub> = -6 mA  |
|                          | V <sub>OL</sub> | 4.5                 | —         | —   | 0.1  | —                 | 0.1  | V    | Vin = V <sub>IH</sub> or V <sub>IL</sub>                                    | I <sub>OL</sub> = 20 μA  |
|                          |                 | 4.5                 | —         | —   | 0.26 | —                 | 0.33 |      |   | I <sub>OL</sub> = 6 mA   |
| Off-state output current | I <sub>OZ</sub> | 5.5                 | —         | —   | ±0.5 | —                 | ±5.0 | μA   | Vin = V <sub>IH</sub> or V <sub>IL</sub> ,<br>Vout = V <sub>CC</sub> or GND |                          |
| Input current            | I <sub>in</sub> | 5.5                 | —         | —   | ±0.1 | —                 | ±1.0 | μA   | Vin = V <sub>CC</sub> or GND  |                          |
| Quiescent current        | I <sub>CC</sub> | 5.5                 | —         | —   | 4.0  | —                 | 40   | μA   | Vin = V <sub>CC</sub> or GND, Iout = 0 μA                                   |                          |

### Switching Characteristics

(C<sub>L</sub> = 50 pF, Input t<sub>r</sub> = t<sub>f</sub> = 6 ns)


| Item                    | Symbol           | V <sub>CC</sub> (V) | Ta = 25°C |     |     | Ta = -40 to +85°C |     | Unit | Test Conditions       |  |
|-------------------------|------------------|---------------------|-----------|-----|-----|-------------------|-----|------|-----------------------|--|
|                         |                  |                     | Min       | Typ | Max | Min               | Max |      |                       |  |
| Maximum clock frequency | f <sub>max</sub> | 4.5                 | —         | —   | 30  | —                 | 24  | MHz  |                       |  |
| Propagation delay time  | t <sub>PLH</sub> | 4.5                 | —         | 12  | 28  | —                 | 35  | ns   |                       |  |
|                         | t <sub>PHL</sub> | 4.5                 | —         | 15  | 28  | —                 | 35  |      |                       |  |
| Output enable time      | t <sub>ZL</sub>  | 4.5                 | —         | 16  | 30  | —                 | 38  | ns   |                       |  |
|                         | t <sub>ZH</sub>  | 4.5                 | —         | 15  | 30  | —                 | 38  |      |                       |  |
| Output disable time     | t <sub>LZ</sub>  | 4.5                 | —         | 13  | 30  | —                 | 38  | ns   |                       |  |
|                         | t <sub>HZ</sub>  | 4.5                 | —         | 16  | 30  | —                 | 38  |      |                       |  |
| Setup time              | t <sub>su</sub>  | 4.5                 | 20        | 2   | —   | 25                | —   | ns   | Data to clock         |  |
| Hold time               | t <sub>h</sub>   | 4.5                 | 5         | 0   | —   | 6                 | —   | ns   | Clock to data         |  |
| Pulse width             | t <sub>w</sub>   | 4.5                 | 16        | 5   | —   | 20                | —   | ns   | Clock, output control |  |
| Output rise/fall time   | t <sub>TLH</sub> | 4.5                 | —         | 4   | 12  | —                 | 15  | ns   |                       |  |
|                         | t <sub>THL</sub> |                     |           |     |     |                   |     |      |                       |  |
| Input capacitance       | C <sub>in</sub>  | —                   | —         | 5   | 10  | —                 | 10  | pF   |                       |  |

### Test Circuit

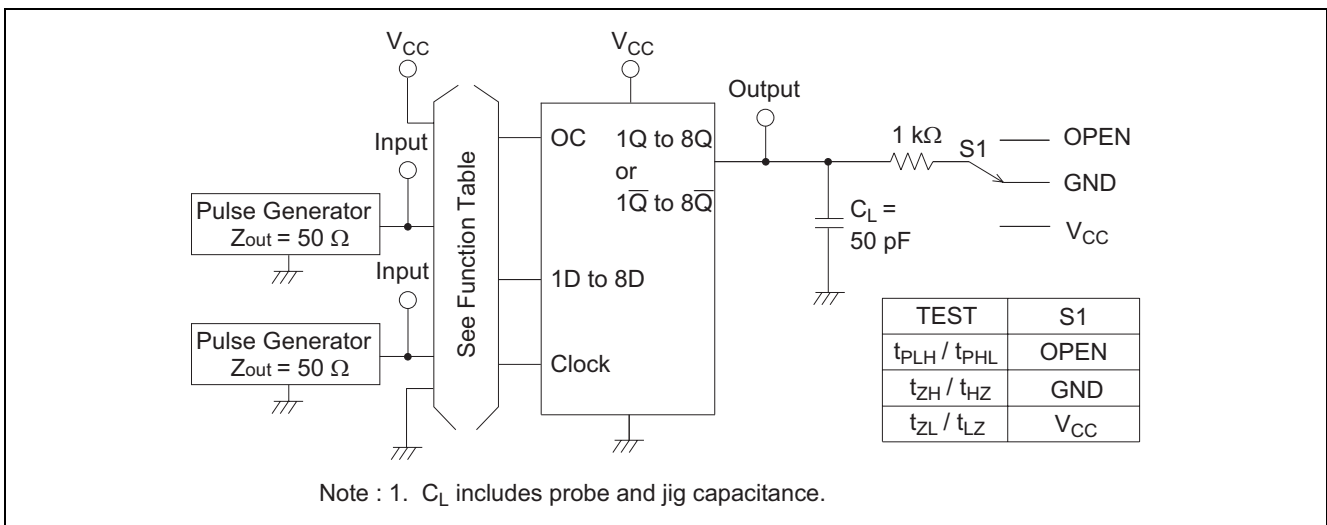


Waveforms


• Waveform –1

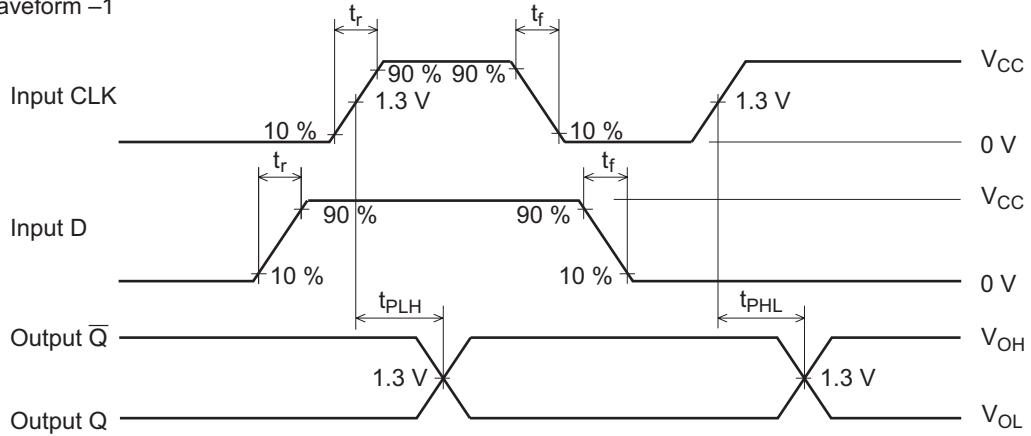

• Waveform –2


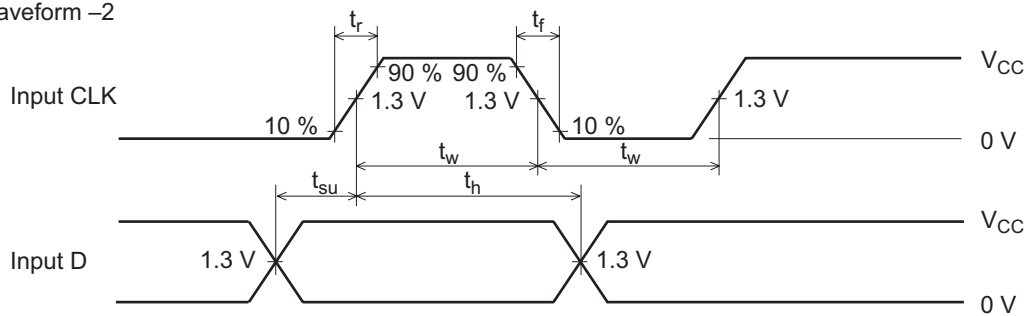


• Waveform –3

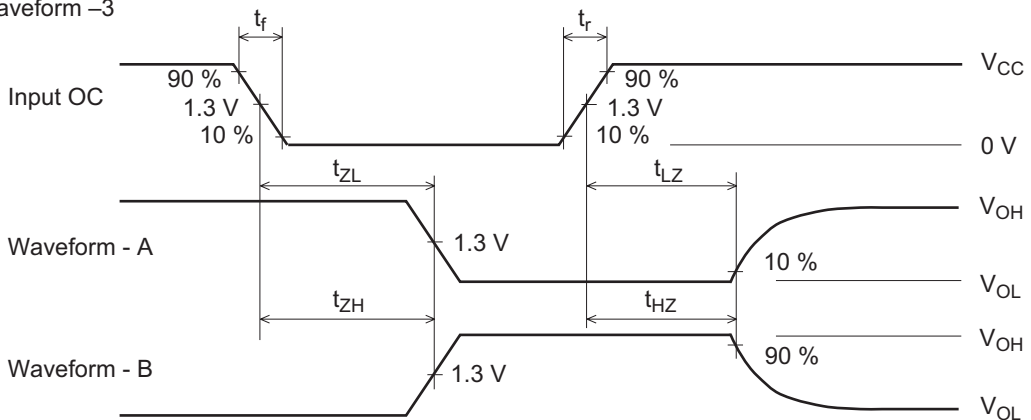



- Notes :
1. Input waveform :  $PRR \leq 1 \text{ MHz}$ , duty cycle 50%,  $t_r \leq 6 \text{ ns}$ ,  $t_f \leq 6 \text{ ns}$
  2. Waveform– A is for an output with internal conditions such that the output is low except when disabled by the output control.
  3. Waveform– B is for an output with internal conditions such that the output is high except when disabled by the output control.
  4. The output are measured one at a time with one transition per measurement.

Package Dimensions

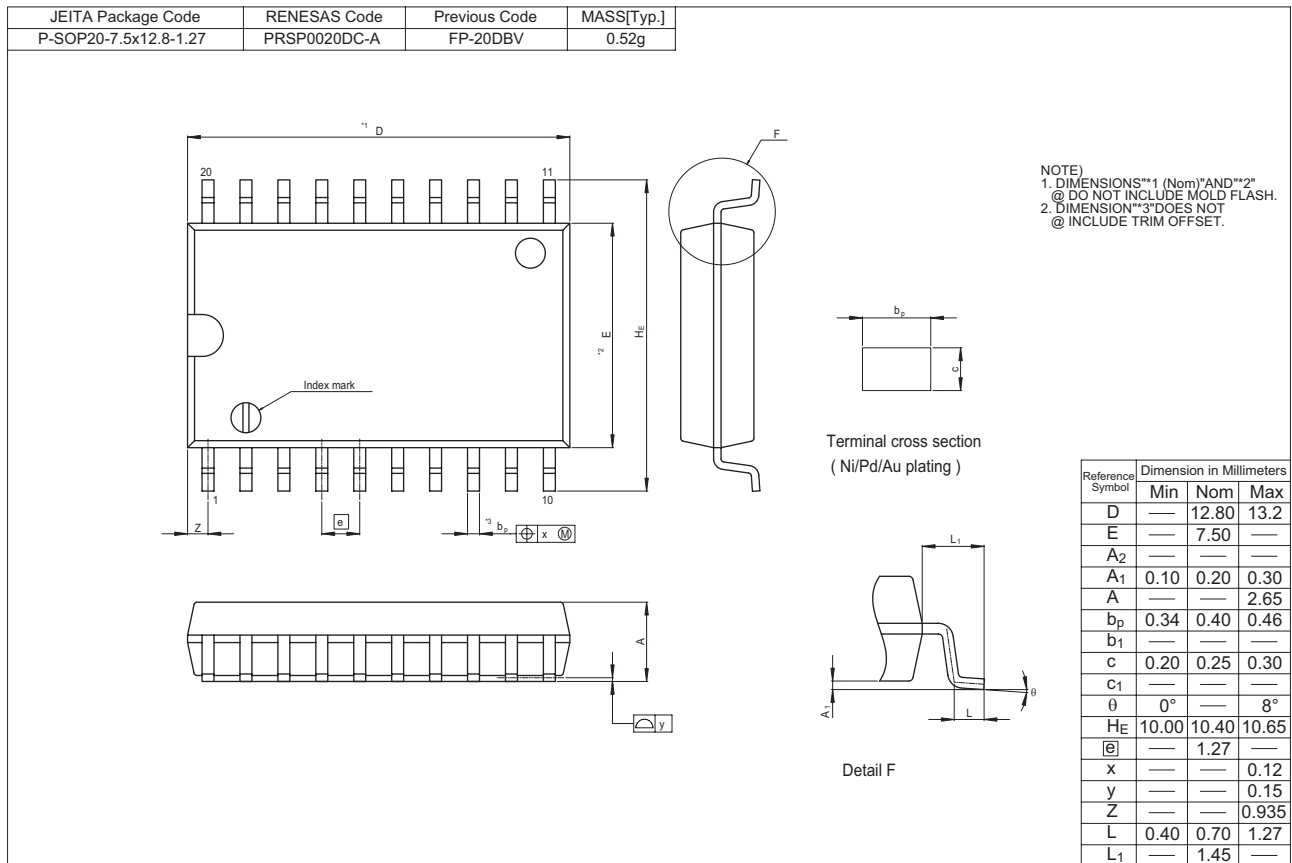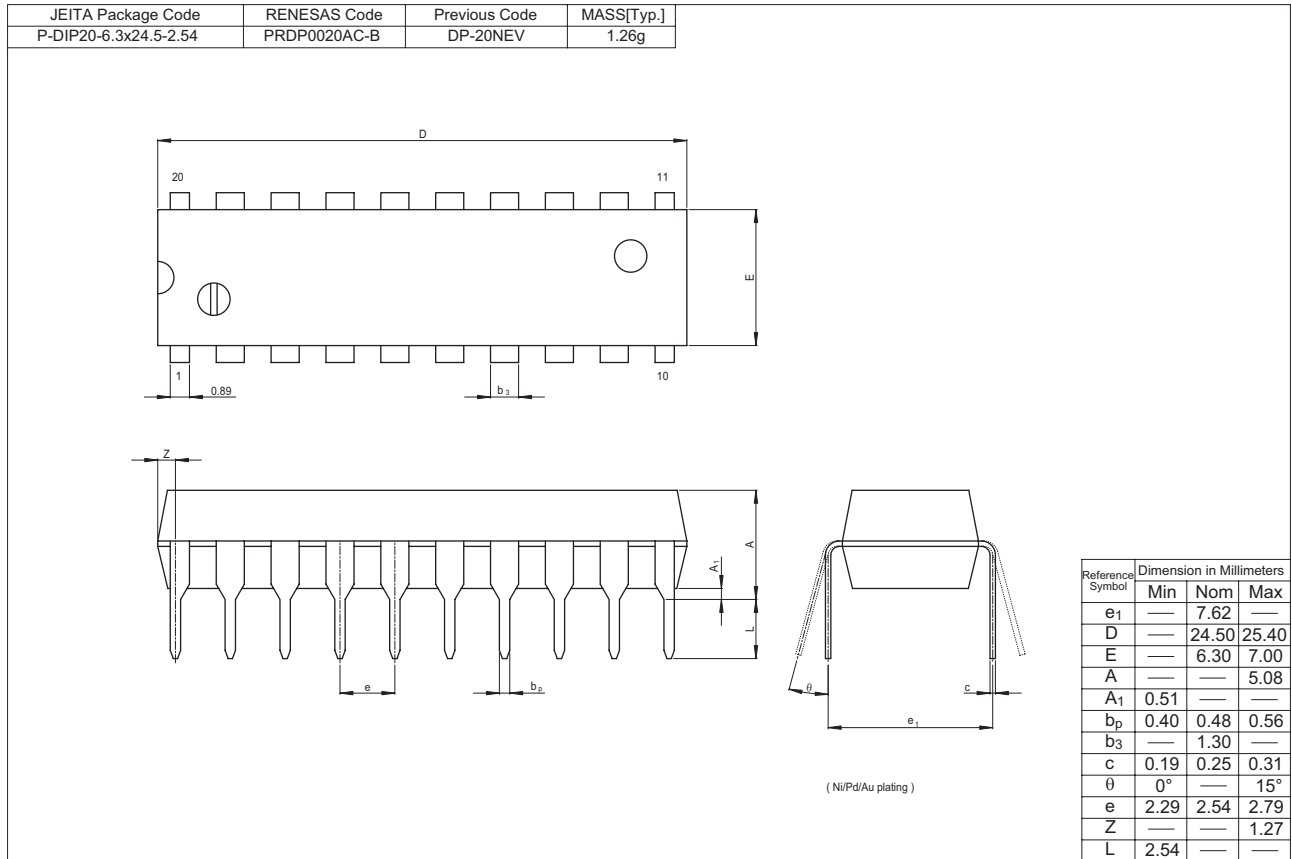

# HD74HCT374, HD74HCT534



|                       |              |               |            |
|-----------------------|--------------|---------------|------------|
| JEITA Package Code    | RENESAS Code | Previous Code | MASS[Typ.] |
| P-SOP20-5.5x12.6-1.27 | PRSP0020DD-B | FP-20DAV      | 0.31g      |

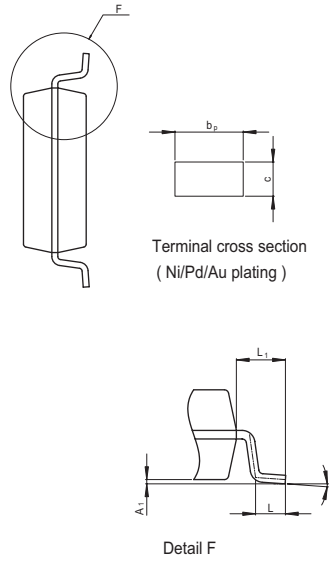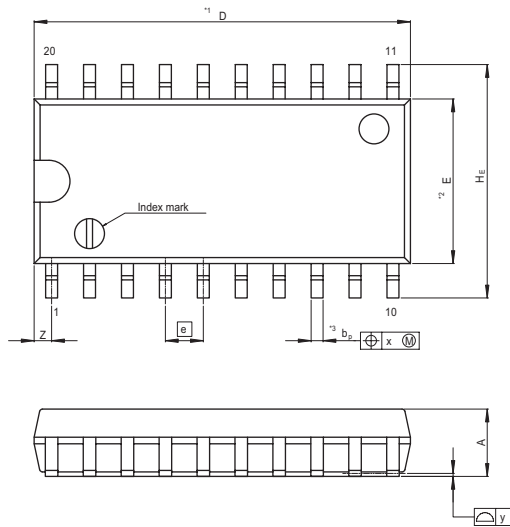

NOTE)  
 1. DIMENSIONS\*\*1 (Nom)\*\*AND\*\*2\*  
 DO NOT INCLUDE MOLD FLASH.  
 2. DIMENSION\*\*3\*DOES NOT  
 INCLUDE TRIM OFFSET.

| Reference Symbol | Dimension in Millimeters |       |      |
|------------------|--------------------------|-------|------|
|                  | Min                      | Nom   | Max  |
| D                | —                        | 12.60 | 13.0 |
| E                | —                        | 5.50  | —    |
| A <sub>2</sub>   | —                        | —     | —    |
| A <sub>1</sub>   | 0.00                     | 0.10  | 0.20 |
| A                | —                        | —     | 2.20 |
| b <sub>P</sub>   | 0.34                     | 0.40  | 0.46 |
| b <sub>1</sub>   | —                        | —     | —    |
| c                | 0.15                     | 0.20  | 0.25 |
| c <sub>1</sub>   | —                        | —     | —    |
| θ                | 0°                       | —     | 8°   |
| H <sub>E</sub>   | 7.50                     | 7.80  | 8.00 |
| Ⓜ                | —                        | 1.27  | —    |
| x                | —                        | —     | 0.12 |
| y                | —                        | —     | 0.15 |
| Z                | —                        | —     | 0.80 |
| L                | 0.50                     | 0.70  | 0.90 |
| L <sub>1</sub>   | —                        | 1.15  | —    |

|                        |              |               |            |
|------------------------|--------------|---------------|------------|
| JEITA Package Code     | RENESAS Code | Previous Code | MASS[Typ.] |
| P-TSSOP20-4.4x6.5-0.65 | PTSP0020JB-A | TTP-20DAV     | 0.07g      |

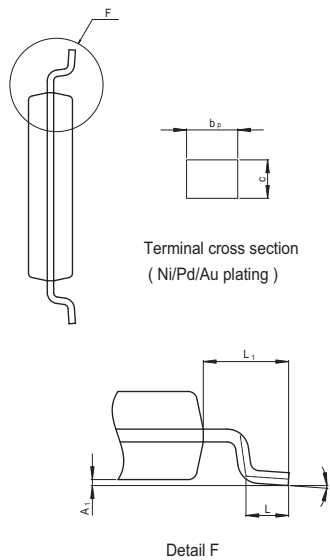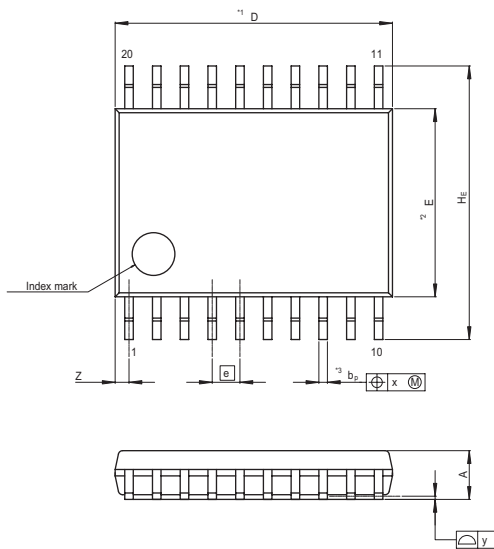

NOTE)  
 1. DIMENSIONS\*\*1 (Nom)\*\*AND\*\*2\*  
 DO NOT INCLUDE MOLD FLASH.  
 2. DIMENSION\*\*3\*DOES NOT  
 INCLUDE TRIM OFFSET.

| Reference Symbol | Dimension in Millimeters |      |      |
|------------------|--------------------------|------|------|
|                  | Min                      | Nom  | Max  |
| D                | —                        | 6.50 | 6.80 |
| E                | —                        | 4.40 | —    |
| A <sub>2</sub>   | —                        | —    | —    |
| A <sub>1</sub>   | 0.03                     | 0.07 | 0.10 |
| A                | —                        | —    | 1.10 |
| b <sub>P</sub>   | 0.15                     | 0.20 | 0.25 |
| b <sub>1</sub>   | —                        | —    | —    |
| c                | 0.10                     | 0.15 | 0.20 |
| c <sub>1</sub>   | —                        | —    | —    |
| θ                | 0°                       | —    | 8°   |
| H <sub>E</sub>   | 6.20                     | 6.40 | 6.60 |
| Ⓜ                | —                        | 0.65 | —    |
| x                | —                        | —    | 0.13 |
| y                | —                        | —    | 0.10 |
| Z                | —                        | —    | 0.65 |
| L                | 0.4                      | 0.5  | 0.6  |
| L <sub>1</sub>   | —                        | 1.0  | —    |

**Keep safety first in your circuit designs!**

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

**Notes regarding these materials**

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



**RENESAS SALES OFFICES**

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

**Renesas Technology America, Inc.**

450 Holger Way, San Jose, CA 95134-1368, U.S.A  
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

**Renesas Technology Europe Limited**

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

**Renesas Technology (Shanghai) Co., Ltd.**

Unit 204, 205, AZIACenter, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120  
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7898

**Renesas Technology Hong Kong Ltd.**

7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong  
Tel: <852> 2265-6688, Fax: <852> 2730-6071

**Renesas Technology Taiwan Co., Ltd.**

10th Floor, No.99, Fushing North Road, Taipei, Taiwan  
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

**Renesas Technology Singapore Pte. Ltd.**

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: <65> 6213-0200, Fax: <65> 6278-8001

**Renesas Technology Korea Co., Ltd.**

Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea  
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

**Renesas Technology Malaysia Sdn. Bhd**

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: <603> 7955-9390, Fax: <603> 7955-9510