

### Typical Applications


The HMC219MS8 / HMC219MS8E is ideal for:

- UNII & HiperLAN
- ISM
- Microwave Radios

### Features

- Ultra Small Package: MSOP8
- Conversion Loss: 8.5 dB
- LO / RF Isolation: 25 dB

### Functional Diagram

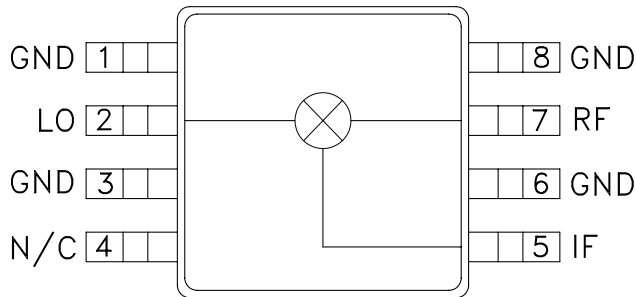

### General Description

The HMC219MS8 & HMC219MS8E are ultra miniature double-balanced mixers in 8 lead plastic surface mount packages (MSOP). This passive MMIC mixer is constructed of GaAs Schottky diodes and novel planar transformer baluns on the chip. The device can be used as an upconverter, downconverter, bi-phase (de)modulator, or phase comparator. The consistent MMIC performance will improve system operation and assure regulatory compliance.


### Electrical Specifications, $T_A = +25^\circ \text{C}$ , As a Function of LO Drive

| Parameter                     | LO = +13 dBm<br>IF = 100 MHz |      |      | LO = +11 dBm<br>IF = 100 MHz |      |      | Units |
|-------------------------------|------------------------------|------|------|------------------------------|------|------|-------|
|                               | Min.                         | Typ. | Max. | Min.                         | Typ. | Max. |       |
| Frequency Range, RF & LO      | 4.5 - 9.0                    |      |      | 4.5 - 8.6                    |      |      | GHz   |
| Frequency Range, IF           | DC - 2.5                     |      |      | DC - 2.5                     |      |      | GHz   |
| Conversion Loss               |                              | 8.5  | 10   |                              | 8.5  | 10   | dB    |
| Noise Figure (SSB)            |                              | 8.5  | 10   |                              | 8.5  | 10   | dB    |
| LO to RF Isolation            | 17                           | 25   |      | 20                           | 25   |      | dB    |
| LO to IF Isolation            | 17                           | 25   |      | 20                           | 25   |      | dB    |
| IP3 (Input)                   | 15                           | 21   |      | 15                           | 21   |      | dBm   |
| 1 dB Gain Compression (Input) | 7                            | 10   |      | 5                            | 8    |      | dBm   |




## GaAs MMIC SMT DOUBLE-BALANCED MIXER, 4.5 - 9 GHz


**Conversion Loss vs Temperature @ LO = +13 dBm**

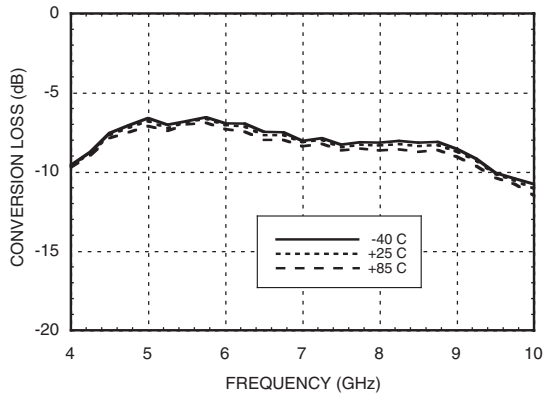


**Isolation @ LO = +13 dBm**

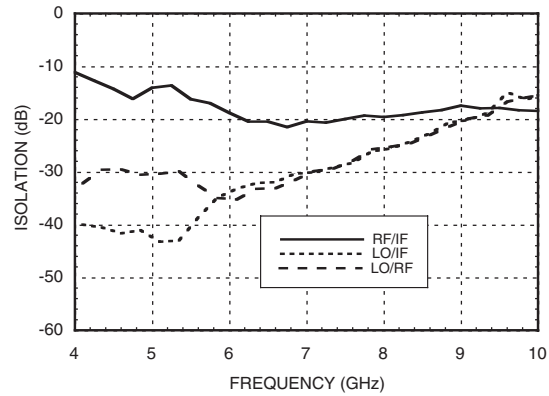


**Conversion Loss vs. LO Drive**

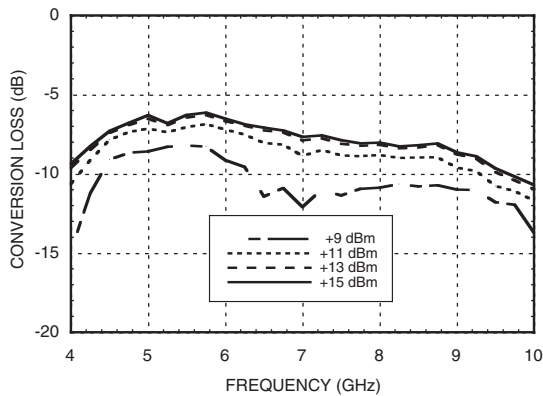


**Return Loss @ LO = +13 dBm**

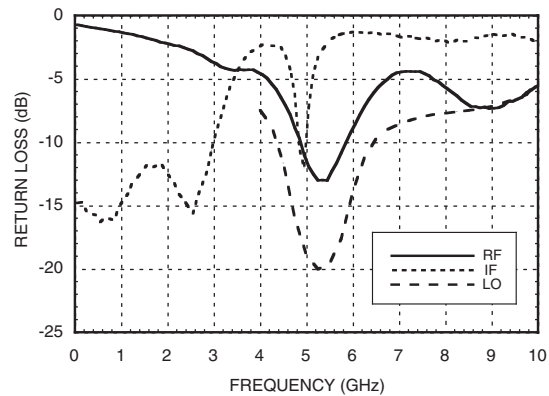


**IF Bandwidth @ LO = +13 dBm**

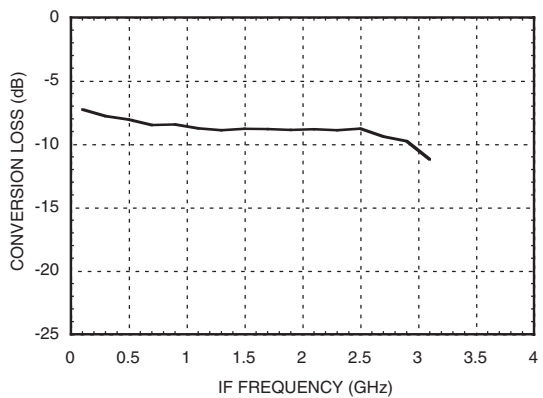


**P1dB vs. Temperature LO = +13 dBm**

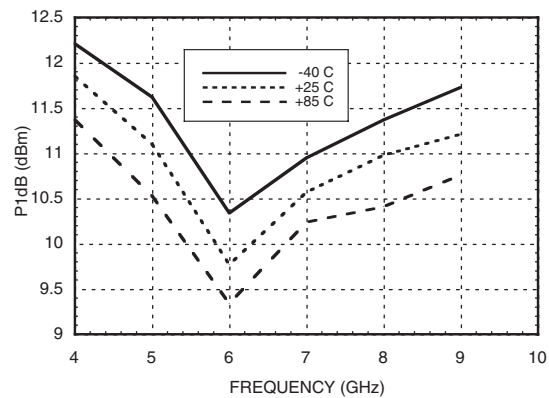


### Input IP3 vs. LO Drive

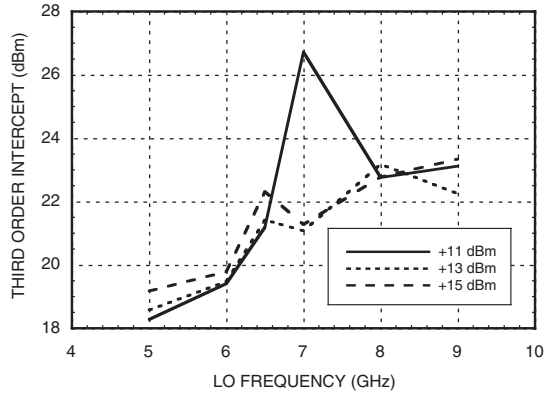


### Input IP3 vs. Temperature @ LO = +13 dBm

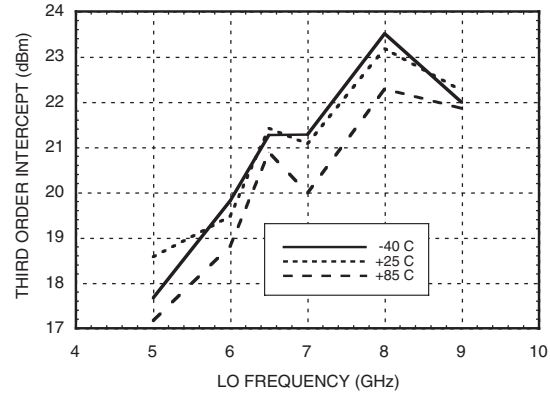

### Input IP2 vs. Drive

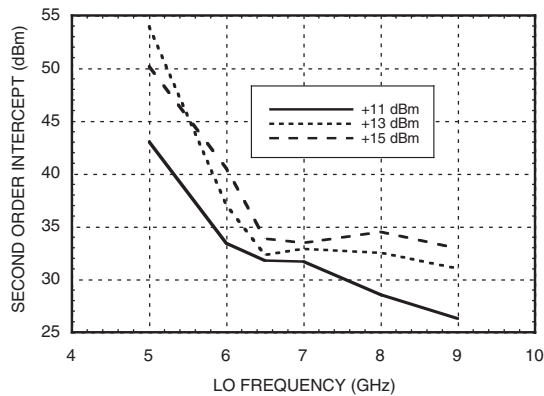

### Input IP2 vs. Temperature @ LO = +13 dBm

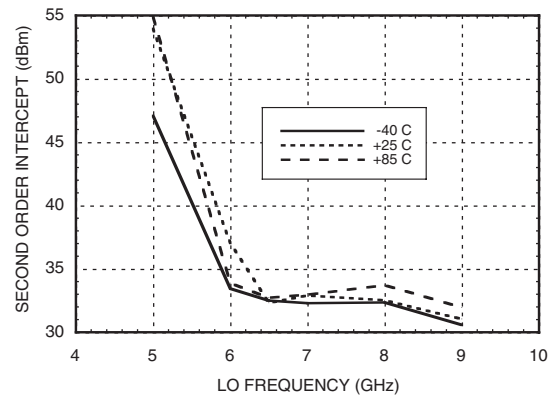

### MxN Spurious Outputs

| mRF | nLO  |      |      |      |      |
|-----|------|------|------|------|------|
|     | 0    | 1    | 2    | 3    | 4    |
| 0   | xx   | 12.2 | 22.3 | 20.7 | 33.9 |
| 1   | 13.2 | 0    | 36.9 | 36.7 | 49.5 |
| 2   | 79.8 | 53.7 | 47.7 | 55.4 | 68.1 |
| 3   | >105 | >105 | 78.1 | 65.5 | 83.1 |
| 4   | >105 | >105 | >105 | 98.1 | 87.1 |

RF = 6 GHz @ -10 dBm  
 LO = 6.1 GHz @ +13 dBm  
 All values in dBc below the IF power level (-1RF + 1LO).

### Harmonics of LO

| LO Freq. (GHz) | nLO Spur at RF Port |    |    |    |
|----------------|---------------------|----|----|----|
|                | 1                   | 2  | 3  | 4  |
| 4.0            | 33                  | 29 | 39 | 54 |
| 5.0            | 31                  | 23 | 34 | 47 |
| 6.0            | 35                  | 21 | 40 | 55 |
| 7.0            | 31                  | 26 | 53 | xx |
| 8.0            | 27                  | 32 | 54 | xx |
| 9.0            | 21                  | 43 | xx | xx |

LO = +13 dBm  
 Values in dBc below input LO level measured at the RF port.




### Absolute Maximum Ratings

|                       |                |
|-----------------------|----------------|
| RF / IF Input         | +13 dBm        |
| LO Drive              | +27 dBm        |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C  |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

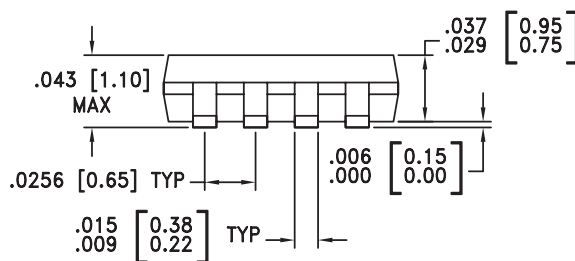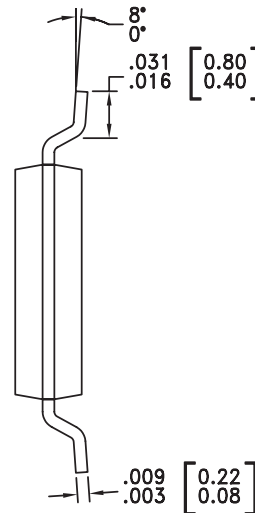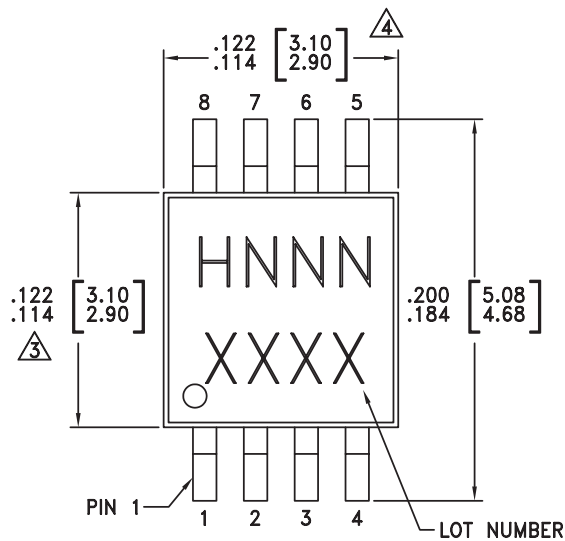

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS].
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.

### Package Information


| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC219MS8   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H219<br>XXXX                   |
| HMC219MS8E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H219<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

### Evaluation Circuit Board

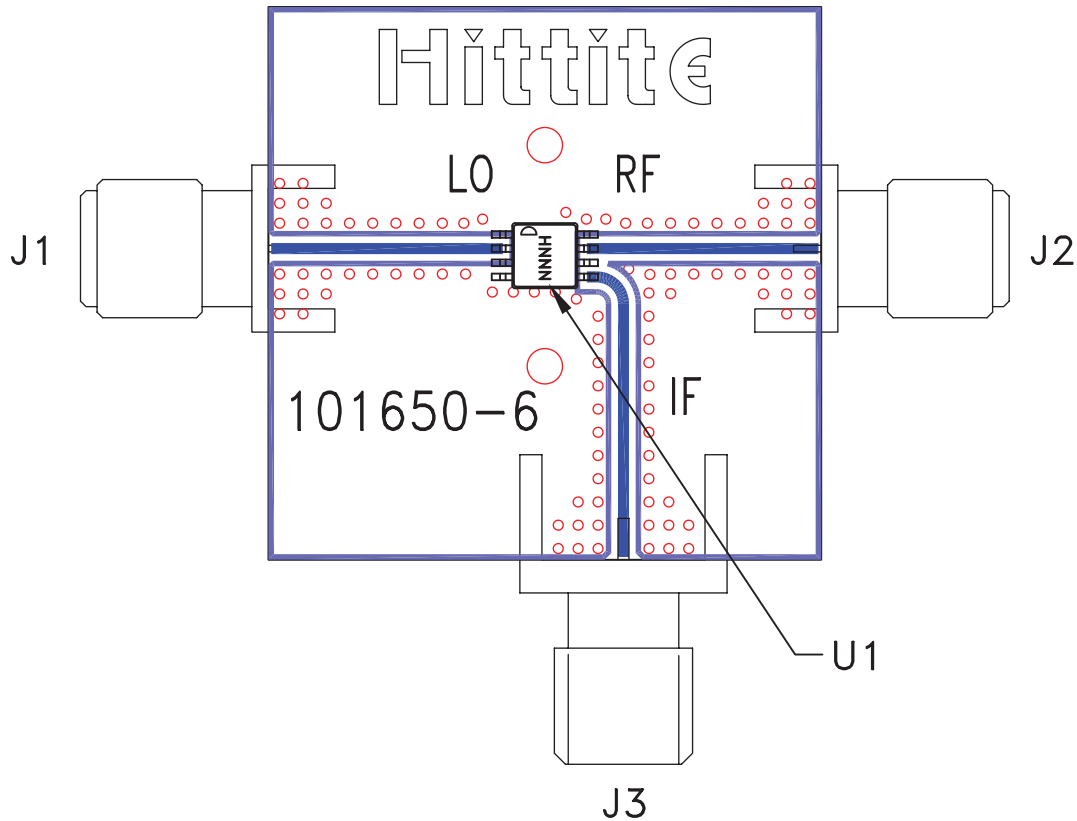

### List of Materials for Evaluation PCB 103350 [1]

| Item    | Description                  |
|---------|------------------------------|
| J1 - J3 | PCB Mount SMA RF Connector   |
| U1      | HMC219MS8 / HMC219MS8E Mixer |
| PCB [2] | 101650 Evaluation Board      |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads should be connected directly to the ground plane similar to that shown. A sufficient number of VIA holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



**Notes:**