

ICPL2730
ICPL2731



**HIGH SPEED DUAL CHANNEL
OPTICALLY COUPLED ISOLATOR
PHOTODARLINGTON OUTPUT**

APPROVALS

- UL recognised, File No. E91231

DESCRIPTION



These dual channel diode-darlington optocouplers use a pair of light emitting diodes and an integrated high gain photon detectors to provide 2500Volts_{RMS} electrical isolation between input and output. Seperate connection for the photodiode bias and output darlington collector improve the speed up to a hundred times that of a conventional photo-darlington coupler by reducing the base-collector capacitance.

FEATURES

- High speed - DC to 200kBits/s operation
- High Common Mode Transient Immunity 10kV/μs typical
- TTL Compatible - 0.1V V_{OL} typical
- Low Input Current Requirement - 0.5mA
- High Current Transfer Ratio - 2000% typ.
- Open Collector Output
- 2500V_{RMS} Withstand Test Voltage, 1 min
- ICPL2731 has improved noise shield which gives superior common mode rejection
- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- Line receivers
- Digital logic ground isolation
- Telephone ring detector
- Current loop receiver

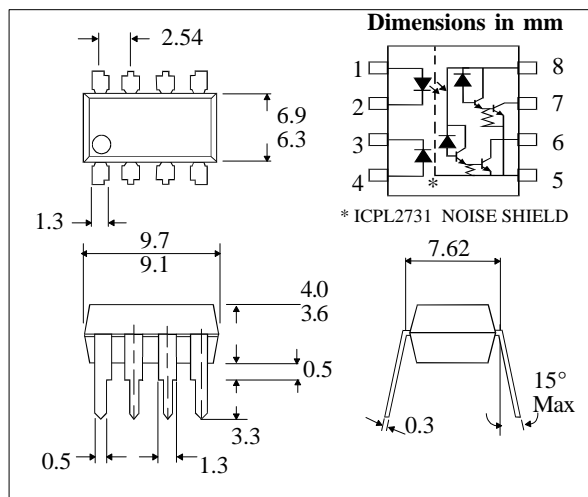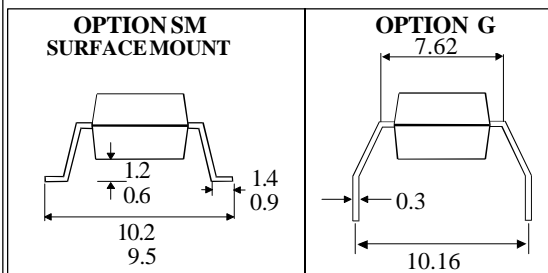

**ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)**

| | |
|-------------------------------------------------------------------------|------------------|
| Storage Temperature | -55°C to + 125°C |
| Operating Temperature | -40°C to + 85°C |
| Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs) | 260°C |

INPUT DIODE

| | |
|-------------------------------------------------------------|------------|
| Average Forward Current | 20mA (1) |
| Peak Forward Current (50% duty cycle, 1ms pulse width) | 40mA |
| Reverse Voltage | 5V |
| Power Dissipation | 35mW(2) |

DETECTOR

| | |
|---------------------------|--------------|
| Output Current | 60mA (3) |
| Supply and Output Voltage | |
| ICPL2730 | -0.5 to +7V |
| ICPL2731 | -0.5 to +18V |
| Power Dissipation | 100mW (4) |

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax :(01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
http://www.isocom.com

ELECTRICAL CHARACTERISTICS ($T_A = 0^\circ\text{C}$ to 70°C , $V_{CC} = 4.5\text{V}$ Unless otherwise noted)

| PARAMETER | SYM | DEVICE | MIN | TYP* | MAX | UNITS | TEST CONDITION |
|--------------------------------------------------------|---------------------------------|----------|------|-----------|-----|----------------------------|------------------------------------------------------------------------------------------|
| Current Transfer Ratio (note 5, 6) | CTR | ICPL2731 | 400 | 2000 | | % | $I_F = 0.5\text{mA}, V_O = 0.4\text{V}$ |
| | | ICPL2731 | 500 | 2000 | | % | $I_F = 1.6\text{mA}, V_O = 0.4\text{V}$ |
| | | ICPL2730 | 300 | 2000 | | % | $I_F = 1.6\text{mA}, V_O = 0.4\text{V}$ |
| Logic Low Output Voltage (note 5) | V_{OL} | ICPL2731 | | 0.1 | 0.4 | V | $I_F = 0.5\text{mA}, I_O = 2\text{mA}$ |
| | | ICPL2731 | | 0.1 | 0.4 | V | $I_F = 1.6\text{mA}, I_O = 8\text{mA}$ |
| | | ICPL2731 | | 0.1 | 0.4 | V | $I_F = 5\text{mA}, I_O = 15\text{mA}$ |
| | | ICPL2731 | | 0.1 | 0.4 | V | $I_F = 12\text{mA}, I_O = 24\text{mA}$ |
| | | ICPL2730 | | 0.1 | 0.4 | V | $I_F = 1.6\text{mA}, I_O = 4.8\text{mA}$ |
| Logic High Output Current (note 5) | I_{OH} | ICPL2731 | | 0.01 | 100 | μA | $I_F = 0\text{mA}$ $V_O = V_{CC} = 18\text{V}$ |
| | | ICPL2730 | | 0.01 | 100 | μA | $I_F = 0\text{mA}$ $V_O = V_{CC} = 7\text{V}$ |
| Logic Low Supply Current | I_{CCL} | ICPL2731 | | 0.5 | | mA | $I_{F1} = I_{F2} = 1.6\text{mA}, V_{CC} = 18\text{V}$ $V_{O1} = V_{O2} = \text{open}$ |
| | | ICPL2730 | | 0.4 | | mA | $I_{F1} = I_{F2} = 1.6\text{mA}, V_{CC} = 7\text{V}$ $V_{O1} = V_{O2} = \text{open}$ |
| Logic High Supply Current | I_{CCH} | ICPL2731 | | 5 | | nA | $I_{F1} = I_{F2} = 0\text{mA}, V_{CC} = 18\text{V}$ $V_{O1} = V_{O2} = \text{open}$ |
| | | ICPL2730 | | 4 | | nA | $I_{F1} = I_{F2} = 0\text{mA}, V_{CC} = 18\text{V}$ $V_{O1} = V_{O2} = \text{open}$ |
| Input Forward Voltage (note 5) | V_F | | | 1.45 | 1.7 | V | $I_F = 1.6\text{mA}, T_A = 25^\circ\text{C}$ |
| Temperature Coefficient of Forward Voltage (note 5) | $\frac{\Delta V_F}{\Delta T_A}$ | | | -1.8 | | $\text{mV}/^\circ\text{C}$ | $I_F = 1.6\text{mA}$ |
| Input Reverse Voltage (note 5) | V_R | | 5 | | | V | $I_R = 10\mu\text{A}, T_A = 25^\circ\text{C}$ |
| Input Capacitance (note 5) | C_{IN} | | | 60 | | pF | $f = 1\text{MHz}, V_F = 0$ |
| Input-output Isolation Voltage (note 10) | V_{ISO} | | 2500 | 5000 | | V_{RMS} | R.H.equal to or less than 50%, $t = 1\text{min. } T_A = 25^\circ\text{C}$ |
| Resistance (Input to Output) (note 10) | R_{I-O} | | | 10^{12} | | Ω | $V_{I-O} = 500\text{V dc}$ |
| Capacitance (Input to Output) (note 10) | C_{I-O} | | | 0.6 | | pF | $f = 1\text{MHz}$ |
| Input-Input Insulation (note 7) | I_{I-I} | | | 0.005 | | μA | R.H.equal to or less than 50%, $t = 5\text{sec. } V_{I-I} = 500\text{DC}$ |
| Resistance (Input to Input) (note7) | R_{I-I} | | | 10^{11} | | Ω | $V_{I-I} = 500\text{V dc}$ |
| Capacitance (Input to Input) (note7) | C_{I-I} | | | 0.25 | | pF | $f = 1\text{MHz}$ |

* All typicals at $T_A = 25^\circ\text{C}$

SWITCHING SPECIFICATIONS AT $T_A = 25^\circ\text{C}$ ($V_{CC} = 5\text{V}$ Unless otherwise noted)

| PARAMETER | SYM | DEVICE | MIN | TYP | MAX | UNITS | TEST CONDITION |
|-------------------------------------------------------------------------------|-----------|------------|-------|--------|-----|------------------------|-----------------------------------------------------------------------------|
| Propagation Delay Time to Logic Low at Output (fig 1)(note 5) | t_{PHL} | ICPL2731 | | 25 | 100 | μs | $I_F = 0.5\text{mA}, R_L = 4.7\text{k}\Omega$ |
| | | ICPL2730/1 | | 0.5 | 2 | μs | $I_F = 12\text{mA}, R_L = 270\Omega$ |
| | | ICPL2730/1 | | 4.0 | 20 | μs | $I_F = 1.6\text{mA}, R_L = 2.2\text{k}\Omega$ |
| Propagation Delay Time to Logic High at Output (fig 1)(note 5) | t_{PLH} | ICPL2731 | | 20 | 60 | μs | $I_F = 0.5\text{mA}, R_L = 4.7\text{k}\Omega$ |
| | | ICPL2730/1 | | 4 | 10 | μs | $I_F = 12\text{mA}, R_L = 270\Omega$ |
| | | ICPL2730/1 | | 12 | 35 | μs | $I_F = 1.6\text{mA}, R_L = 2.2\text{k}\Omega$ |
| Common Mode Transient Immunity at Logic High Level Output (fig 2)(note 9) | CM_H | | 1000 | 10000 | | $\text{V}/\mu\text{s}$ | $I_F = 0\text{mA}, V_{CM} = 10\text{V}_{PP}$ $R_L = 2.2\text{k}\Omega$ |
| Common Mode Transient Immunity at Logic Low Level Output (fig 2)(note 8) | CM_L | | -1000 | -10000 | | $\text{V}/\mu\text{s}$ | $I_F = 1.6\text{mA}, V_{CM} = 10\text{V}_{PP}$ $R_L = 2.2\text{k}\Omega$ |

NOTES:-

- Derate linearly above 70°C free air temperature at a rate of $0.5 \text{ mA}/^\circ\text{C}$.
- Derate linearly above 70°C free air temperature at a rate of $0.9 \text{ mW}/^\circ\text{C}$.
- Derate linearly above 70°C free air temperature at a rate of $0.6 \text{ mA}/^\circ\text{C}$.
- Derate linearly above 35°C free air temperature at a rate of $1.7 \text{ mW}/^\circ\text{C}$.
Output power = (Collector output) + (Supply output).
- Each channel.
- CURRENT TRANSFER RATIO is defined as the ratio of output collector current, I_O , to the forward LED input current, I_F times 100%.
- Measured between pins 1 and 2 shorted together, and pins 3 and 4 shorted together.
- Common mode transient immunity in Logic Low level is the maximum tolerable (negative) dV_{CM}/dt on the trailing edge of the common mode pulse signal, V_{CM} to assure that the output will remain in Logic Low state (i.e. $V_O < 0.8\text{V}$). Measured in volts per microsecond ($\text{V}/\mu\text{s}$).
- Common mode transient immunity in Logic High level is the maximum tolerable (positive) dV_{CM}/dt on the leading edge of the common mode pulse V_{CM} to assure that the output will remain in a Logic High state (i.e. $V_O > 2.0\text{V}$). Measured in volts per microsecond ($\text{V}/\mu\text{s}$).
- Device considered a two-terminal device: pins 1,2,3, and 4 shorted together and pins 5,6,7 and 8 shorted together.

FIG.1 SWITCHING TEST CIRCUIT

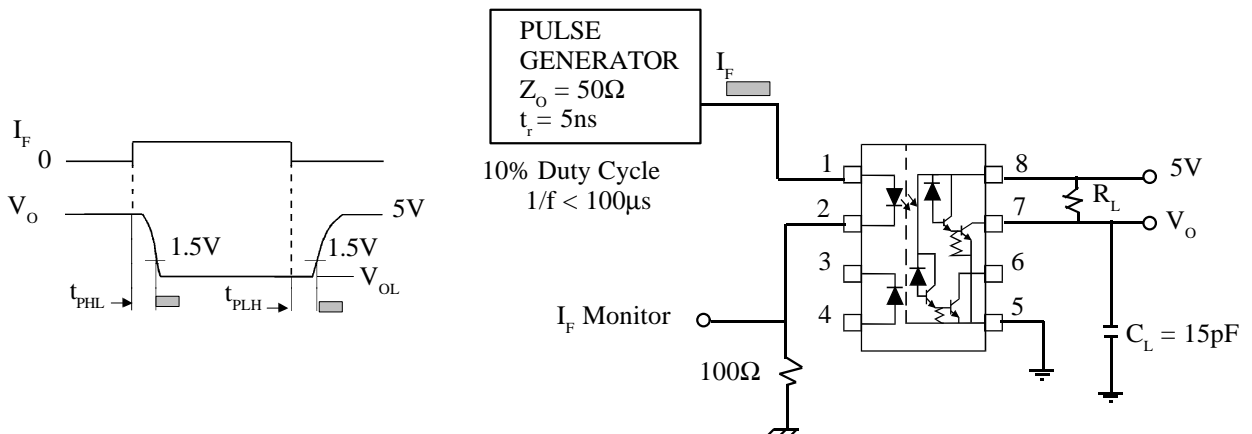


FIG. 2 TEST CIRCUIT FOR TRANSIENT IMMUNITY AND TYPICAL WAVEFORMS

