

Large Current Positive Voltage Regulator

The KIC3201S/T series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage. The KIC3201S/T consists of a driver transistor, a precision reference voltage and an error amplifier. Output voltage is selectable in 0.05V steps between a voltage of 1.2V and 6.0V.

Features


- Maximum Output Current : 400mA
- Dropout Voltage : 150mV @100mA, 300mV @200mA for $V_{OUT}=3.0V$
- Maximum Operating Voltage : 10V
- Output Voltage Range : 1.2V ~ 6.0V (selectable in 0.05V steps)
- Highly Accurate : $\pm 2\%$
- Low Power Consumption : Typ. 8.0uA
- Operational Temperature Range : $-40^{\circ}C \sim 85^{\circ}C$
- Low ESR Capacitor : Ceramic compatible or Tantalum

Applications

- Battery Powered Equipment
- Reference Voltage Sources
- Digital Cameras, Camcoders
- Palmtop Computers
- Portable Audio Video Equipment

Pin Configuration


KIC3201S-XX





| No. | Symbol | Description |
|-----|-----------|-------------|
| 1 | GND | Ground |
| 2 | V_{IN} | Power input |
| 3 | V_{OUT} | Output |

• Heat Sink is common to ② (V_{IN})

KIC3201T-XX



| No. | Symbol | Description |
|-----|-----------|-------------|
| 1 | V_{OUT} | Output |
| 2 | GND | Ground |
| 3 | V_{IN} | Power input |

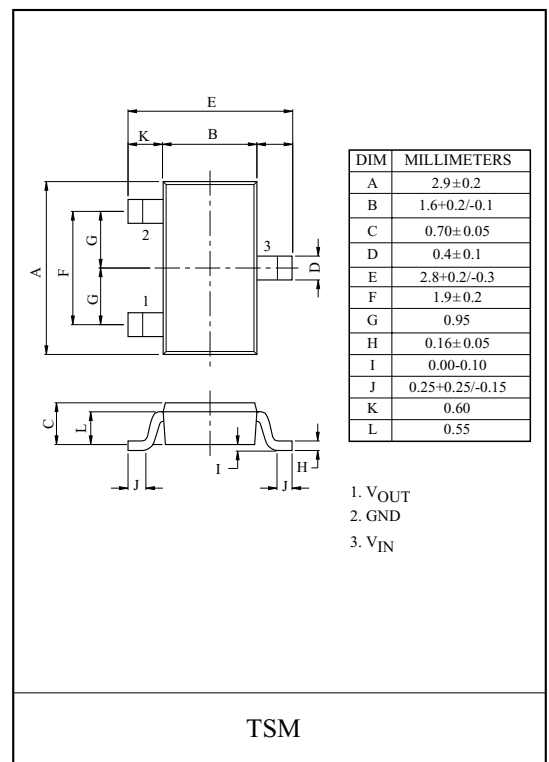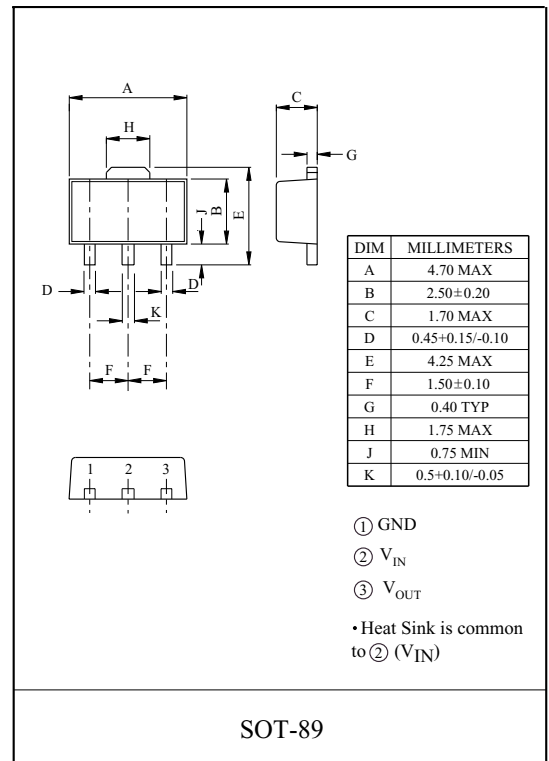

KIC3201S/T-12 ~ KIC3201S/T-60

Line up

| V _{OUT(V)} | SOT-89 | | TSM | |
|---------------------|-------------|---------|-------------|---------|
| | ITEM | Marking | ITEM | Marking |
| 1.2 | KIC3201S-12 | A2 | KIC3201T-12 | B2C |
| 1.3 | KIC3201S-13 | A3 | KIC3201T-13 | B3C |
| 1.4 | KIC3201S-14 | A4 | KIC3201T-14 | B4C |
| 1.5 | KIC3201S-15 | A5 | KIC3201T-15 | B5C |
| 1.6 | KIC3201S-16 | A6 | KIC3201T-16 | B6C |
| 1.7 | KIC3201S-17 | A7 | KIC3201T-17 | B7C |
| 1.8 | KIC3201S-18 | A8 | KIC3201T-18 | B8C |
| 1.9 | KIC3201S-19 | A9 | KIC3201T-19 | B9C |
| 2.0 | KIC3201S-20 | B0 | KIC3201T-20 | C0C |
| 2.1 | KIC3201S-21 | B1 | KIC3201T-21 | C1C |
| 2.2 | KIC3201S-22 | B2 | KIC3201T-22 | C2C |
| 2.3 | KIC3201S-23 | B3 | KIC3201T-23 | C3C |
| 2.4 | KIC3201S-24 | B4 | KIC3201T-24 | C4C |
| 2.5 | KIC3201S-25 | B5 | KIC3201T-25 | C5C |
| 2.6 | KIC3201S-26 | B6 | KIC3201T-26 | C6C |
| 2.7 | KIC3201S-27 | B7 | KIC3201T-27 | C7C |
| 2.8 | KIC3201S-28 | B8 | KIC3201T-28 | C8C |
| 2.9 | KIC3201S-29 | B9 | KIC3201T-29 | C9C |
| 3.0 | KIC3201S-30 | C0 | KIC3201T-30 | D0C |
| 3.1 | KIC3201S-31 | C1 | KIC3201T-31 | D1C |
| 3.2 | KIC3201S-32 | C2 | KIC3201T-32 | D2C |
| 3.3 | KIC3201S-33 | C3 | KIC3201T-33 | D3C |
| 3.4 | KIC3201S-34 | C4 | KIC3201T-34 | D4C |
| 3.5 | KIC3201S-35 | C5 | KIC3201T-35 | D5C |
| 3.6 | KIC3201S-36 | C6 | KIC3201T-36 | D6C |
| 3.7 | KIC3201S-37 | C7 | KIC3201T-37 | D7C |
| 3.8 | KIC3201S-38 | C8 | KIC3201T-38 | D8C |
| 3.9 | KIC3201S-39 | C9 | KIC3201T-39 | D9C |
| 4.0 | KIC3201S-40 | D0 | KIC3201T-40 | E0C |
| 4.1 | KIC3201S-41 | D1 | KIC3201T-41 | E1C |
| 4.2 | KIC3201S-42 | D2 | KIC3201T-42 | E2C |
| 4.3 | KIC3201S-43 | D3 | KIC3201T-43 | E3C |
| 4.4 | KIC3201S-44 | D4 | KIC3201T-44 | E4C |
| 4.5 | KIC3201S-45 | D5 | KIC3201T-45 | E5C |
| 4.6 | KIC3201S-46 | D6 | KIC3201T-46 | E6C |
| 4.7 | KIC3201S-47 | D7 | KIC3201T-47 | E7C |
| 4.8 | KIC3201S-48 | D8 | KIC3201T-48 | E8C |
| 4.9 | KIC3201S-49 | D9 | KIC3201T-49 | E9C |
| 5.0 | KIC3201S-50 | E0 | KIC3201T-50 | F0C |
| 5.1 | KIC3201S-51 | E1 | KIC3201T-51 | F1C |
| 5.2 | KIC3201S-52 | E2 | KIC3201T-52 | F2C |
| 5.3 | KIC3201S-53 | E3 | KIC3201T-53 | F3C |
| 5.4 | KIC3201S-54 | E4 | KIC3201T-54 | F4C |
| 5.5 | KIC3201S-55 | E5 | KIC3201T-55 | F5C |
| 5.6 | KIC3201S-56 | E6 | KIC3201T-56 | F6C |
| 5.7 | KIC3201S-57 | E7 | KIC3201T-57 | F7C |
| 5.8 | KIC3201S-58 | E8 | KIC3201T-58 | F8C |
| 5.9 | KIC3201S-59 | E9 | KIC3201T-59 | F9C |
| 6.0 | KIC3201S-60 | F0 | KIC3201T-60 | G0C |

* Other Voltages available, Selectable in 0.05V steps Contact KEC for details.

KIC3201S/T-12 ~ KIC3201S/T-60

Absolute Maximum Ratings


| Characteristics | Symbol | Rating | Units |
|-------------------------------------|----------------|------------------------------|-------|
| Input Voltage | V_{IN} | 12 | V |
| Output Current | I_{OUT} | 500 | mA |
| Output Voltage | V_{OUT} | $V_{SS}-0.3 \sim V_{IN}+0.3$ | V |
| Power Dissipation ^(Note) | P_D (SOT-89) | 900 | mW |
| | P_D (TSM) | | |
| Operating Temperature | T_{OPR} | -40 ~ 85 | °C |
| Storage Temperature | T_{STG} | -65 ~ 150 | °C |

Note) Package mounted on a ceramic board (600mm²×0.8mm)


| Parameter | Symbol | Conditions | Min | Typ | Max | Units |
|--|---|--|-----------------------|-----------|-----------------------|--------|
| Input Voltage | V_{IN} | | - | - | 10 | V |
| Output Voltage | V_{OUT} | $I_{OUT}=40\text{mA}$, $V_{IN}=V_{OUT}+1\text{V}$ | $V_{OUT} \times 0.98$ | V_{OUT} | $V_{OUT} \times 1.02$ | V |
| Maximum Output Current | $I_{OUT(MAX)}$ | $V_{OUT}=1.2\text{V} \sim 1.5\text{V}$ | 400 | - | - | mA |
| | | $V_{OUT}=1.6\text{V} \sim 2.4\text{V}$ | | | | |
| | | $V_{OUT}=2.5\text{V} \sim 2.9\text{V}$ | | | | |
| | | $V_{OUT}=3.0\text{V} \sim 6.0\text{V}$ | | | | |
| Load Regulation | Reg Load | $1\text{mA} \leq I_{OUT} \leq 200\text{mA}$, $V_{IN}=V_{OUT}+1\text{V}$ | - | 40 | 100 | mV |
| Line Regulation | Reg Line | $V_{OUT}+1.0\text{V} \leq V_{IN} \leq 8\text{V}$, $I_{OUT}=40\text{mA}$ | - | 0.2 | 0.3 | %/V |
| Dropout Voltage | V_{D1} | $V_{OUT}=1.2 \sim 1.7\text{V}$, $I_{OUT}=100\text{mA}$ | - | 500 | 700 | mV |
| | | $V_{OUT}=1.8 \sim 2.4\text{V}$, $I_{OUT}=100\text{mA}$ | - | 200 | 300 | |
| | | $V_{OUT}=2.5 \sim 2.9\text{V}$, $I_{OUT}=100\text{mA}$ | - | 170 | 250 | |
| | | $V_{OUT}=3.0 \sim 4.9\text{V}$, $I_{OUT}=100\text{mA}$ | - | 150 | 220 | |
| | | $V_{OUT}=5.0 \sim 6.0\text{V}$, $I_{OUT}=100\text{mA}$ | - | 100 | 180 | |
| | V_{D2} | $V_{OUT}=1.2 \sim 1.7\text{V}$, $I_{OUT}=200\text{mA}$ | - | 800 | 1100 | mV |
| | | $V_{OUT}=1.8 \sim 2.4\text{V}$, $I_{OUT}=200\text{mA}$ | - | 400 | 600 | |
| | | $V_{OUT}=2.5 \sim 2.9\text{V}$, $I_{OUT}=200\text{mA}$ | - | 320 | 500 | |
| | | $V_{OUT}=3.0 \sim 4.9\text{V}$, $I_{OUT}=200\text{mA}$ | - | 300 | 420 | |
| | | $V_{OUT}=5.0 \sim 6.0\text{V}$, $I_{OUT}=200\text{mA}$ | - | 200 | 320 | |
| Supply Current | I_{DD} | $V_{IN}=V_{OUT(T)}+1\text{V}$ | - | 8 | 16 | μA |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{OPR} \cdot V_{OUT}}$ | $I_{OUT}=40\text{mA}$, $-40^\circ\text{C} \leq T_{OPR} \leq 85^\circ\text{C}$ | - | 100 | - | ppm/°C |
| Short Circuit Current | I_{SC} | $V_{IN}=V_{OUT}+1\text{V}$, $V_{OUT}=0\text{V}$ | - | 50 | - | mA |

KIC3201S/T-12 ~ KIC3201S/T-60

Application Circuit

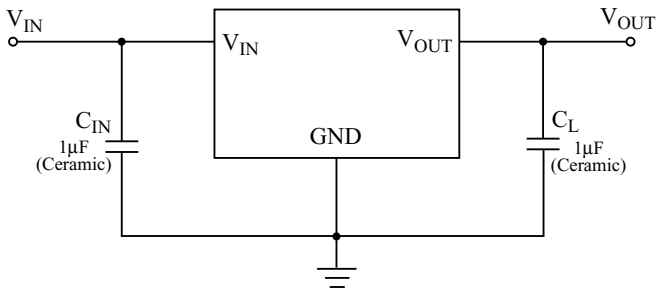

Block Diagram

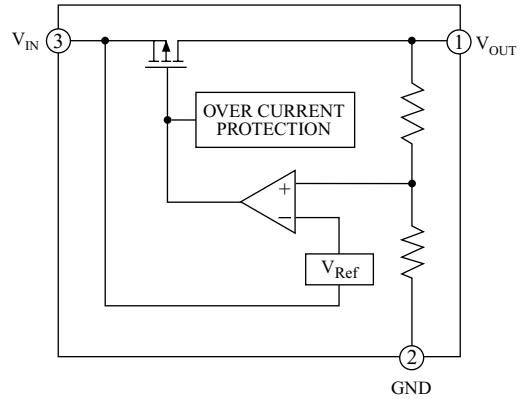

● KIC3201S/T-18

Fig. 1 $I_{OUT} - V_{OUT}$

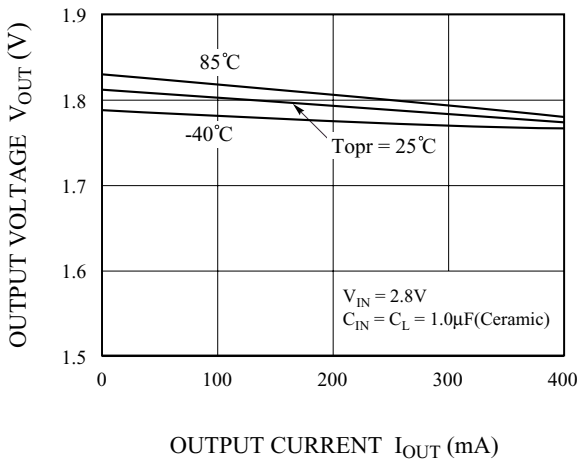


Fig. 2 $V_{IN} - V_{OUT}$

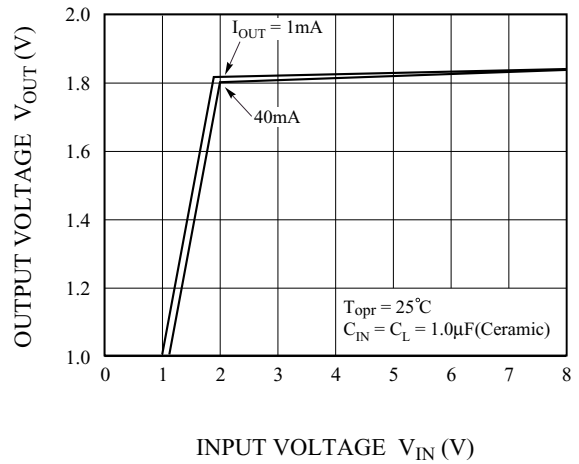


Fig. 3 $V_{IN} - I_{SS}$


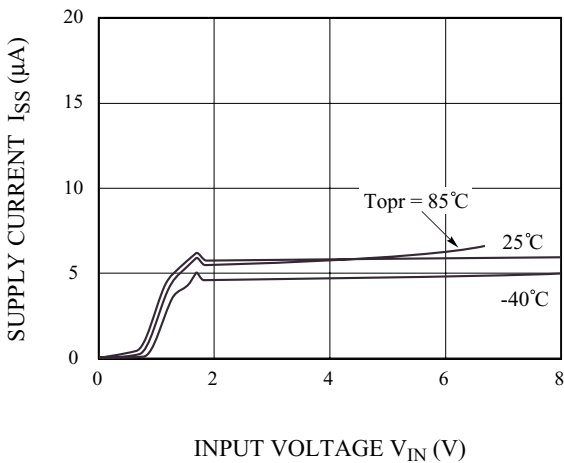


Fig. 4 $T_a - V_{OUT}$

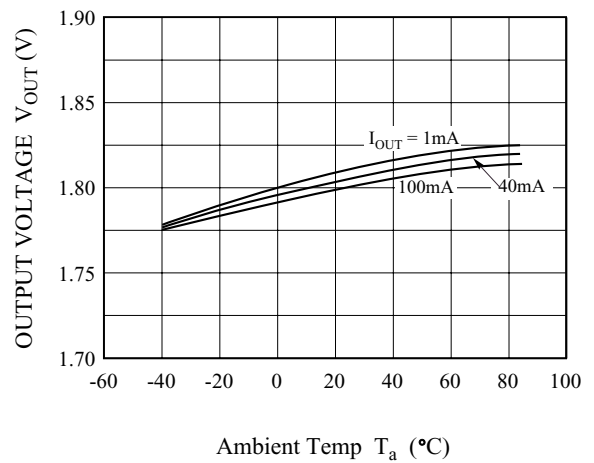

KIC3201S/T-12 ~ KIC3201S/T-60

Fig. 5 Input Transient Response

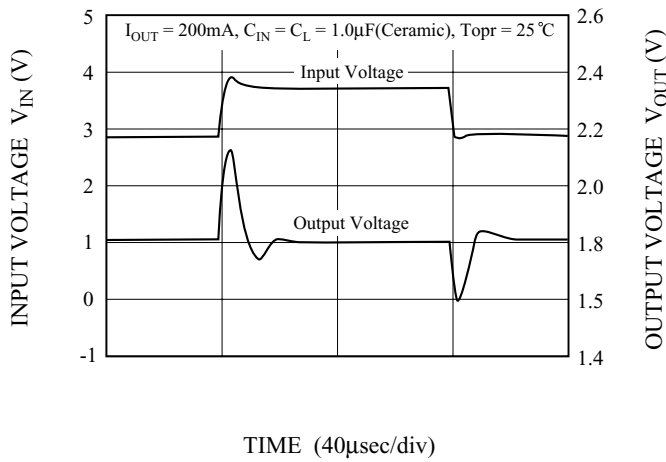


Fig. 6 Load Transient Response ($I_{OUT} = 40\text{mA}$)

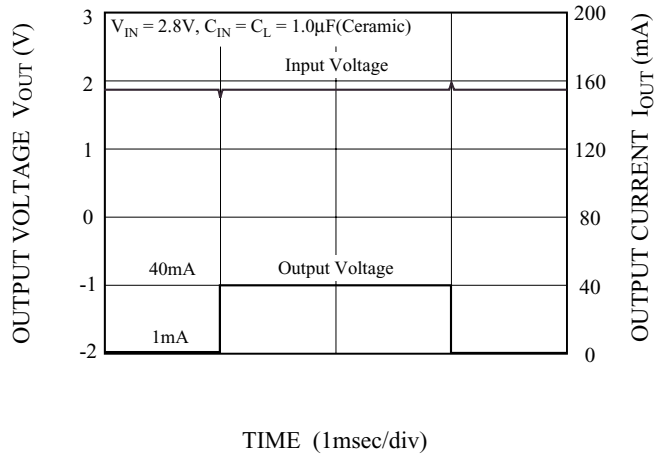


Fig. 7 Load Transient Response ($I_{OUT} = 200\text{mA}$)

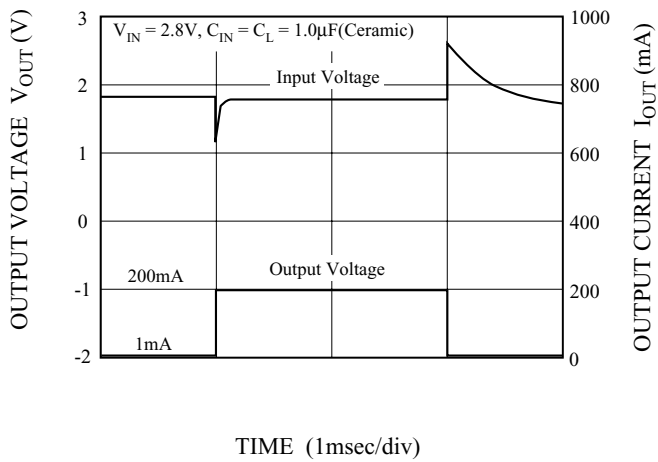


Fig. 8 PSRR

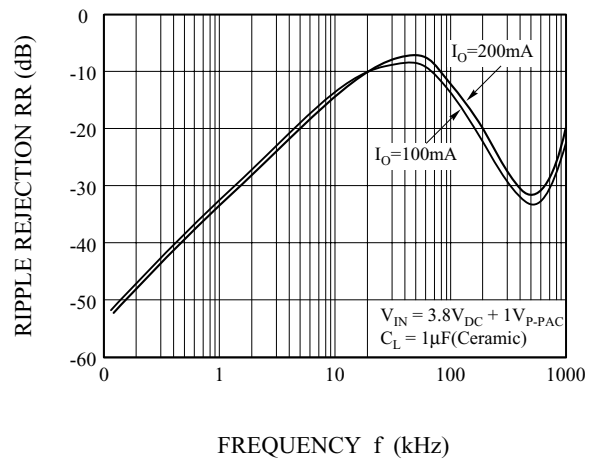


Fig. 9 $I_{OUT} - V_{DROP}$

