


POWER AMPLIFIER APPLICATIONS.
DRIVER STAGE AMPLIFIER APPLICATIONS.

FEATURES

- High Transition Frequency : $f_T=100\text{MHz(Typ.)}$
- Complementary Pair with KTA1837.

MAXIMUM RATING (Ta=25 °C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	230	V
Collector-Emitter Voltage		V_{CEO}	230	V
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current		I_C	1	A
Base Current		I_B	0.1	A
Collector Power Dissipation	Ta=25 °C	P_C	2.0	W
	Tc=25 °C		20	
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

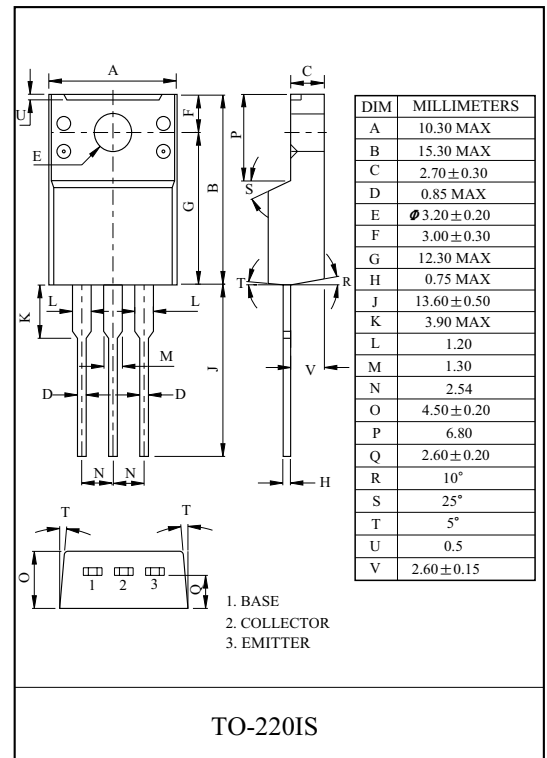


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=230\text{V}, I_E=0$	-	-	1.0	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5\text{V}, I_C=0$	-	-	1.0	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	230	-	-	V
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=100\text{mA}$	100	-	320	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	-	1.5	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5\text{V}, I_C=500\text{mA}$	-	-	1.0	V
Transition Frequency	f_T	$V_{CE}=10\text{V}, I_C=100\text{mA}$	-	100	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$	-	20	-	pF


$I_C - V_{CE}$

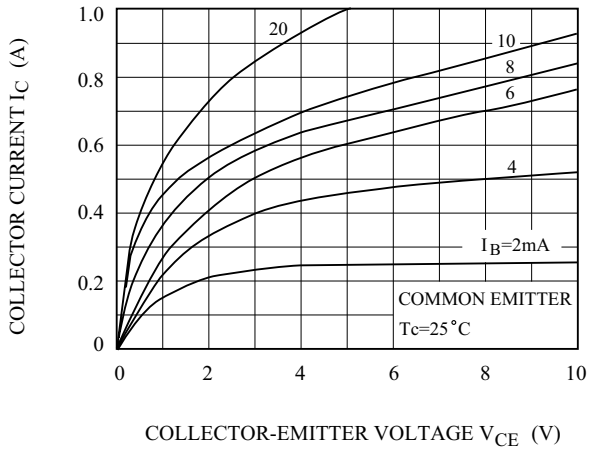


$I_C - V_{BE}$

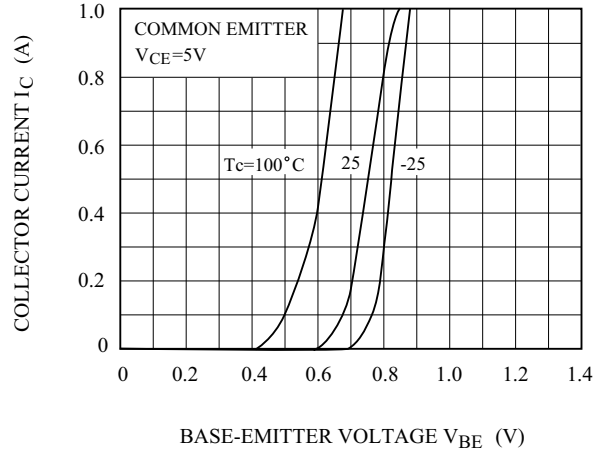


$h_{FE} - I_C$

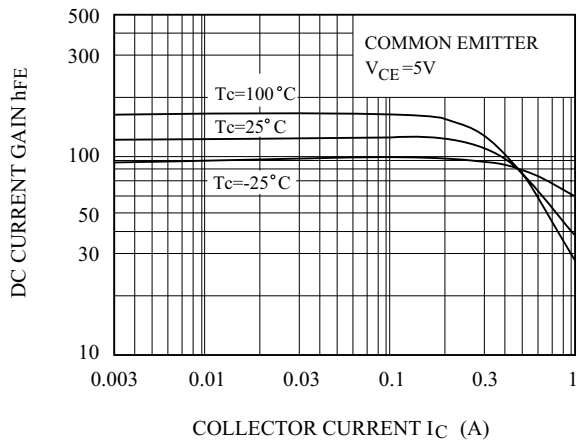

$V_{CE(sat)} - I_C$

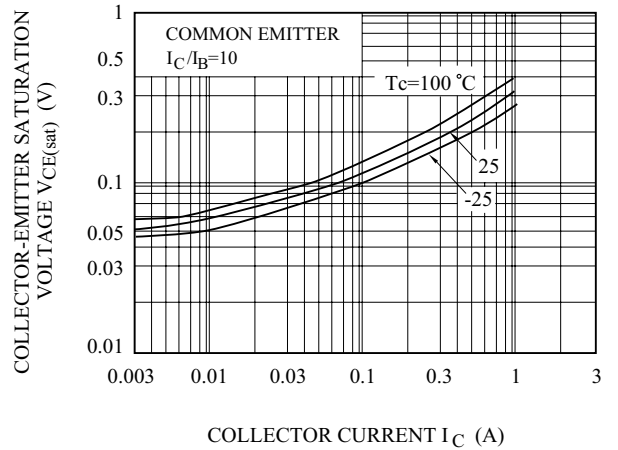

$f_T - I_C$

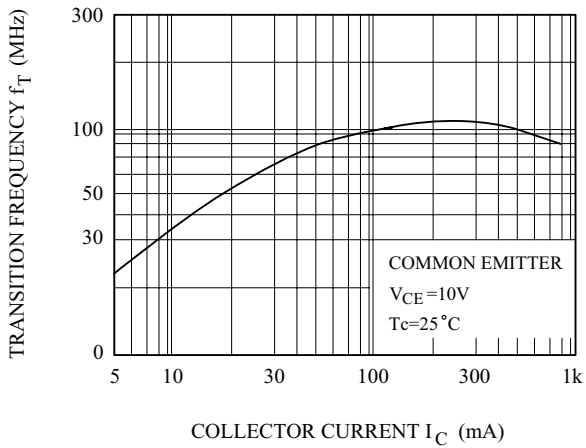

SAFE OPERATING AREA

