

ULTRA-HIGH SPEED SWITCHING APPLICATIONS  
ANALOG SWITCH APPLICATIONS


### FEATURES

- 2.5 Gate Drive.
- Low Threshold Voltage :  $V_{th} = -0.5 \sim -1.5V$ .
- High Speed.
- Small Package.
- Enhancement-Mode.

### MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	$V_{DS}$	-30	V
Gate-Source Voltage	$V_{GSS}$	$\pm 20$	V
DC Drain Current	$I_D$	-50	mA
Drain Power Dissipation	$P_D$	100	mW
Channel Temperature	$T_{ch}$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C



### EQUIVALENT CIRCUIT



THIS TRANSISTOR IS ELECTROSTATIC SENSITIVE DEVICE.  
PLEASE HANDLE WITH CAUTION.


### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current	$I_{GSS}$	$V_{GS} = \pm 16V, V_{DS} = 0V$	-	-	$\pm 1$	$\mu A$
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = -100 \mu A, V_{GS} = 0V$	-30	-	-	V
Drain Cut-off Current	$I_{DSS}$	$V_{DS} = -30V, V_{GS} = 0V$	-	-	-1	$\mu A$
Gate Threshold Voltage	$V_{th}$	$V_{DS} = -3V, I_D = -0.1mA$	-0.5	-	-1.5	V
Forward Transfer Admittance	$ Y_{fs} $	$V_{DS} = -3V, I_D = -10mA$	15	-	-	mS
Drain-Source ON Resistance	$R_{DS(ON)}$	$I_D = -10mA, V_{GS} = -2.5V$	-	20	40	$\Omega$
Input Capacitance	$C_{iss}$	$V_{DS} = -3V, V_{GS} = 0V, f = 1MHz$	-	10.4	-	pF
Reverse Transfer Capacitance	$C_{rss}$	$V_{DS} = -3V, V_{GS} = 0V, f = 1MHz$	-	2.8	-	pF
Output Capacitance	$C_{oss}$	$V_{DS} = -3V, V_{GS} = 0V, f = 1MHz$	-	8.4	-	pF
Switching Time	Turn-on Time	$t_{on}$	-	0.15	-	$\mu S$
	Turn-off Time	$t_{off}$	-	0.13	-	$\mu S$

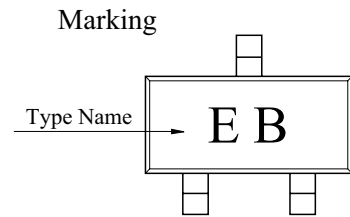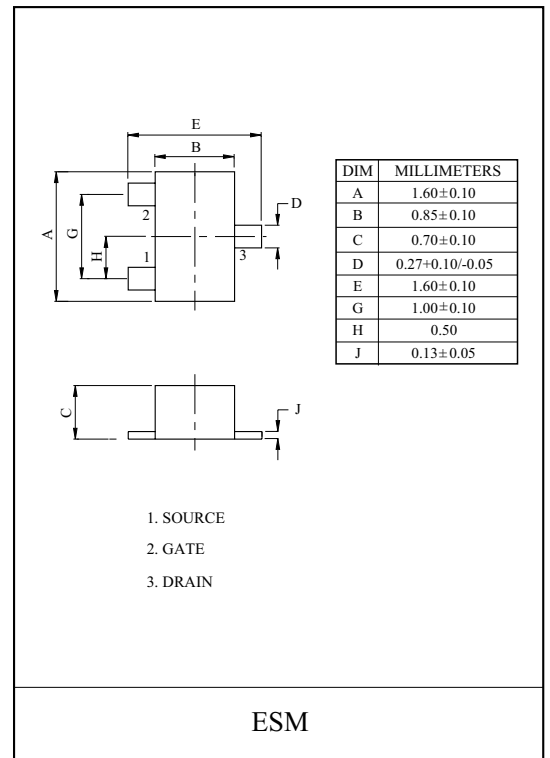


# KTJ6131E


$I_D - V_{DS}$

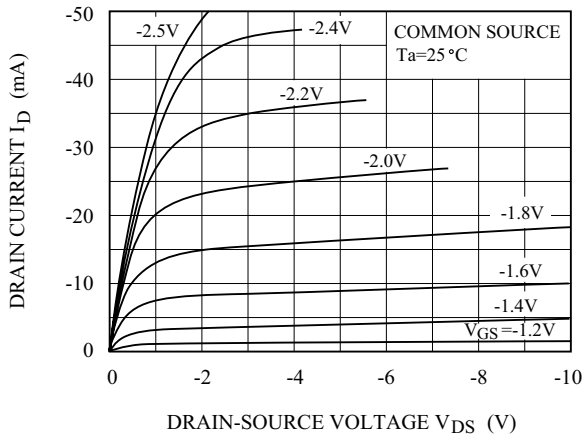


$I_D - V_{DS}$   
(LOW VOLTAGE REGION)

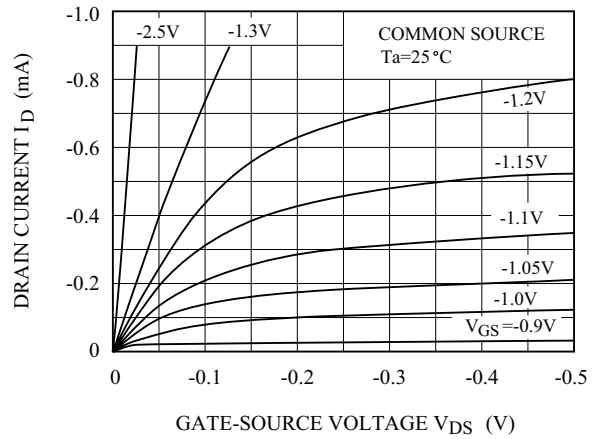


$I_{DR} - V_{DS}$

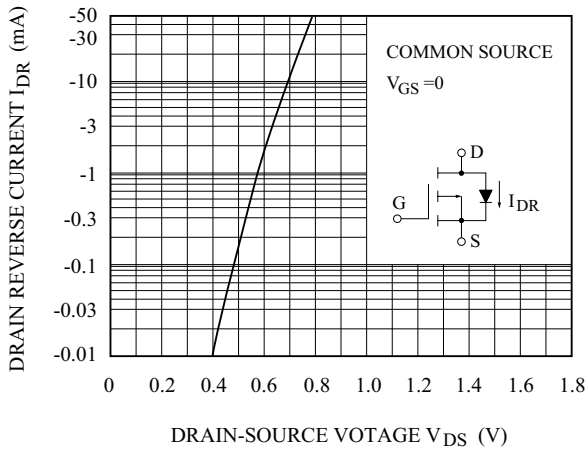


$I_D - V_{GS}$

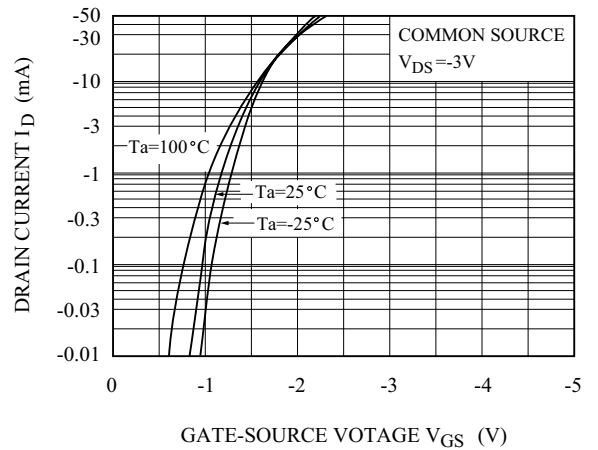

$|Y_{fs}| - I_D$

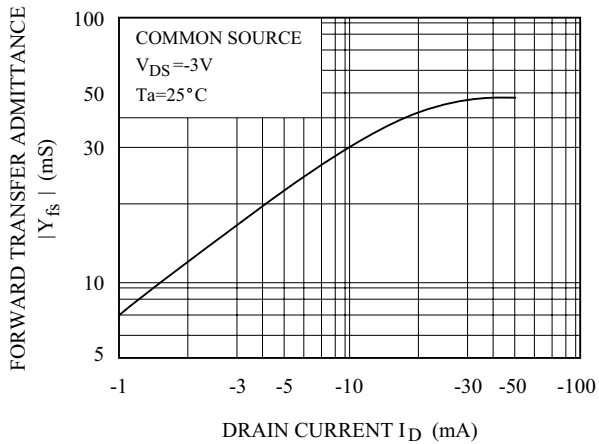


C - V<sub>DS</sub>

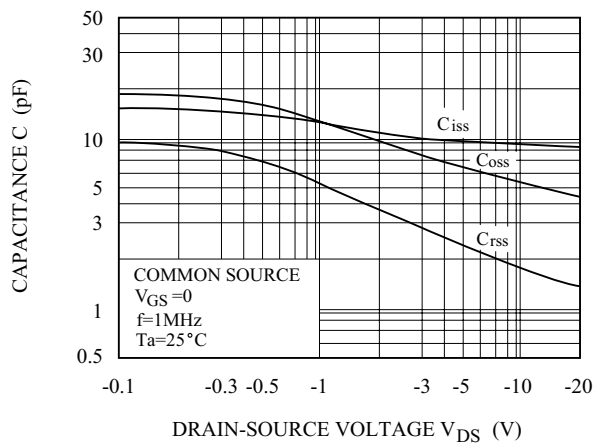


# KTJ6131E


$V_{DS(ON)} - I_D$

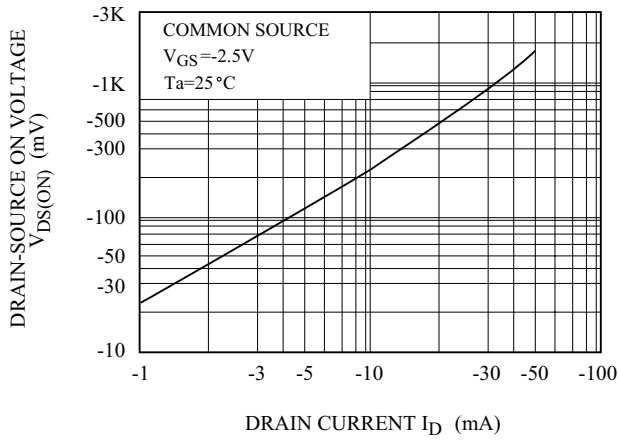

$t - I_D$

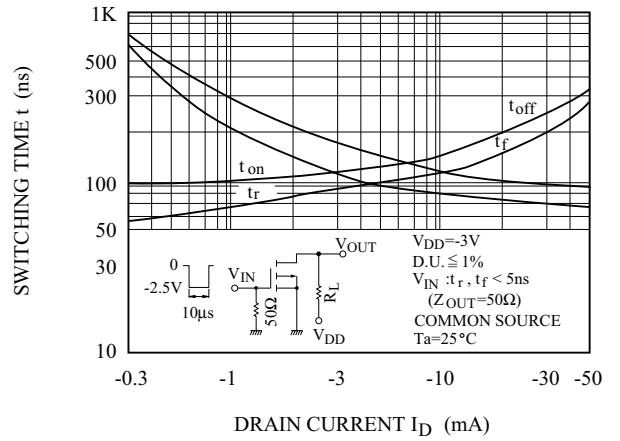

$P_D - T_a$

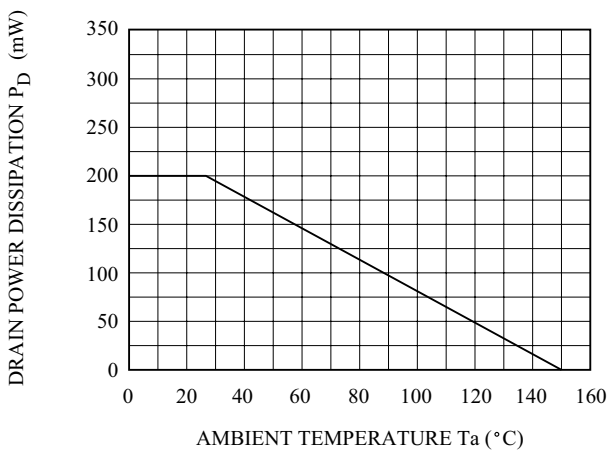

## SWITCHING TIME TEST CIRCUIT

