



## L1186

Preliminary

CMOS IC

### 600mA CMOS LDO


#### DESCRIPTION

The UTC **L1186** is a CMOS positive linear regulator. One of its features is the very low quiescent current typical as low as 30µA and its dropout voltage is extremely low with 600mA output current.

The internal circuit includes thermal shutdown and current fold-back to prevent device failure when the circuit is operated in the bad conditions.

In application, the UTC **L1186** needs a low noise, regulated supply. For stable operation, the output capacitance value should be 2.2µF or more.

The UTC **L1186** is an ideal for battery applications, such as instrumentations, portable electronics, wireless devices, cordless phones, PC peripherals, and battery powered widgets.

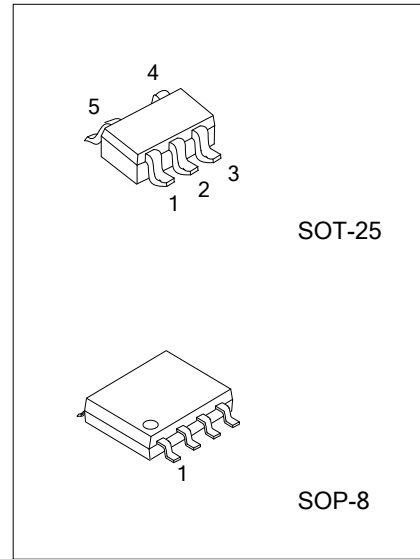

#### FEATURES

- \* Accurate to Within 1.5%
- \* Quiescent Current: 30µA
- \* Internal Over-Temperature Shutdown
- \* With Current Limiting
- \* Internal Short Circuit Current Fold-Back
- \* With Noise Reduction Bypass Capacitor
- \* Has Power-Saving Shutdown Mode
- \* Very Low Temperature Coefficient

#### ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
L1186L-xx-AF5-R	L1186G-xx-AF5-R	SOT-25	Tape Reel
L1186L-xx-S08-A-R	L1186G-xx-S08-A-R	SOP-8	Tape Reel
L1186L-xx-S08-B-R	L1186G-xx-S08-B-R	SOP-8	Tape Reel




Note: xx: Output Voltage, refer to Marking Information.

<p>L1186G-xx-AF5-X-R</p> <p>(1) Packing Type (2) Pin Assignment (3) Package Type (4) Output Voltage Code (5) Lead Free</p>	<p>(1) R: Tape Reel (2) refer to Pin Assignment (FOR SOP-8) (3) AF5: SOT-25, S08: SOP-8 (4) xx: Refer to Marking Information (5) L: Lead Free G: Halogen Free</p>
--	---

## MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-25	15 :1.5V 28 :2.8V	<p>L: Lead Free G: Halogen Free Voltage Code</p>
SOP-8	AD:ADJ	<p>DATE CODE L: Lead Free G: Halogen Free Lot Code</p> <p>PIN CODE Voltage Code</p>


## PIN CONFIGURATION

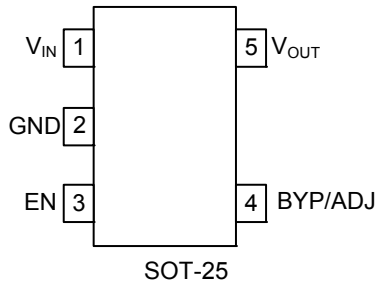

## PIN DESCRIPTION

PIN NO			PIN NAME	DESCRIPTION
SOT-25	SOP-8(A)	SOP-8(B)		
1	1	8	V <sub>IN</sub>	Input for voltage input.
2	2,3,6,7	3	GND	Ground.
3	4	5	EN	Enable pin.
4	5	2	BYP/ADJ	Noise Reduction Bypass Capacitor/ Adjusted Voltage
5	8	1	V <sub>OUT</sub>	Output voltage pin
--	--	4,6,7	NC	No connection

■ BLOCK DIAGRAM

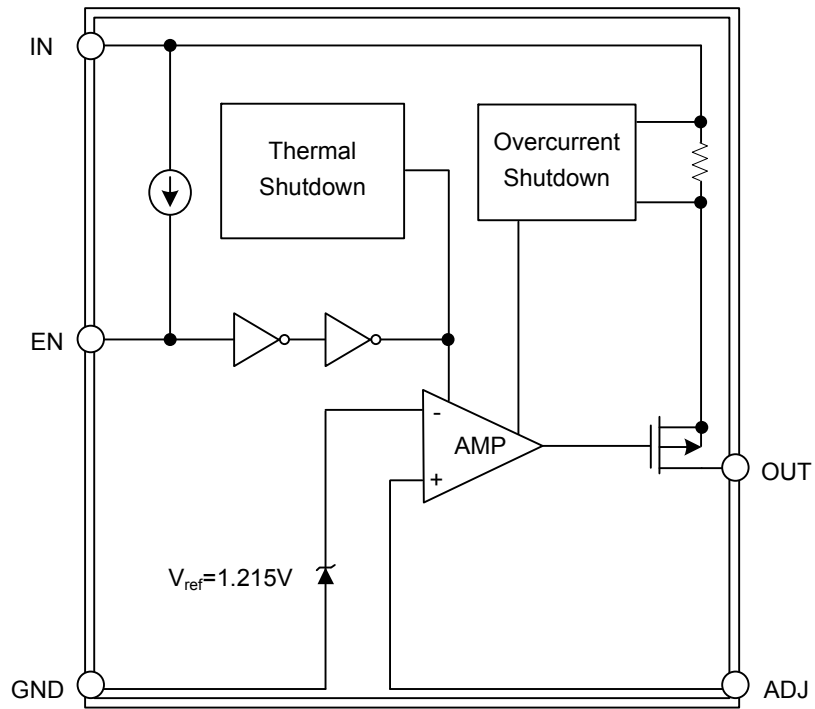

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		$V_{IN}$	8	V
Output Voltage		$V_{OUT}$	GND-0.3 ~ $V_{IN}+0.3$	V
Output Current		$I_{OUT}$	$\frac{P_D}{V_{IN} - V_{OUT}}$	A
Power Dissipation	SOT-25	$P_D$	400	mW
	SOP-8		600	
Junction Temperature		$T_J$	150	°C
Operating Temperature		$T_{OPR}$	-40~+85	°C
Storage Temperature		$T_{STG}$	-65~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-25	$\theta_{JA}$	260	°C/W
	SOP-8		200	
Junction to Case (Note)	SOT-25	$\theta_{JC}$	81	°C/W
	SOP-8		65	

Note:  $\theta_{JC}$  on center of molding compound if IC has on tab

### ■ ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ , unless otherwise noted.)

#### Fixed Voltage

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$		Note1		7	V
Output Voltage Accuracy	$V_{OUT}$	$I_{OUT}=1\text{mA}$	-1.5		1.5	%
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$I_{OUT}=1\text{mA}$ $V_{IN}=V_{OUT}+1\sim V_{OUT}+2$	1.4V < $V_{OUT} \leq 2.0\text{V}$	-0.15	0.15	%
			2.0V < $V_{OUT} < 4.0\text{V}$	-0.1	0.02	0.1
Load Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$I_{OUT}=1\text{mA} \sim 600\text{mA}$		0.2	1	%
Output Current	$I_{OUT}$	$V_{OUT} > 1.2\text{V}$	600			mA
Current Limit	$I_{LIMIT}$	$V_{OUT} > 1.2\text{V}$	600	800		mA
Short Circuit Current	$I_{SC}$	$V_{OUT} < 0.8\text{V}$		300	600	mA
Quiescent Current	$I_Q$	$I_{OUT}=0\text{mA}$		30	50	$\mu\text{A}$
Ground Pin Current	$I_{GND}$	$I_{OUT}=1\text{mA} \sim 600\text{mA}$		35		$\mu\text{A}$
Dropout Voltage	$V_D$	$I_{OUT} = 600\text{mA}$ $V_{OUT} = V_{O(NOM)} - 2.0\%$	1.4V < $V_{O(NOM)} \leq 2.0\text{V}$		1400	mV
			2.0V < $V_{O(NOM)} \leq 2.8\text{V}$		800	mV
Over Temperature Shutdown	OTS			150		°C
Over Temperature Hysteresis	OTH			30		°C
Temperature Coefficient of Output Voltage	$T_C V_O$			30		ppm/°C
Power Supply Rejection	PSRR	$I_{OUT} = 100\text{mA}$ $C_{OUT} = 2.2\mu\text{F}$ ceramic $C_{BYP} = 0.01\mu\text{F}$	$f = 1\text{kHz}$	75		dB
			$f = 10\text{kHz}$	55		dB
			$f = 100\text{kHz}$	30		dB
Output Voltage Noise	eN	$f = 10\text{Hz} \sim 100\text{kHz}$ , $I_{OUT} = 10\text{mA}$ $C_{OUT} = 2.2\mu\text{F}$ , $C_{BYP} = 0.1\mu\text{F}$		30		$\mu\text{Vrms}$
EN Input Threshold	$V_{EH}$	$V_{IN} = 2.7\text{V} \sim 7\text{V}$	2.0		$V_{IN}$	V
	$V_{EL}$	$V_{IN} = 2.7\text{V} \sim 7\text{V}$	0		0.4	V
EN Input Bias Current	$I_{EH}$	$V_{EN} = V_{IN}$ , $V_{IN} = 2.7\text{V} \sim 7\text{V}$			0.1	$\mu\text{A}$
	$I_{EL}$	$V_{EN} = 0\text{V}$ , $V_{IN} = 2.7\text{V} \sim 7\text{V}$			0.5	$\mu\text{A}$
Shutdown Supply Current	$I_{SD}$	$V_{IN} = 5\text{V}$ , $V_{OUT} = 0\text{V}$ , $V_{EN} < V_{EL}$		0.5	1	$\mu\text{A}$
PG Leakage Current	$I_{LC}$	$V_{PG} = 7\text{V}$			1	$\mu\text{A}$

■ ELECTRICAL CHARACTERISTICS (Cont.)

**Adjusted Voltage**


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$		Note1		7	V
Reference Voltage	$V_{REF}$		1.196	1.215	1.234	V
Output Voltage Accuracy	$V_{OUT}$	$I_{OUT}=1mA$	-1.5		1.5	%
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$V_{IN}=V_{OUT}+V_D \sim 7V, I_{OUT}=1mA$	-0.15		0.15	%
Load Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}}$	$V_{IN}=V_{OUT}+V_D, I_{OUT}=1mA \sim 600mA$		0.2	1	%
Output Current	$I_{OUT}$	$V_{OUT} > 1.3V$	600			mA
Current Limit	$I_{LIMIT}$	$V_{OUT} > 1.3V$	600	800		mA
Short Circuit Current	$I_{SC}$	$V_{OUT} < 0.8V$		300	600	mA
Adjusted Current	$I_{ADJ}$	$I_{OUT}=0mA$		30	50	$\mu A$
Ground Pin Current	$I_{GND}$	$I_{OUT}=1mA \sim 600mA$		35		$\mu A$
Dropout Voltage	$V_D$	$V_{OUT}=V_{O(NOM)}-2.0\%, I_{OUT}=600mA$			600	mV
Over Temperature Shutdown	OTS			150		$^{\circ}C$
Over Temperature Hysteresis	OTH			30		$^{\circ}C$
Temperature Coefficient of Output Voltage	$T_C V_O$			30		ppm/ $^{\circ}C$
Power Supply Rejection	PSRR	$I_{OUT}=100mA$		40		dB
		$C_{OUT}=2.2\mu F$ ceramic	$f=1kHz$			
		$C_{BYP}=0.01\mu F$	$f=10kHz$		20	
Output Voltage Noise	eN	$f=10Hz \sim 100kHz, I_{OUT}=10mA$		30		$\mu V_{rms}$
		$C_{OUT}=2.2\mu F, C_{BYP}=0.1\mu F$				
EN Input Threshold	$V_{EH}$	$V_{IN}=2.7V \sim 7V$	2.0		$V_{IN}$	V
	$V_{EL}$	$V_{IN}=2.7V \sim 7V$	0		0.4	V
EN Input Bias Current	$I_{EH}$	$V_{EN}=V_{IN}, V_{IN}=2.7V \sim 7V$			0.1	$\mu A$
	$I_{EL}$	$V_{EN}=0V, V_{IN}=2.7V \sim 7V$			0.5	$\mu A$
Shutdown Supply Current	$I_{SD}$	$V_{IN}=5V, V_{OUT}=0V, V_{EN} < V_{EL}$		0.5	1	$\mu A$
PG Leakage Current	$I_{LC}$	$V_{PG}=7V$			1	$\mu A$

Notes: 1.  $V_{IN(MIN)}=V_{OUT}+V_D$


2. To prevent the Short Circuit Current protection feature from being prematurely activated, the input voltage must be applied before a current source load is applied.

■ TYPICAL APPLICATION CIRCUIT

Fixed Voltage

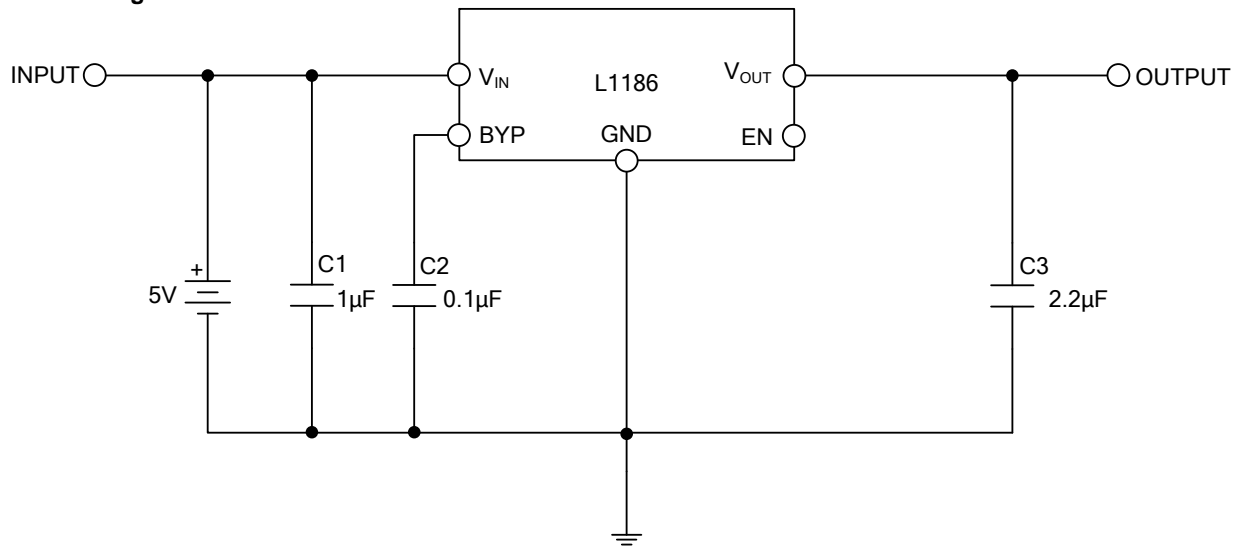

Adjusted Voltage

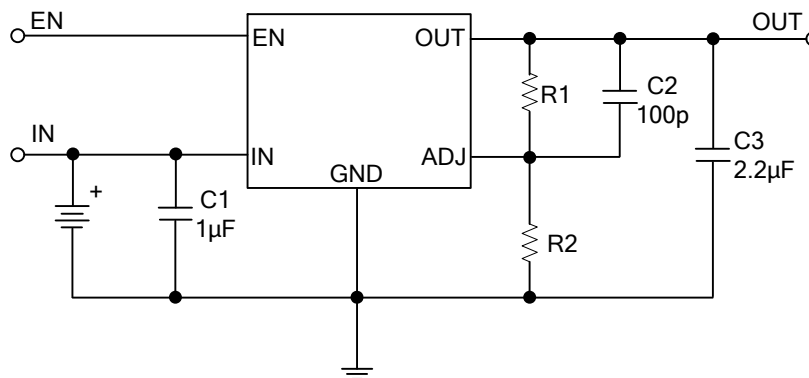

$$V_{OUT} = 1.215 ( R_1/R_2 + 1 )$$

C2 is unnecessary if  $R_1$  or  $R_2 < 20 \text{ K}\Omega$

$R_1$  and  $R_2$  use resistance value within 1% accuracy for correct for correct  $V_{OUT}$

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.