

The RF Line

High Output Power Doubler

860 MHz CATV Amplifier


MHW8185

- Specified for 77, 110 and 128-Channel Performance
- Broadband Power Gain — @ f = 40–860 MHz
G_p = 19.4 dB (Typ)
- Broadband Noise Figure
NF = 7 dB (Typ) @ 860 MHz
- Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization
- 7 GHz f_T Ion-Implanted Transistors

19.4 dB GAIN
860 MHz
128-CHANNEL
CATV AMPLIFIER

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V _{in}	+70	dBmV
DC Supply Voltage	V _{CC}	+28	Vdc
Operating Case Temperature Range	T _C	-20 to +100	°C
Storage Temperature Range	T _{stg}	-40 to +100	°C

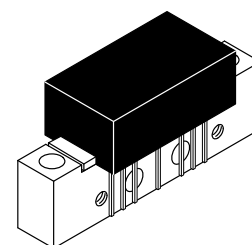


CASE 714Y-03, STYLE 1

ELECTRICAL CHARACTERISTICS (V_{CC} = 24 Vdc, T_C = +30°C, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
Frequency Range	BW	40	—	860	MHz	
Power Gain	G _p	50 MHz	18.3	19.3	dB	
		860 MHz	19	20.5		
Slope	S	0	.5	1.5	dB	
Gain Flatness (40–860 MHz, Peak to Valley)	—	—	0.3	1.0	dB	
Return Loss — Input/Output (Z ₀ = 75 Ohms)	IRL/ORL	@ 40 MHz	19	—	dB	
		@ f > 40 MHz (Derate)	—	—		0.006
Composite Second Order	CSO ₁₂₈ CSO ₁₁₀ CSO ₇₇	(V _{out} = +40 dBmV/ch., Worst Case) 128-Channel FLAT	—	-70	-62	dBc
		(V _{out} = +44 dBmV/ch., Worst Case) 110-Channel FLAT	—	-72	—	
		77-Channel FLAT	—	-80	—	
Cross Modulation Distortion @ Ch 2	XMD ₁₂₈ XMD ₁₁₀ XMD ₇₇	(V _{out} = +40 dBmV/ch., FM = 55 MHz) 128-Channel FLAT	—	-72	-64	dBc
		(V _{out} = +44 dBmV/ch., FM = 55 MHz) 110-Channel FLAT	—	-66	—	
		77-Channel FLAT	—	-69	—	
Composite Triple Beat	CTB ₁₂₈ CTB ₁₁₀ CTB ₇₇	(V _{out} = +40 dBmV/ch., Worst Case) 128-Channel FLAT	—	-67	-64	dBc
		(V _{out} = +44 dBmV/ch., Worst Case) 110-Channel FLAT	—	-64	—	
		77-Channel FLAT	—	-70	—	
Noise Figure	NF	50 MHz	—	5.0	6.0	dB
		550 MHz	—	5.8	—	
		750 MHz	—	6.2	—	
		860 MHz	—	7.0	8.0	
DC Current (V _{DC} = 24 V, T _C = 30°C)	I _{DC}	365	400	435	mA	

PACKAGE DIMENSIONS

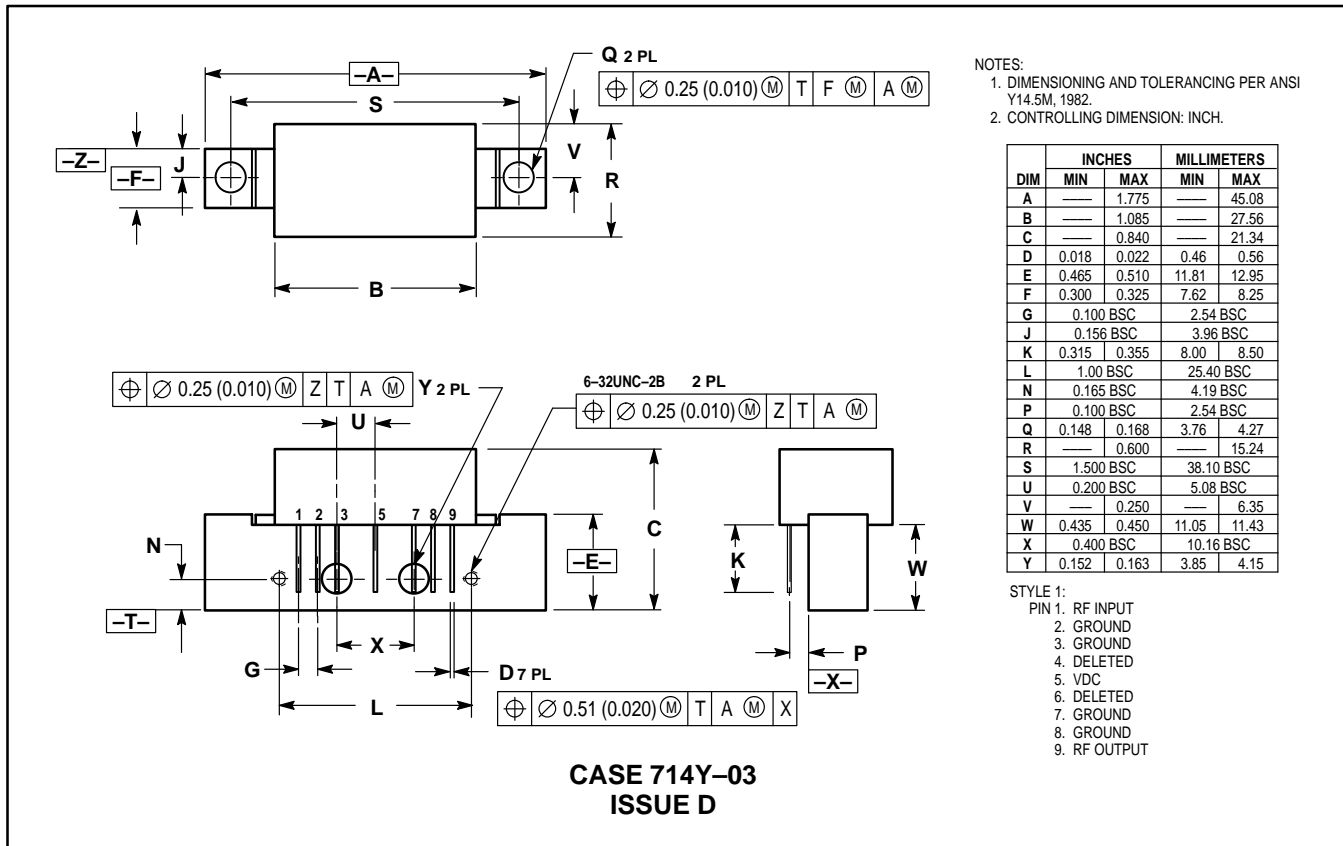

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
 – http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

HOME PAGE: http://motorola.com/sps/

