

# D24L THRU D220L

## 2.0AMP SURFACE MOUNT LOW VF SCHOTTKY RECTIFIER


### Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High temperature soldering guaranteed:  
260 °C/10 seconds, 0.375"(9.5mm) lead length,  
5 lbs. (2.3kg) tension

### Mechanical Data

- Case: SOD-123FL, molded plastic
- Terminals: plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any

### SOD-123FL

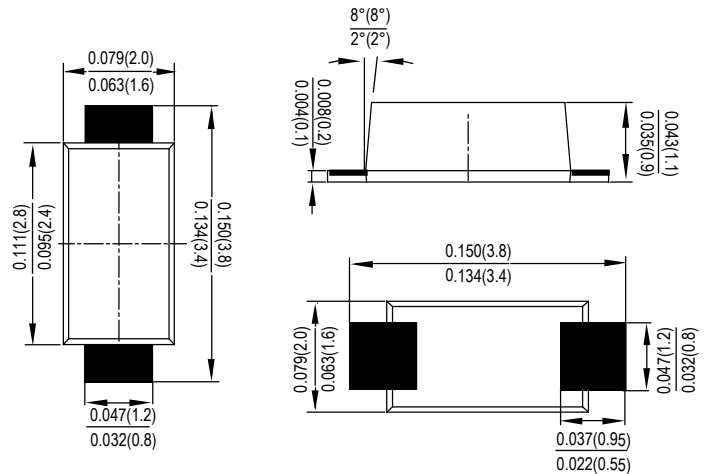

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	D24L	D26L	D28L	D210L	D215L	D220L	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub>							V
	V <sub>RWM</sub>	40	60	80	100	150	200	
	V <sub>DC</sub>							
RMS Reverse Voltage	V <sub>RMS</sub>	28	42	56	70	105	140	V
Average Rectified Output Current @T <sub>A</sub> =90 °C	I <sub>o</sub>	2.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load(JEDEC Method)	I <sub>FSM</sub>	50						A
Forward Voltage per element @IF=2.0A	V <sub>FM</sub>	0.45	0.5	0.75		0.85		V
Peak Reverse Current @T <sub>A</sub> =25 °C At Rated DC Blocking Voltage @T <sub>A</sub> =100 °C	I <sub>R</sub>	0.3		0.1				mA
		10		5				
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	110		80				pF
Operating junction temperature range	T <sub>J</sub>	-55to+150						°C
Operating and Storage Temperature Range	T <sub>STG</sub>	-55to+150						°C

Note:1. Measured at 1MHZ and applied reverse voltage of 4.0V D.C.



# D24L THRU D220L

FIG. 1- FORWARD CURRENT DERATING CURVE

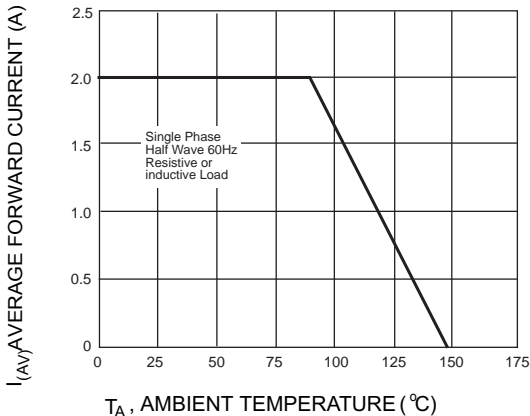


FIG. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

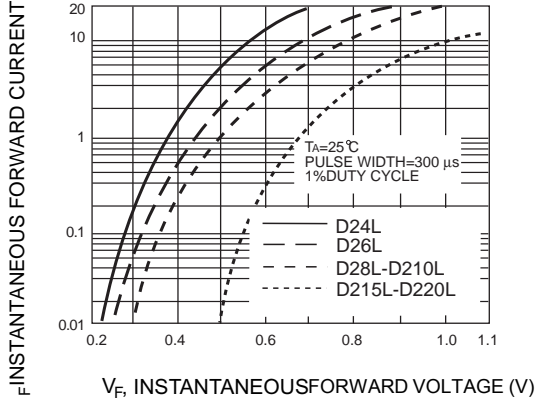


FIG. 3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

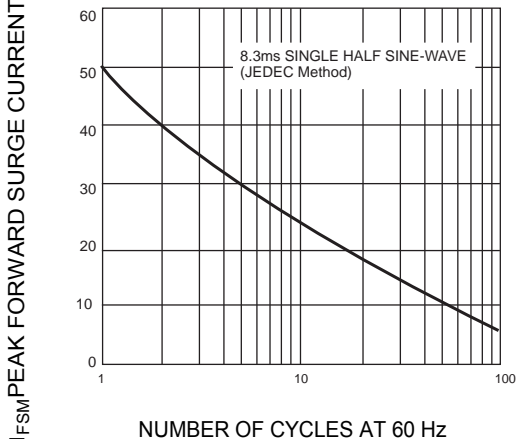


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

