



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, CA 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

**SFT2222A2
Series**

**Dual Microminiature Package
800 mA 75 Volts
Dual NPN Transistor**

DESIGNER'S DATA SHEET

Part Number / Ordering Information^{1/}


SFT2222A2

\square Screening^{2/} = Commercial
 TX= TX Level
 TXV= TXV Level
 S= S Level

\square Package GW= Gullwing

- Features:**
- High Speed Switching Transistor
 - Multiple Devices Reduce Board Space
 - High Power Dissipation: Up to 660 mW
 - Replacement for 2N2222AU
 - TX, TXV, S-Level Screening Available^{2/}
 - NPN Complimentary Parts Available (SFT2907A2)

| Maximum Ratings | Symbol | Value | Units |
|--|------------------------------------|-------------|-------|
| Collector – Emitter Voltage | V _{CEO} | 50 | Volts |
| Collector – Base Voltage | V _{CBO} | 75 | Volts |
| Emitter – Base Voltage | V _{EBO} | 6 | Volts |
| Continuous Collector Current | I _C | 800 | mA |
| Power Dissipation @ T _A = 25°C | Per Device Total | 500 | mW |
| | | 660 | |
| Operating & Storage Temperature | T _{OP} & T _{stg} | -65 to +200 | °C |
| Maximum Thermal Resistance (Junction to PCB) | R _{θJ-PCB} | 265 | °C/W |

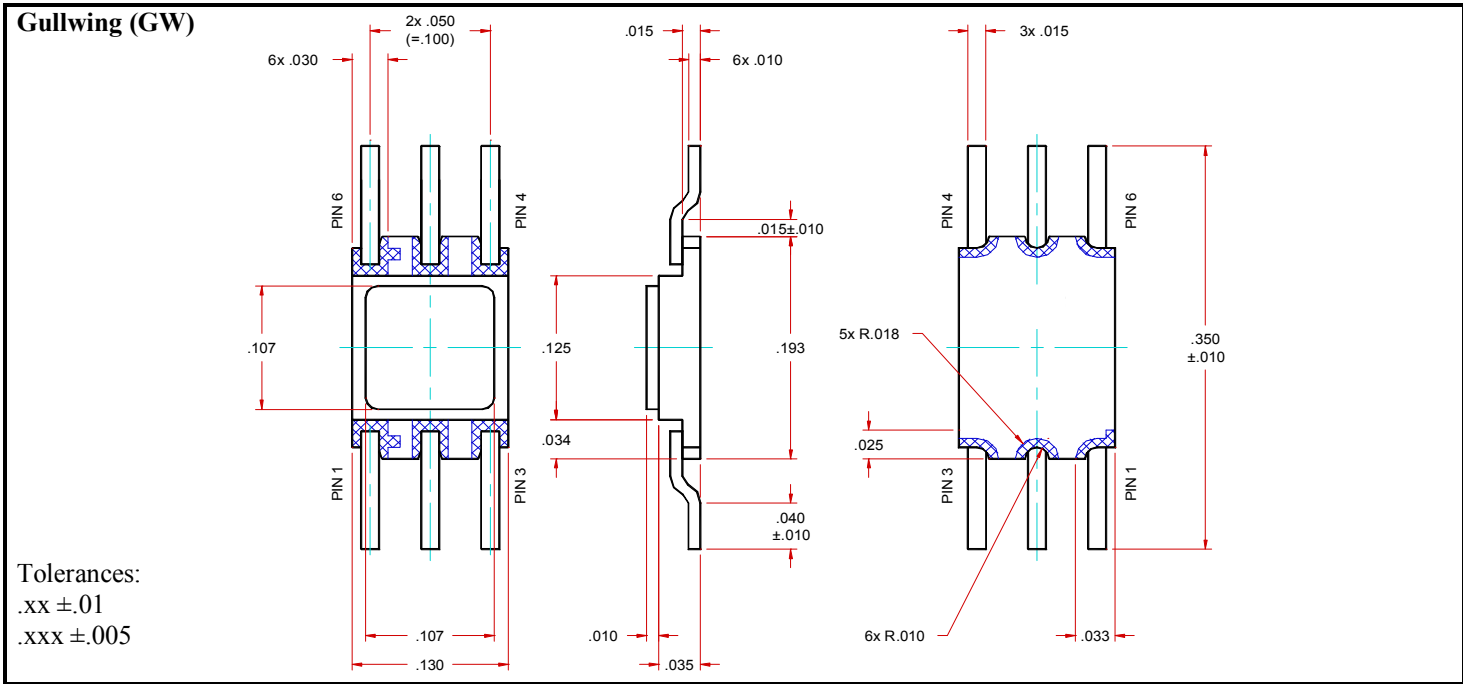



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

| |
|---------------------|
| SFT2222A2 Series |
|---------------------|

| Electrical Characteristic ^{4/} | Symbol | Min | Max | Units |
|--|---|------------------------------------|--------------------------------|---------------|
| Collector – Emitter Sustaining Voltage | $I_C = 10 \text{ mA}$ BV_{CEO} | 50 | — | Volts |
| Collector Cutoff Current | $V_{CE} = 50 \text{ V}$ I_{CES} | — | 50 | nA |
| Collector Cutoff Current | $V_{CB} = 60 \text{ V}$ $V_{CB} = 75 \text{ V}$ $V_{CB} = 60 \text{ V}, T_A = 150^\circ\text{C}$ I_{CBO} | — | 0.01 10 10 | μA |
| Emitter Cutoff Current | $V_{EB} = 4.0 \text{ V}$ $V_{EB} = 6.0 \text{ V}$ I_{EBO} | — | 0.01 10 | μA |
| DC Forward Current Transfer Ratio ^{5/} | $V_{CE} = 10 \text{ V}, I_C = 0.1 \text{ mA}$ $V_{CE} = 10 \text{ V}, I_C = 1.0 \text{ mA}$ $V_{CE} = 10 \text{ V}, I_C = 10 \text{ mA}$ $V_{CE} = 10 \text{ V}, I_C = 150 \text{ mA}$ $V_{CE} = 10 \text{ V}, I_C = 500 \text{ mA}$ $V_{CE} = 10 \text{ V}, I_C = 10 \text{ mA}, T_A = -55^\circ\text{C}$ H_{FE} | 50 75 100 100 30 35 | — 325 — 300 — — | |
| Small-signal Forward Current Transfer Ratio | $V_{CE} = 10 \text{ V}, I_C = 1.0 \text{ mA}, f = 1 \text{ kHz}$ h_{fe} | 50 | — | |
| Collector – Emitter Saturation Voltage ^{5/} | $I_C = 150 \text{ mA}, I_B = 15 \text{ mA}$ $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$ $V_{CE(Sat)}$ | — — | 0.3 1.0 | Volts |
| Base – Emitter Saturation Voltage ^{5/} | $I_C = 150 \text{ mA}, I_B = 15 \text{ mA}$ $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$ $V_{BE(Sat)}$ | 0.6 — | 1.2 2.0 | Volts |
| Frequency Transition | $V_{CE} = 20 \text{ V}, I_C = 20 \text{ mA}, f = 100 \text{ MHz}$ f_T | 250 | — | MHz |
| Switching Times | $V_{CC} = 30 \text{ V}, I_C = 150 \text{ mA}$ $I_{B1} = I_{B2} = 15 \text{ mA}, V_{BE(off)} = 3 \text{ V}$ t_{on} t_{off} | — — | 35 300 | ns |
| Output Capacitance | $V_{CE} = 10 \text{ V}, f = 1 \text{ MHz}$ C_{ob} | — | 8.0 | pF |
| Input Capacitance | $V_{CE} = 0.5 \text{ V}, f = 1 \text{ MHz}$ C_{ib} | — | 25 | pF |

NOTES:
 1/ For Ordering Information, Price, and Availability Contact Factory.
 2/ Screening based on MIL-PRF-19500. Screening flows available on request.
 3/ For Package Outlines Contact Factory.
 4/ Unless Otherwise Specified, All Electrical Characteristics @ 25°C.
 5/ Pulse Test: Pulse Width= 300µsec, Duty Cycle= 2%

Available Part Numbers:
SFT2222A2GW

| PIN ASSIGNMENT | | | | | | |
|----------------|------------|-------|----------|------------|-------|----------|
| Package | Pin 1 | Pin 2 | Pin 3 | Pin 4 | Pin 5 | Pin 6 |
| GW | Collector1 | Base1 | Emitter1 | Collector2 | Base2 | Emitter2 |