

V _{RSM} V _{RRM}	I _{FRMS} (maximum values for continuous operation)			
	130 A	130 A	300 A	300 A
V	I _{FAV} (sin. 180; T _{case} = ... °C; 50 Hz)			
	60 A (94 °C)	60 A (94 °C)	160 A (86 °C)	160 A (86 °C)
400	-	-	SKFH 110 /04..	-
800	SKFH 40/08	SKFH 60/08..	SKFH 110 /08..	SKKD 160 M 08
1000	SKFH 40/10	SKFH 60/10..	SKFH 110 /10..	SKKD 160 M 10
1200	SKFH 40/12	SKFH 60/12..	SKFH 110 /12..	SKKD 160 M 12
1400	-	-	-	SKKD 160 M 14


Symbol	Conditions	SKFH 40 ¹⁾ SKFH 60 ¹⁾	SKKD 160 M SKFH 110 ¹⁾
I _{FAV}	sin. 180; T _{case} = 85 °C	73 A	163 A
I _{FSM}	T _{vj} = 25 °C	1800 A	7000 A
	T _{vjmax}	1500 A	6000 A
i ² t	T _{vj} = 25 °C	16000 A ² s	245000 A ² s
	T _{vjmax}	11000 A ² s	180000 A ² s
t _{rr}	T _{vj} = 25 °C; I _F = 1 A; -di _F /dt = 15 A/μs; V _R = 30 V	2 μs	2 μs
Q _{rr}	T _{vjmax} ; I _F = 100 A; -di _F /dt = 30 A/μs; V _R = 30 V	65 μC	65 μC
I _{RM}		35 A	45 A
I _R	T _{vj} = 25 °C; V _R = V _{RRM} T _{vjmax} ; V _R = V _{RRM}	1 mA 10 mA	2 mA 50 mA
V _F	T _{vj} = 25 °C; I _F = ... A	1,6 V (200 A)	1,5 V (400 A)
V _(TO)	T _{vjmax}	1,0 V	1,25 V
r _T		2 mΩ	0,5 mΩ
R _{thjc}	per diode/per module	0,4/0,2 °C/W ²⁾	0,19/0,095 °C/W ²⁾
R _{thch}		0,2/0,1 °C/W	0,06/0,03 °C/W
T _{vj}		-40 ... +125 °C	-40 ... +130 °C
T _{stg}		-40 ... +125 °C	-40 ... +130 °C
V _{isol}		a. c. 50 Hz; r.m.s.; 1 s/1 min.	3000 V ~ /2500 V ~ ²⁾
M ₁	Case to heatsink	5 Nm/44 lb. in. ± 15 %	5 Nm/44 lb. in. ± 15 %
M ₂	Busbars to terminals	3 Nm/26 lb. in. ± 15 %	9 Nm/80 lb. in. ± 15 %
w	approx.	120 g	800 g
Case	→ page B 2-12	A 8	
Case	→ page B 2-32	SKKD SKFH	A 16 A 14

Fast Thyristor/ Diode Modules

SEMIPACK® 1

SKFH 40

Diode data¹⁾



SKFH 60

Diode data¹⁾





SEMIPACK® 3

SKKD 160 M

SKFH 110

Diode data¹⁾

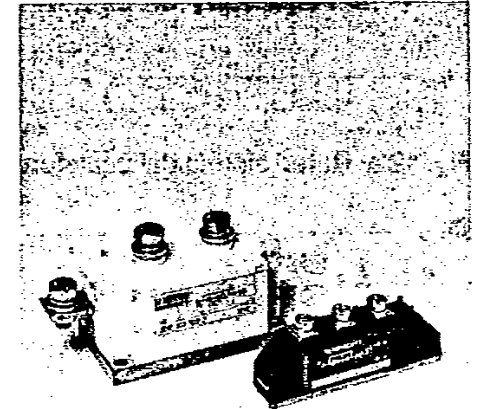

SKFH

SKKD

Features

- Heat transfer through ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- SKKD 160 M: Precious metal pressure contacts
- UL recognized, file no. E 63 532

Typical Applications

- Self-commutated inverters
- DC choppers
- AC motor speed control
- Inductive heating
- Uninterruptible power supplies
- Electronic welders
- General power switching applications

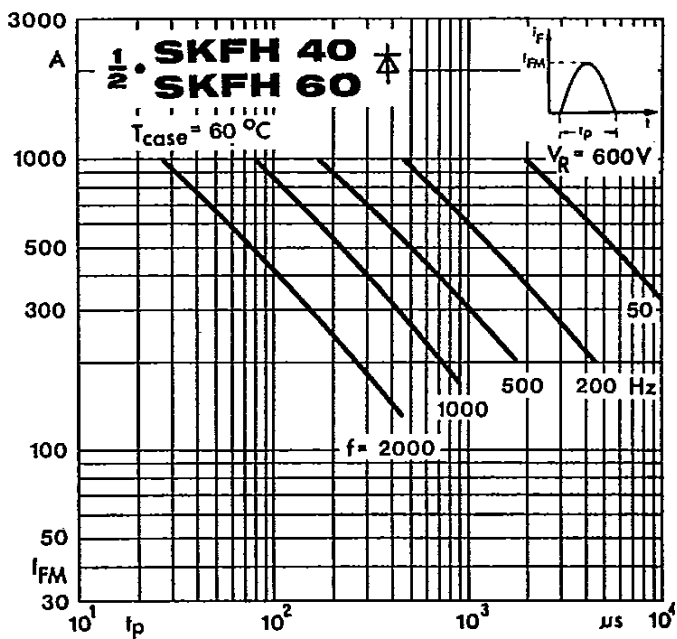


Fig. 12 a Rated sinusoidal peak forward current

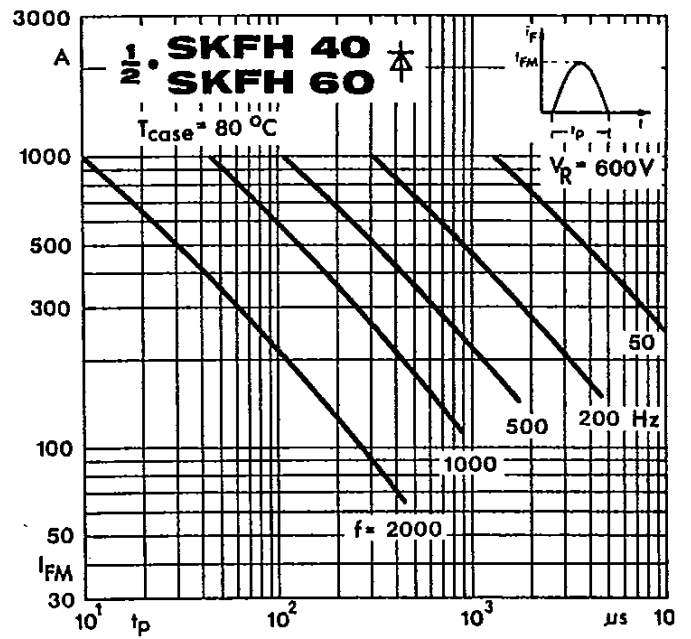


Fig. 12 b Rated sinusoidal peak forward current

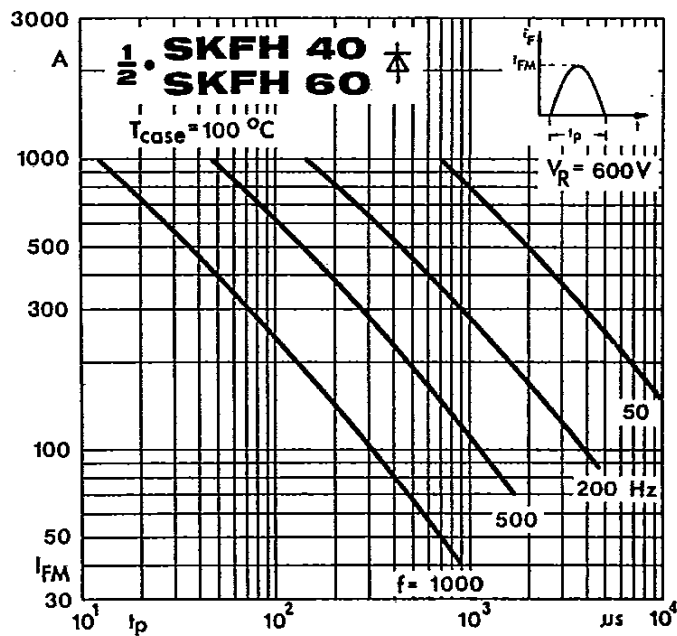


Fig. 12 c Rated sinusoidal peak forward current

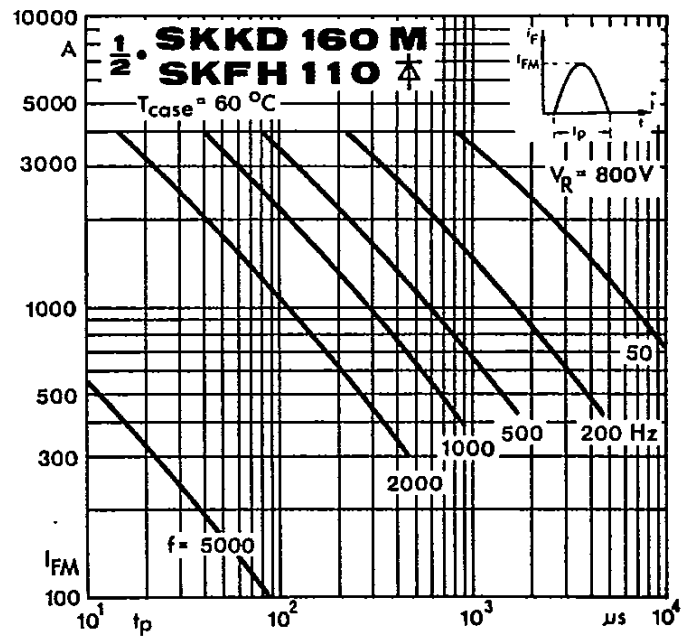


Fig. 12 d Rated sinusoidal peak forward current

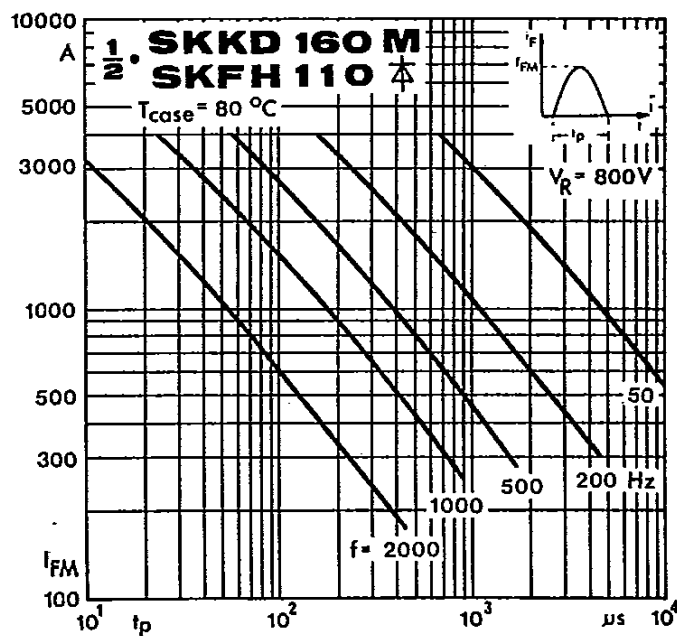


Fig. 12 e Rated sinusoidal peak forward current

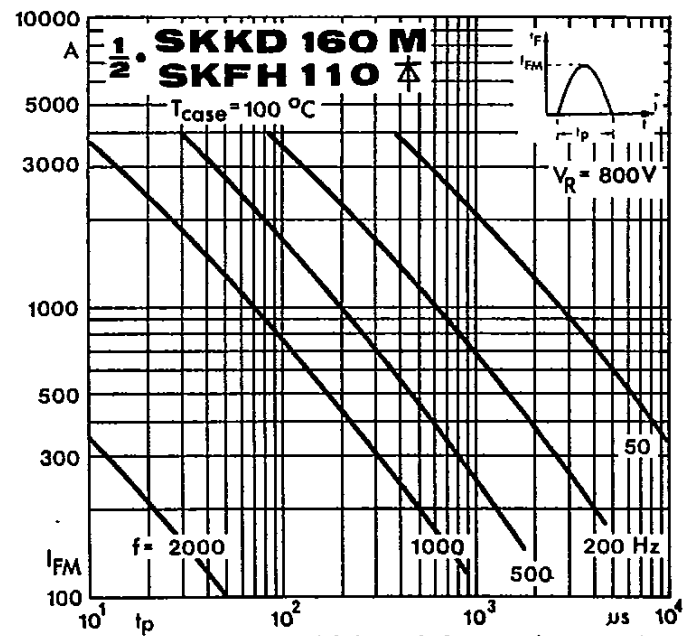


Fig. 12 f Rated sinusoidal peak forward current

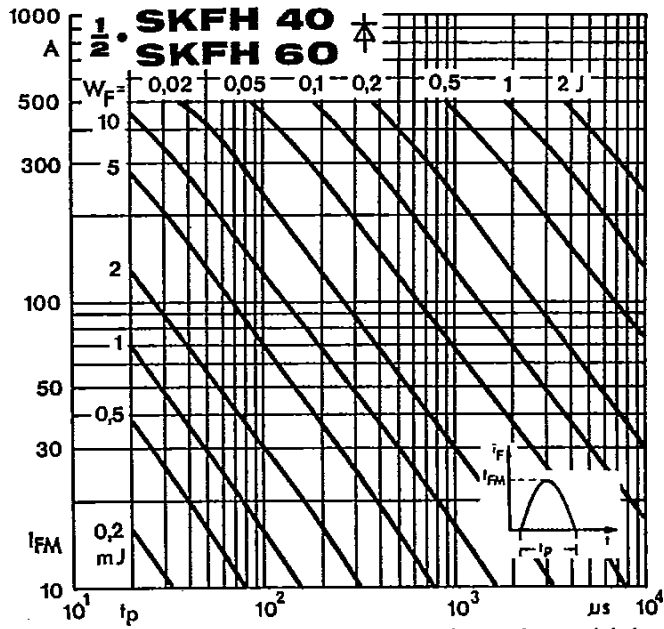


Fig. 13 a Forward energy dissipation, sinusoidal

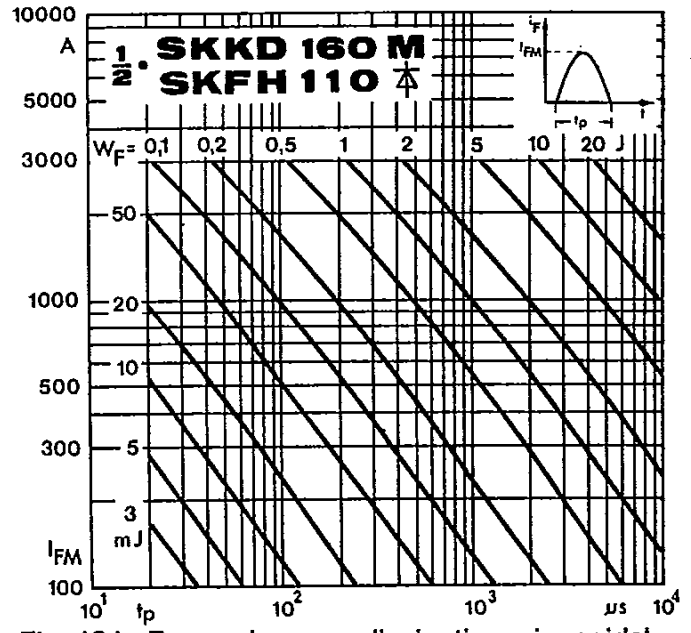


Fig. 13 b Forward energy dissipation, sinusoidal

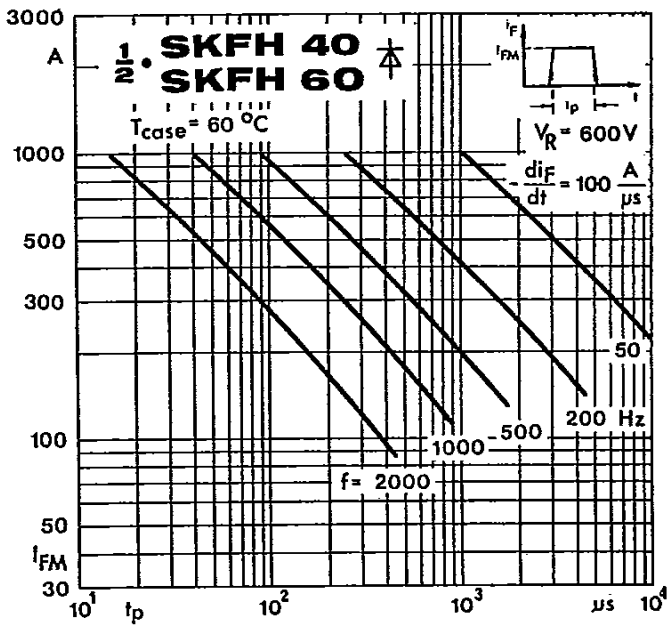


Fig. 14 a Rated rectangular peak forward current

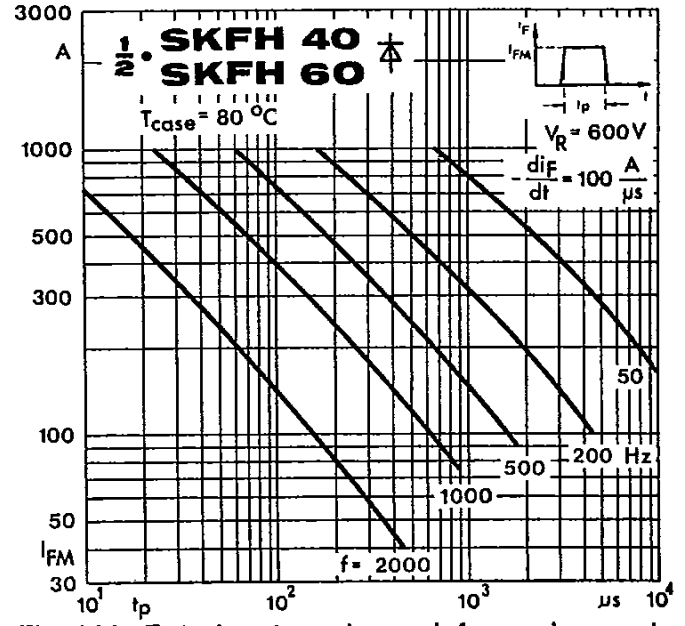


Fig. 14 b Rated rectangular peak forward current

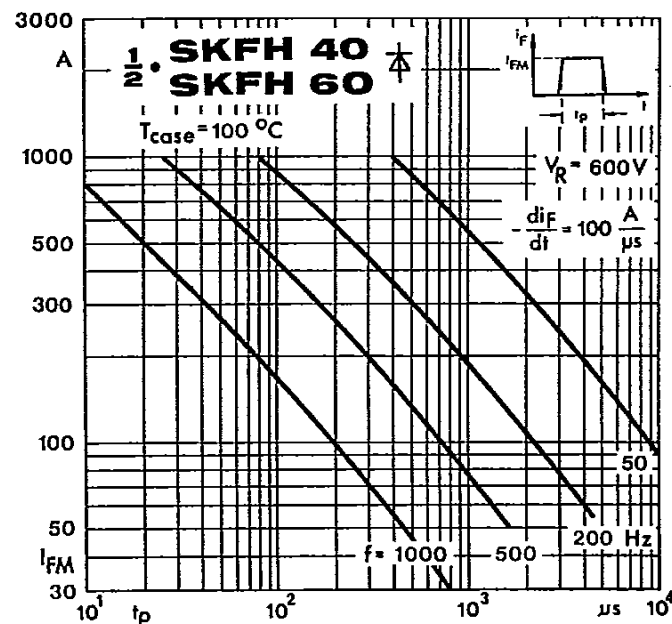


Fig. 14 c Rated rectangular peak forward current

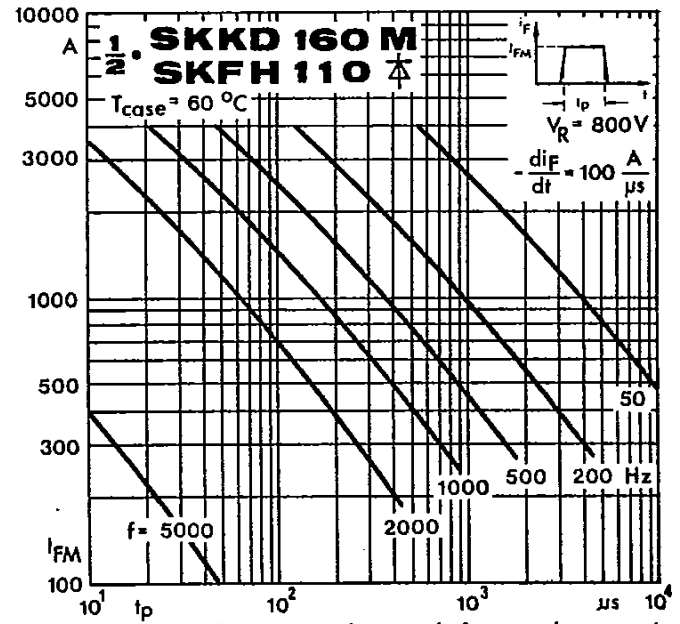


Fig. 14 d Rated rectangular peak forward current

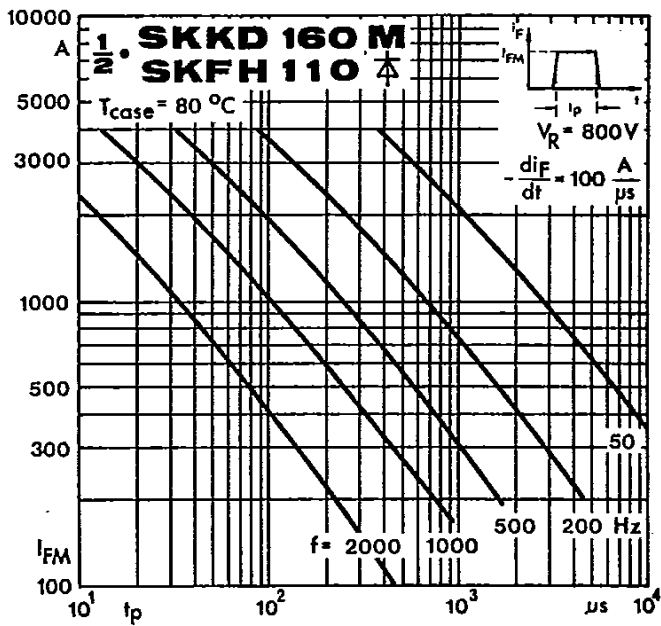


Fig. 14 e Rated rectangular peak forward current

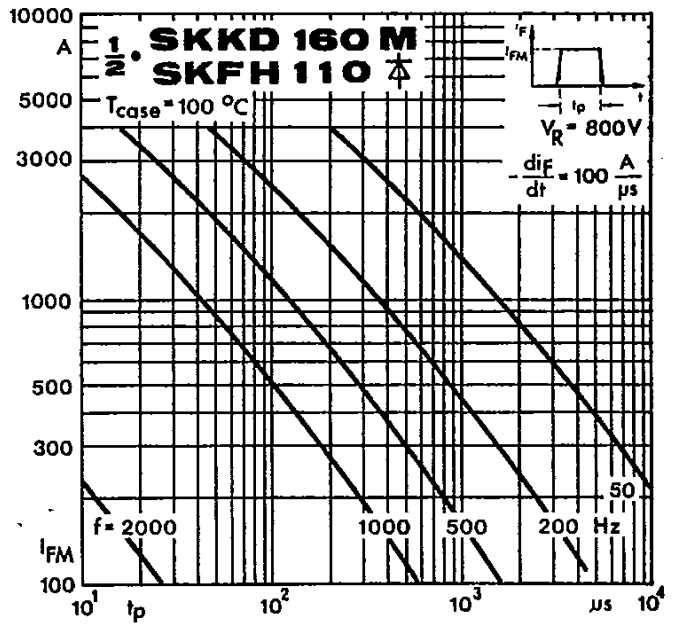


Fig. 14 f Rated rectangular peak forward current

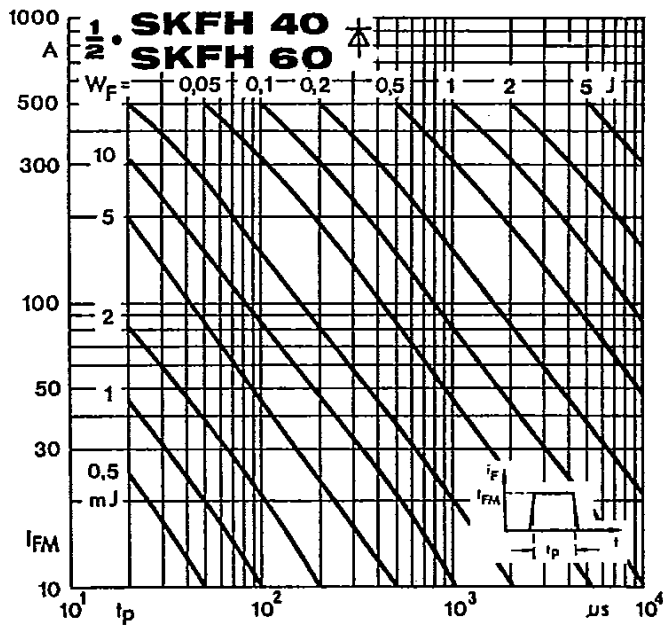


Fig. 15 a Forward energy dissipation, rectangular

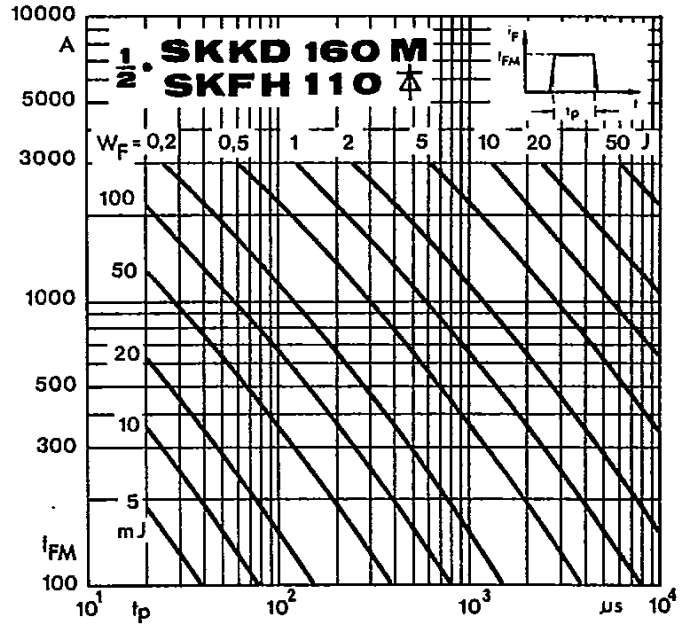


Fig. 15 b Forward energy dissipation, rectangular

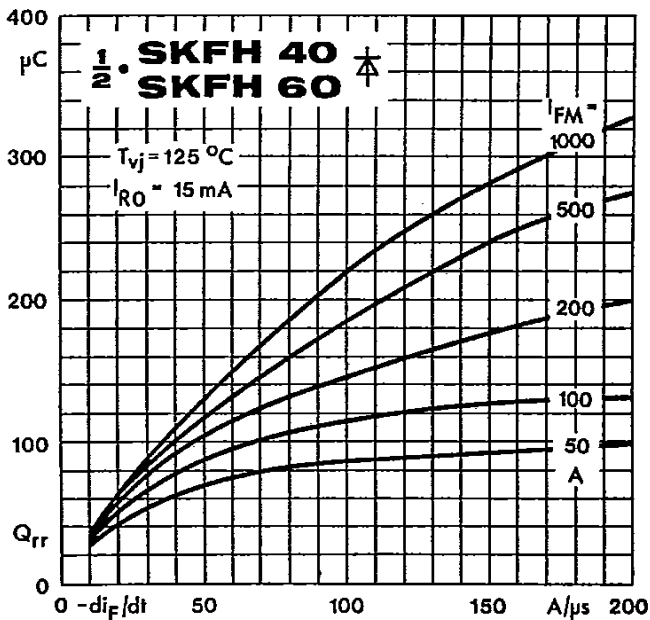


Fig. 16 a Recovered charge vs. current decrease

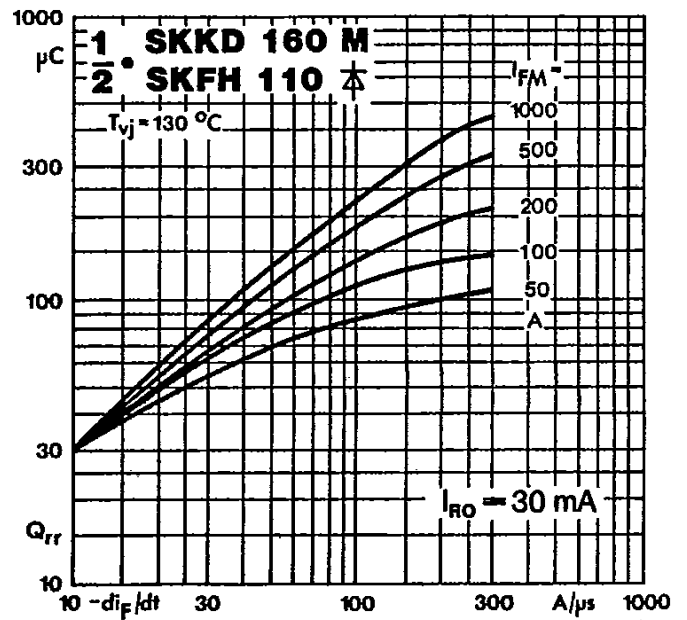


Fig. 16 b Recovered charge vs. current decrease

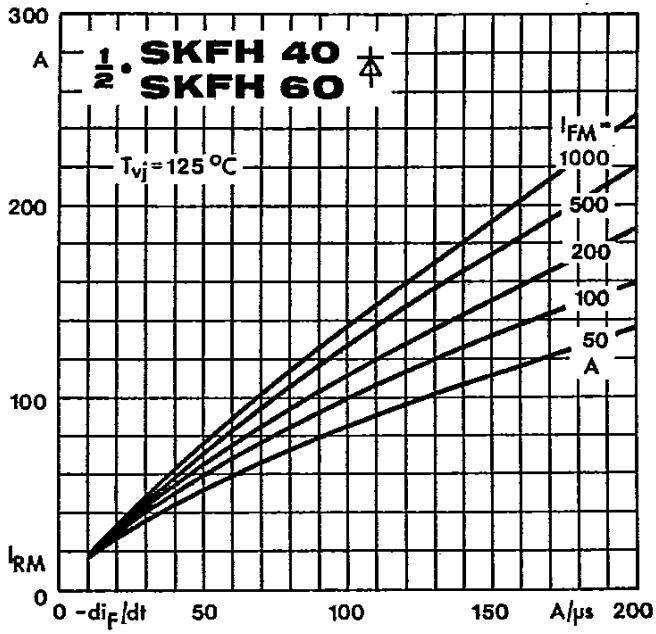


Fig. 17 a Peak recovery current vs. current decrease

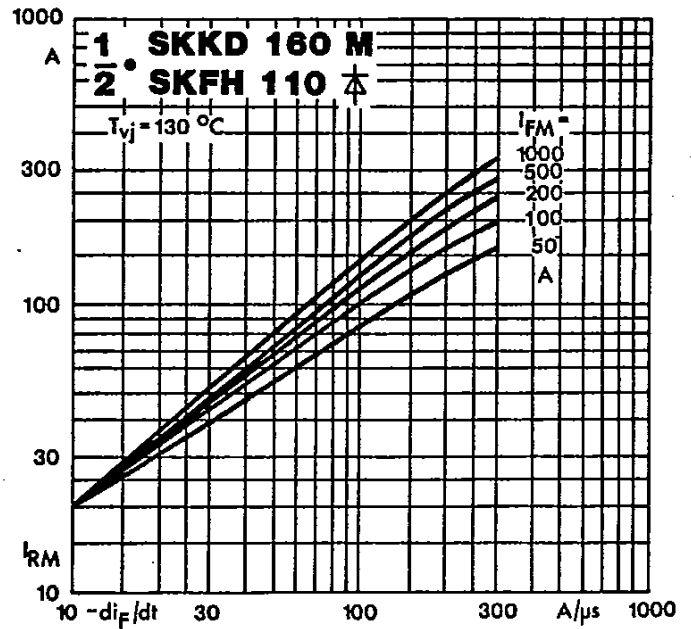


Fig. 17 b Peak recovery current vs. current decrease

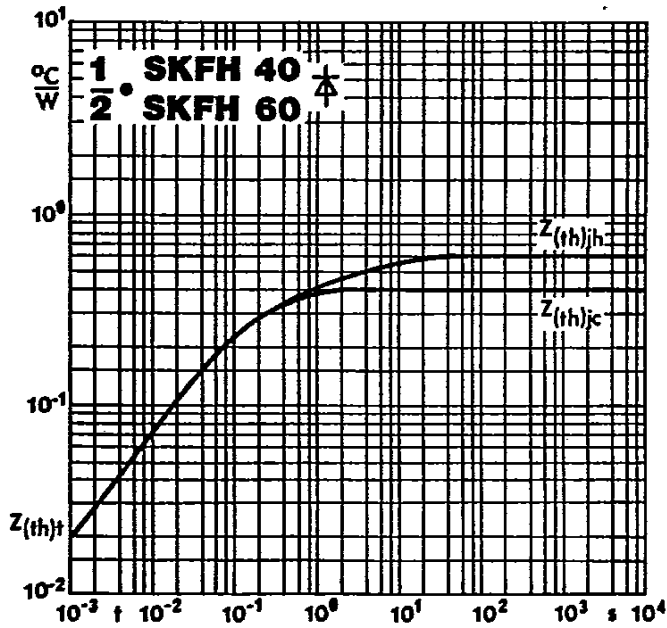


Fig. 18 a Transient thermal impedance vs. time

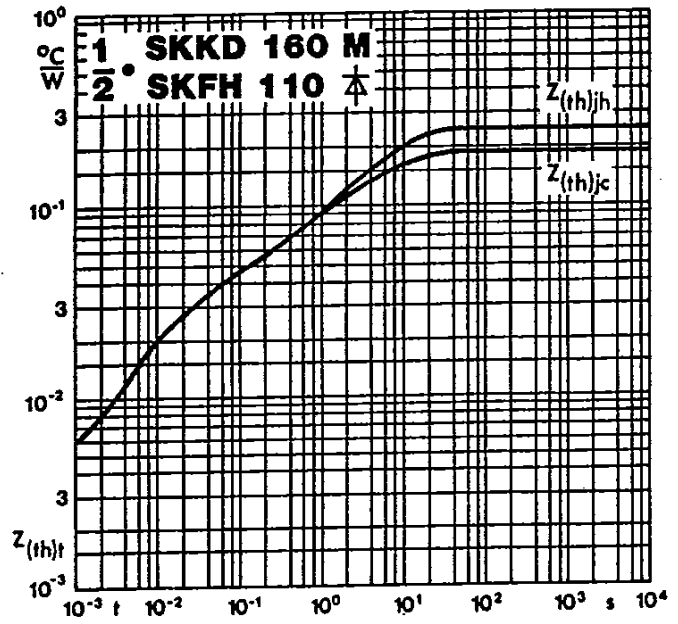


Fig. 18 b Transient thermal impedance vs. time

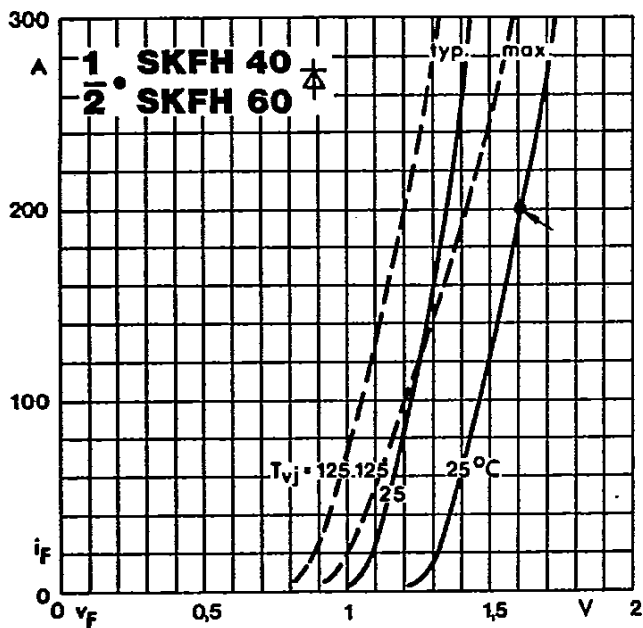


Fig. 19 a Forward characteristics

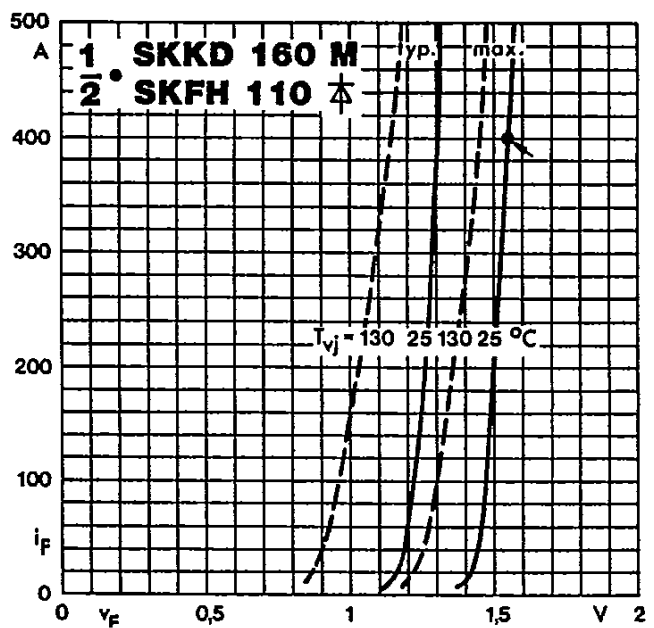


Fig. 19 b Forward characteristics

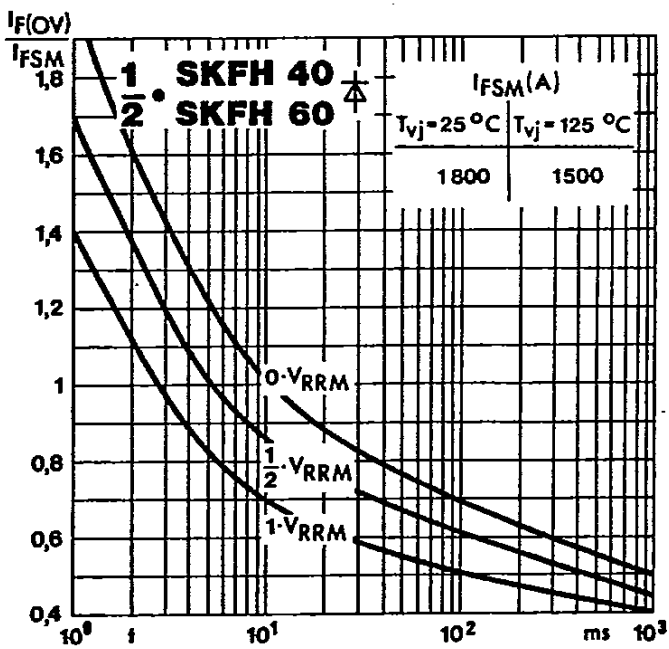


Fig. 20 a Surge overload current vs. time

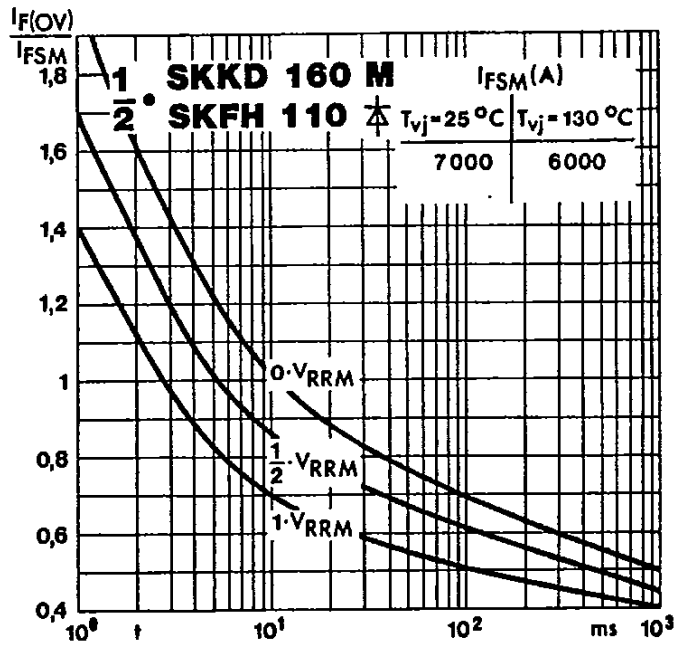


Fig. 20 b Surge overload current vs. time