



Topstek Current Transducer TA5A4V .. TA50A4V


TA 5A~50A

Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (9 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

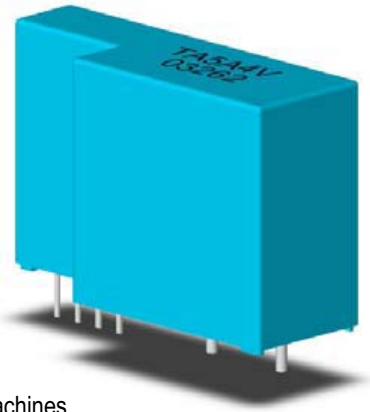

Specifications



| Parameter | Symbol | Unit | TA 5A 4V | TA 7.5A 4V | TA 10A 4V | TA 12.5A 4V | TA 15A 4V | TA 18.5A 4V | TA 20A 4V | TA 25A 4V | TA 37.5A 4V | TA 50A 4V |
|--------------------------------------|-----------------|-----------------|---|------------|-----------|-------------|-----------|-------------|-----------|-----------|-------------|-----------|
| Nominal Input Current | I_{fn} | A DC | 5 | 7.5 | 10 | 12.5 | 15 | 18.5 | 20 | 25 | 37.5 | 50 |
| Linear Range | I_{fs} | A DC | ±15 | ±23 | ±30 | ±38 | ±45 | ±56 | ±60 | ±75 | ±112 | ±150 |
| Diameter of Primary Coil | d | mm | 1 | 1 | 1.2 | 1.4 | 1.4 | 1.4 | 1.4 | 1.6 | 1.6x2.5 | 1.6x2.5 |
| Turns of Primary Coil | T | T | 5 | 3 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 |
| Ampere-Turn of Primary Coil | AT | AT | 25 | 22.5 | 20 | 25 | 15 | 18.5 | 20 | 25 | 37.5 | 50 |
| Nominal Output Voltage | V_{hn} | V | 4 V±1% at $I_f=I_{fn}$ ($R_L=10k\Omega$) | | | | | | | | | |
| Offset Voltage | V_{os} | mV | Within ±40 mV @ $I_f=0$, $T_a=25^\circ\text{C}$ | | | | | | | | | |
| Output Resistance | R_{OUT} | Ω | < 100 Ω (50 Ω nominal) | | | | | | | | | |
| Hysteresis Error | V_{oh} | mV | Within ±15 mV @ $I_f=I_{fn}\rightarrow 0$ | | | | | | | | | |
| Supply Voltage | V_{CC}/V_{EE} | V | ±15V ±5% | | | | | | | | | |
| Linearity (Within ± I_{fn}) | ρ | % | Within ±1% of I_{fn} | | | | | | | | | |
| Consumption Current | I_{CC} | mA | ±9 mA nominal | | | | | | | | | |
| Response Time (90% V_{hn}) | T_r | μsec | 13 μsec max. @ $d I_f / dt = I_{fn} / \mu\text{sec}$ | | | | | | | | | |
| Thermal Drift of Output | - | %/°C | Within ±0.1 %/°C @ I_{fn} | | | | | | | | | |
| Thermal Drift of Zero Current Offset | - | mV/°C | Within ±3 mV/°C @ I_{fn} | | | | | | | | | |
| Dielectric Strength | - | V | AC2.5KV X 60 sec | | | | | | | | | |
| Isolation Resistance @ 1000 VDC | R_{IS} | M Ω | >1000 M Ω | | | | | | | | | |
| Operating Temperature | T_a | °C | -15°C to 80°C | | | | | | | | | |
| Storage Temperature | T_s | °C | -20°C to 85°C | | | | | | | | | |
| Mass | W | g | 14 g | | | | | | | | | |




Topstek Current Transducer TA5A4V .. TA50A4V

Appearance, dimensions and pin identification for 5A to 25A models


All dimensions in mm ± 0.1 , holes $-0, +0.2$ except otherwise noted

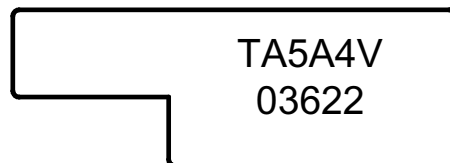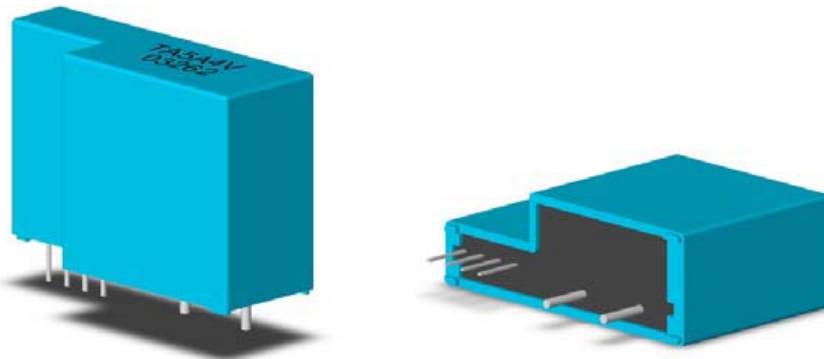

Model number and date code marking

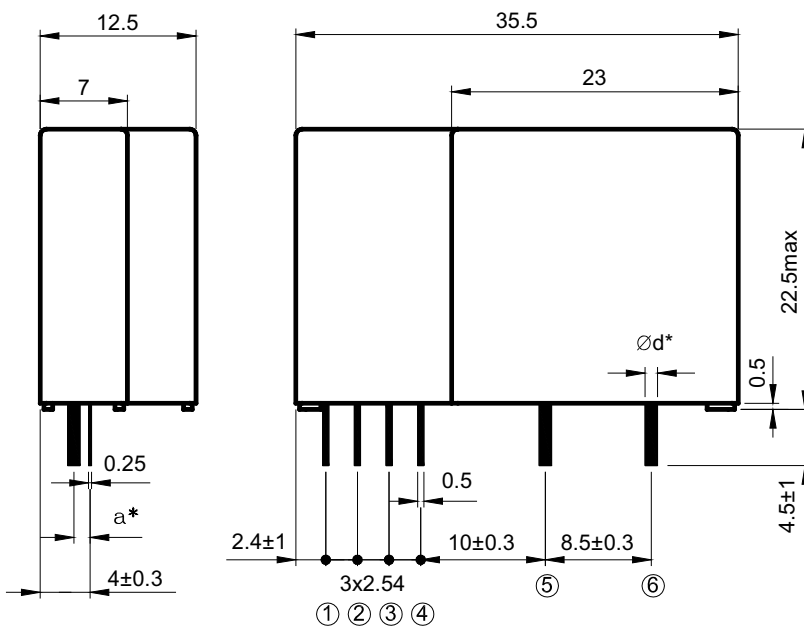

| Pin Assignment | |
|----------------|------------------|
| ① | +15V |
| ② | -15V |
| ③ | V _{out} |
| ④ | 0V |
| ⑤ | I ₊ |
| ⑥ | I ₋ |

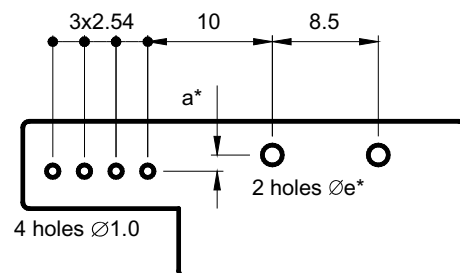

5A to 25A PCB mounting hole layout

| Part Number | a* (mm) | d* (mm) | e* (mm) |
|-------------|---------|---------|---------|
| TA5A4V | 1.3 | Ø1.0 | Ø1.6 |
| TA7.5A4V | 1.3 | Ø1.0 | Ø1.6 |
| TA10A4V | 1.4 | Ø1.2 | Ø1.8 |
| TA12.5A4V | 1.5 | Ø1.4 | Ø2.0 |
| TA15A4V | 1.5 | Ø1.4 | Ø2.0 |
| TA18.5A4V | 1.5 | Ø1.4 | Ø2.0 |
| TA20A4V | 1.5 | Ø1.4 | Ø2.0 |
| TA25A4V | 1.6 | Ø1.6 | Ø2.2 |








Topstek Current Transducer TA5A4V .. TA50A4V

Appearance, dimensions and pin identification for 37.5A to 50A models


All dimensions in mm ± 0.1 , holes $-0, +0.2$ except otherwise noted

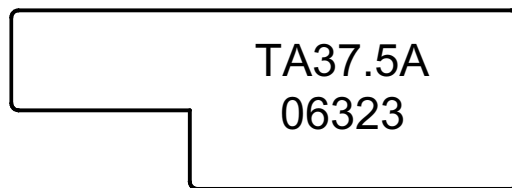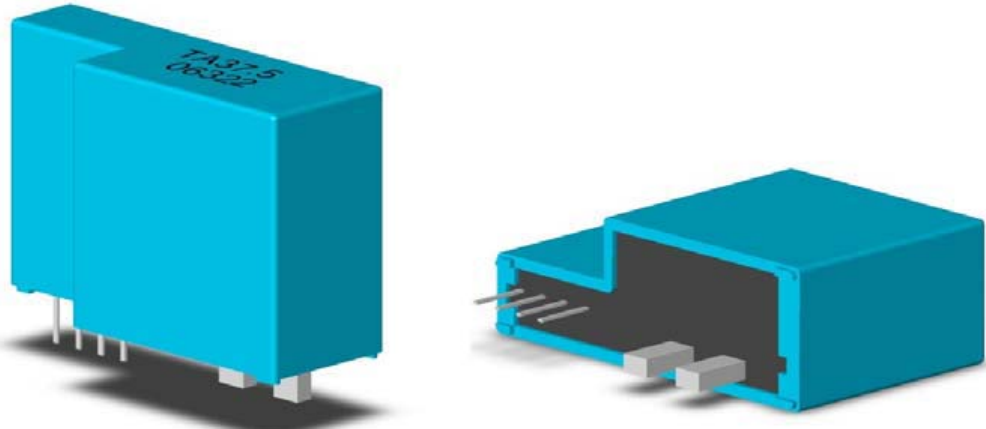

Model number and date code marking

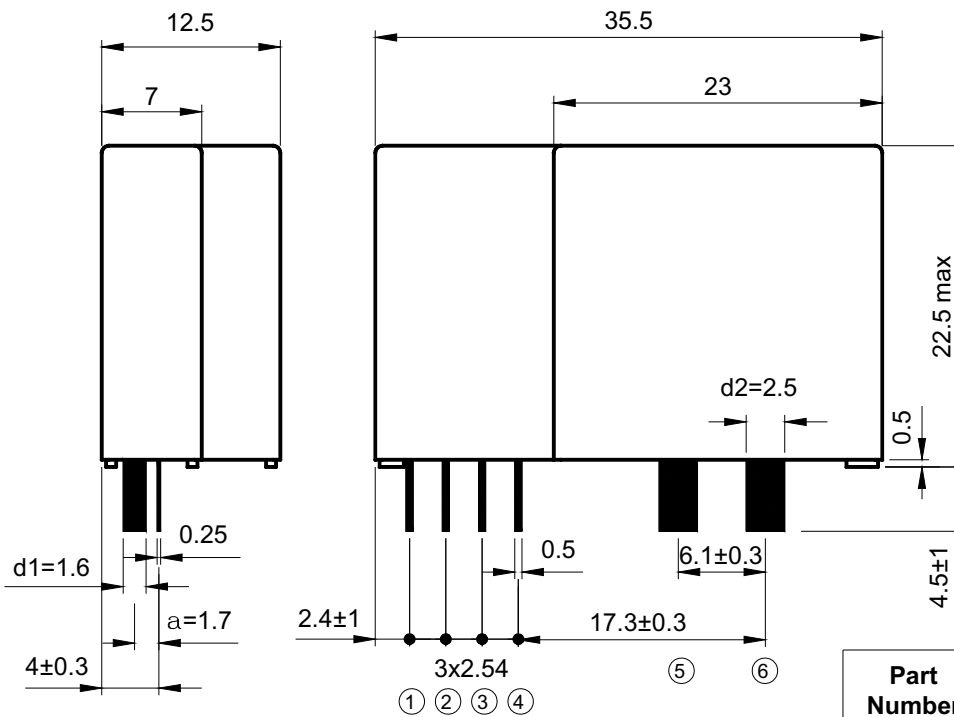

| Pin Assignment | |
|----------------|------------------|
| ① | +15V |
| ② | -15V |
| ③ | V _{OUT} |
| ④ | 0V |
| ⑤ | I+ |
| ⑥ | I- |

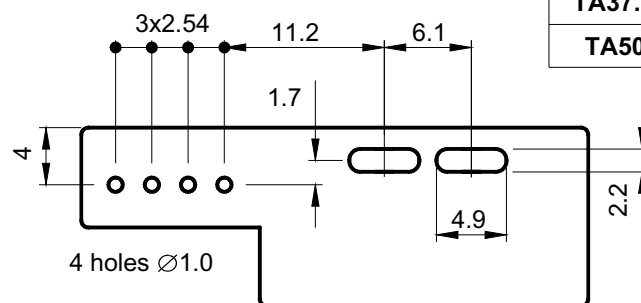

TA37.5A..TA50A PCB mounting hole layout

| Part Number | a* (mm) | d1xd2 (mm) | hole (mm) |
|-------------|---------|------------|-----------|
| TA37.5A | 1.7 | □1.6x2.5 | □2.2x4.9 |
| TA50A | 1.7 | □1.6x2.5 | □2.2x4.9 |








Topstek Current Transducer TA5A4V .. TA50A4V

Appearance, dimensions and pin identification for TA37.5A-P .. TA50A-P models


All dimensions in mm ± 0.1 , holes $-0, +0.2$ except otherwise noted

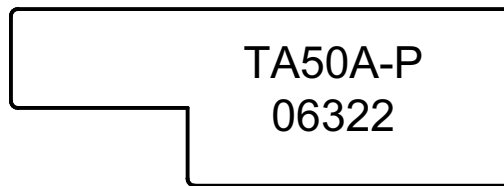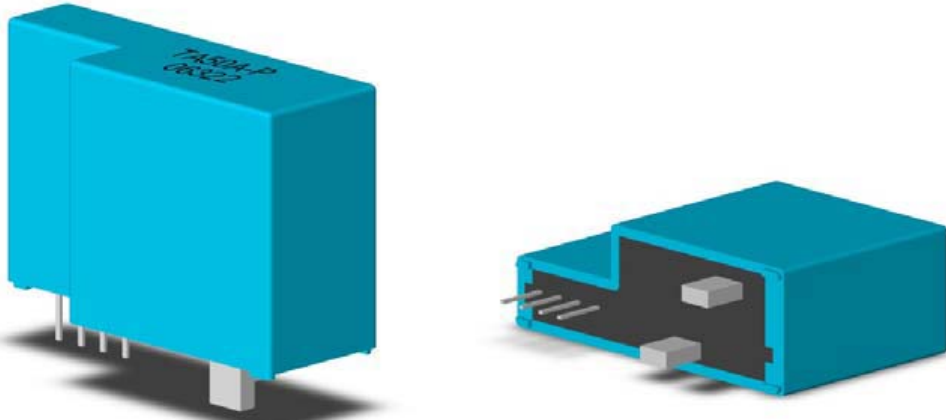

Model number and date code marking

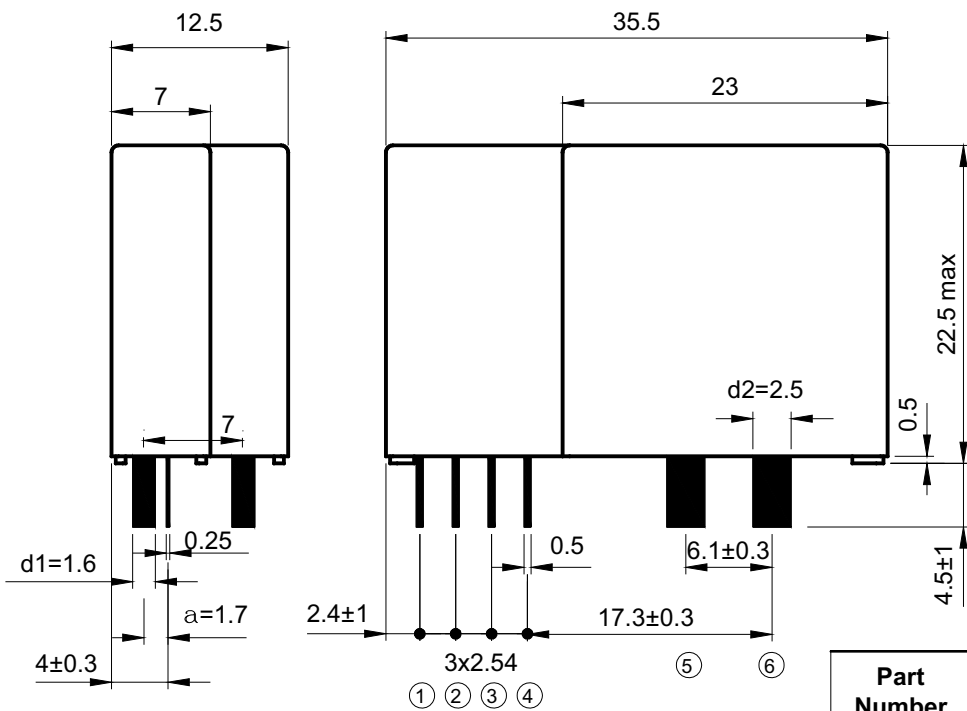

| Pin Assignment | |
|----------------|------------------|
| ① | +15V |
| ② | -15V |
| ③ | V _{OUT} |
| ④ | 0V |
| ⑤ | I+ |
| ⑥ | I- |

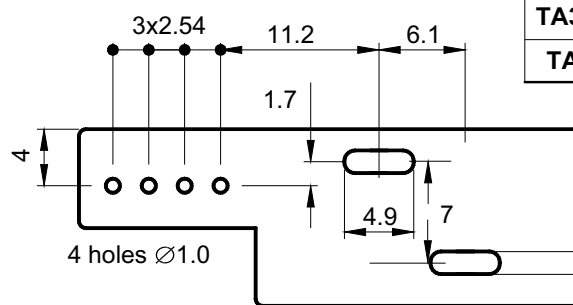

TA37.5A-P..TA50A-P PCB mounting hole layout

| Part Number | a* (mm) | d1xd2 (mm) | hole (mm) |
|-------------|---------|------------|-----------|
| TA37.5A-P | 1.7 | 1.6x2.5 | 2.2x4.9 |
| TA50A-P | 1.7 | 1.6x2.5 | 2.2x4.9 |

