



TDA7499

LINEAR INTEGRATED CIRCUIT


6 + 6W STEREO AMPLIFIER WITH MUTE AND STAND-BY

DESCRIPTION

The UTC **TDA7499** is class AB dual Audio Power Amplifier and designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

FEATURES

- * Wide supply voltage range up to $\pm 18V$
- * 6 + 6W @ THD =10%, $R_L = 8\Omega$, $V_S = +14V$
- * No POP at Turn-On/Off
- * MUTE (POP free)
- * STAND-BY feature (Low Iq)
- * Short circuit protection to GND
- * Thermal overload protection

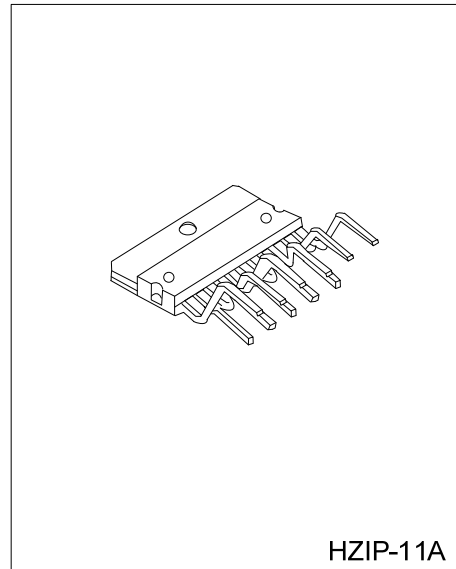


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
TDA7499L-J11-A-T	TDA7499G-J11-A-T	HZIP-11A	Tube

<p>TDA7499L-J11-A-T</p> <p>(1)Packing Type (2)Package Type (3)Lead Plating</p>	<p>(1) T: Tube (2) J11-A:HZIP-11A (3) H: Halogen Free, L: Lead Free</p>
--	---

■ PIN CONFIGURATION

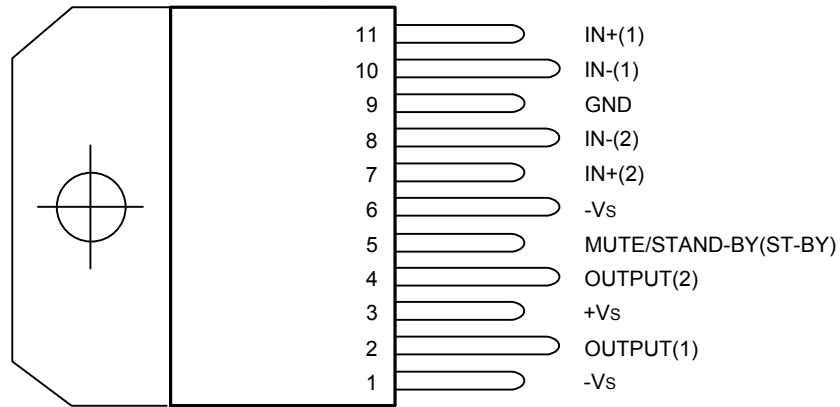

* TAB CONNECTED TO PIN 6

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
DC Supply Voltage	V_S	± 20	V
Output Peak current (internally limited)	$I_{O(PEAK)}$	2.5	A
Power Dissipation ($T_C=70^\circ\text{C}$)	P_D	23	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Operating Temperature	T_{OPR}	0 ~ +70	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +150	$^\circ\text{C}$

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	θ_{JC}	2.8	$^\circ\text{C/W}$
Junction to Ambient	θ_{JA}	35	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS

Refer to the test circuit, $V_S = \pm 14\text{V}$, $R_S = 50\Omega$, $G_V = 30\text{dB}$, $f = 1\text{KHz}$, $T_a = 25^\circ\text{C}$, unless otherwise specified.


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Supply Range	V_S	$R_L = 8\Omega$	± 5		± 18	V	
		$R_L = 4\Omega$	± 5		± 13.5	V	
Input Offset Voltage	V_{OS}		-25		+25	mV	
Total Input Noise	eN	A Curve		3		μV	
		$f = 20\text{Hz} \sim 22\text{KHz}$		4	8	μV	
Total Quiescent Current	I_Q			50	90	mA	
Output Bias Current	I_B			500		nA	
Input Resistance	R_I		15	20		K Ω	
Output Power	P_{OUT}	THD=10%	$R_L = 8\Omega$	8	10		W
			$R_L = 4\Omega, V_S \pm 11\text{V}$		7.5		W
		THD=1%	$R_L = 8\Omega$	6	7.5		W
			$R_L = 4\Omega, V_S \pm 11\text{V}$		6		W
Total Harmonic Distortion	THD	$R_L = 8\Omega, P_{OUT} = 1\text{W}, f = 1\text{KHz}$		0.03		%	
		$R_L = 8\Omega, P_{OUT} = 0.1 \sim 5\text{W}, V_S \pm 13\text{V}$ $f = 100\text{Hz} \sim 15\text{KHz}$		0.2	0.5	%	
		$R_L = 4\Omega, P_{OUT} = 1\text{W}, f = 1\text{KHz}$		0.02		%	
		$R_L = 4\Omega, P_{OUT} = 0.1 \sim 4\text{W}, V_S \pm 10\text{V}$ $f = 100\text{Hz} \sim 15\text{KHz}$		0.2	1	%	
Cross Talk	C_T	$f = 1\text{KHz}$		70		dB	
		$f = 10\text{KHz}$	50	60		dB	
Open Loop Voltage Gain	G_{OL}			80		dB	
Supply Voltage Rejection (each channel)	SVR	$f_r = 100\text{Hz}, V_r = 0.5\text{V}$		60		dB	
Slew Rate	SR		6.5	10		V/ μs	
Thermal Shut-down Junction Temperature	T_J			145		$^\circ\text{C}$	
MUTE FUNCTION (ref: +Vs)							
Mute/Play Threshold	V_{T_MUTE}		-7	-6	-5	V	
Mute Attenuation	A_M		60	70		dB	
STAND BY FUNCTION (ref: +Vs) (only For Split Supply)							
Stand-by/Mute Threshold	V_{T_ST-BY}		-3.5	-2.5	-0.5	V	
Quiescent Current @Stand-by	I_{Q_ST-BY}			3	6	mA	
Stand-by Attenuation	A_{ST-BY}			110		dB	

MUTE/STAND-BY FUNCTION


MUTE/STAND-BY function is assembled at pin 5 and to control the amplifier status by two different thresholds, referred to $+V_S$.

- When V_{pin5} higher than $+V_S - 2.5V$ the amplifier is in Stand-by mode and the final stage generators are off
- When V_{pin5} is between $+V_S - 2.5V$ and $+V_S - 6V$ the final stage current generators are switched on and the amplifier is in mute mode
- When V_{pin5} is lower than $+V_S - 6V$ the amplifier is play mode.


TYPICAL APPLICATION CIRCUIT

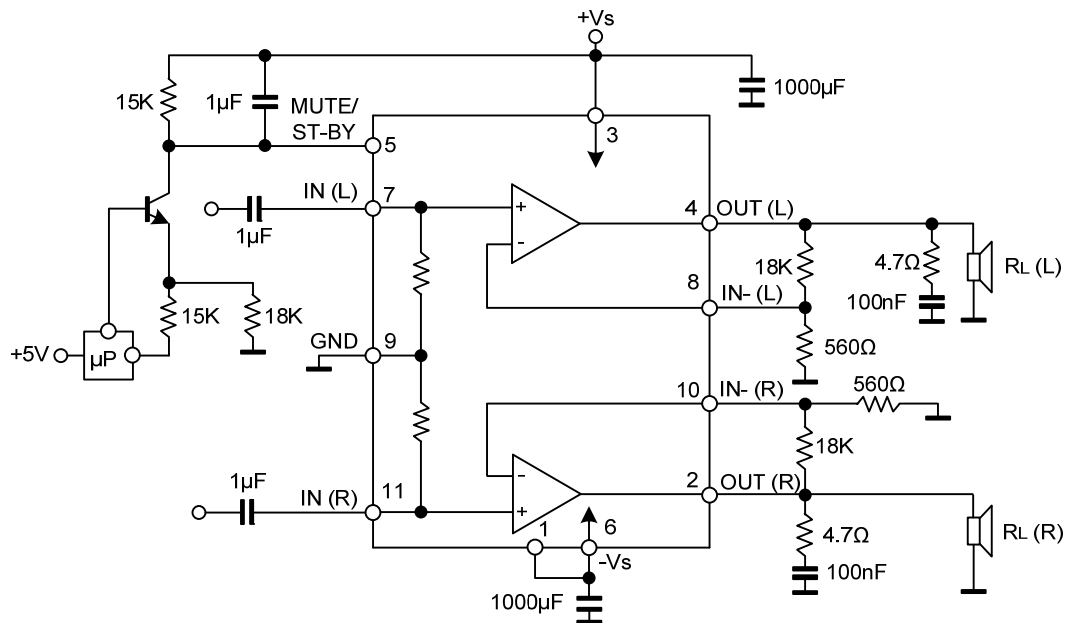

SINGLE SUPPLY APPLICATION

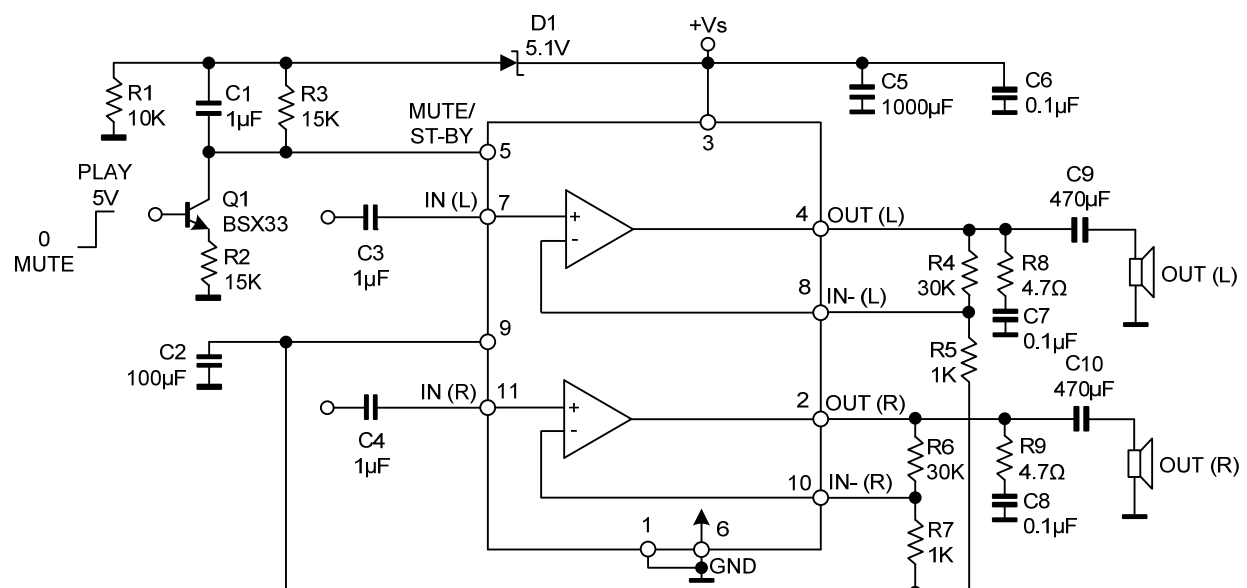

■ TEST AND APPLICATION CIRCUIT (STEREO CONFIGURATION)

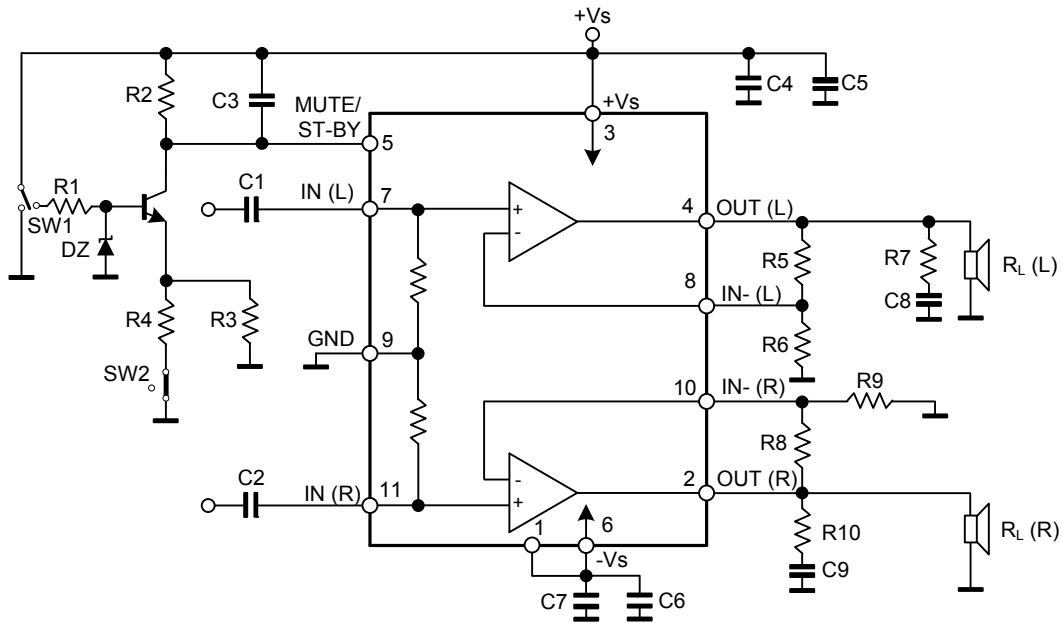

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.