

SOT323 PNP SILICON PLANAR SWITCHING TRANSISTOR

ZUMT2907A


ISSUE 1 – OCTOBER 1998 ☻

FEATURES

* Fast switching

PARTMARKING DETAIL – T15

COMPLIMENTARY TYPE – ZUMT2222A



ABSOLUTE MAXIMUM RATINGS.

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|----------------|-------------|-------------|
| Collector-Base Voltage | V_{CBO} | -60 | V |
| Collector-Emitter Voltage | V_{CEO} | -60 | V |
| Emitter-Base Voltage | V_{EBO} | -5 | V |
| Continuous Collector Current | I_C | -600 | mA |
| Power Dissipation at $T_{amb}=25^{\circ}C$ | P_{tot} | 330 | mW |
| Operating and Storage Temperature Range | $T_j; T_{stg}$ | -55 to +150 | $^{\circ}C$ |

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

| PARAMETER | SYMBOL | MIN. | MAX. | UNIT | CONDITIONS. |
|---------------------------------------|---------------|-------------------------------|--------------|---------------|--|
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | -60 | | V | $I_C=-10\mu A, I_E=0$ |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | -60 | | V | $I_C=-10mA, I_B=0^*$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | -5 | | V | $I_E=-10\mu A, I_C=0$ |
| Collector-Emitter Cut-Off Current | I_{CEX} | | -50 | nA | $V_{CE}=-30V, V_{BE}=-0.5V$ |
| Collector Cut-Off Current | I_{CBO} | | -10 -10 | nA μA | $V_{CB}=-50V, I_E=0$ $V_{CB}=-50V, I_E=0, T_{amb}=150^{\circ}C$ |
| Base Cut-Off Current | I_B | | -50 | nA | $V_{CE}=-30V, V_{BE}=-0.5V$ |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | | -0.4 -1.6 | V V | $I_C=-150mA, I_B=-15mA^*$ $I_C=-500mA, I_B=-50mA^*$ |
| Base-Emitter Saturation Voltage | $V_{BE(sat)}$ | | -1.3 -2.6 | V V | $I_C=-150mA, I_B=-15mA^*$ $I_C=-500mA, I_B=-50mA^*$ |
| Static Forward Current Transfer Ratio | h_{FE} | 75 100 100 100 50 | 300 | | $I_C=0.1mA, V_{CE}=-10V$ $I_C=1mA, V_{CE}=-10V$ $I_C=-10mA, V_{CE}=-10V$ $I_C=-150mA, V_{CE}=-10V^*$ $I_C=-500mA, V_{CE}=-10V^*$ |
| Transition Frequency | f_T | 200 | | MHz | $I_C=-50mA, V_{CE}=-20V$ $f=100MHz$ |


*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

ZUMT2907A

SWITCHING CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

| PARAMETER | SYMBOL | TYP. | MAX. | UNIT | CONDITIONS. |
|--------------------|-----------|------|------|------|---|
| Output Capacitance | C_{obo} | | 8 | pF | $V_{CB} = -10\text{V}$, $I_E = 0$, $f = 100\text{KHz}$ |
| Input Capacitance | C_{ibo} | | 30 | pF | $V_{BE} = -2\text{V}$, $I_C = 0$, $f = 100\text{KHz}$ |
| Turn On Time | t_{on} | 26 | 50 | ns | $V_{CE} = -30\text{V}$ $I_C = -150\text{mA}$, $I_{B1} = -15\text{mA}$ (See Turn On Circuit) |
| Turn Off Time | t_{off} | 70 | 110 | ns | $V_{CE} = -6\text{V}$, $I_C = -150\text{mA}$ $I_{B1} = I_{B2} = -15\text{mA}$ (See Turn Off Circuit) |

TURN ON TIME – TEST CIRCUIT

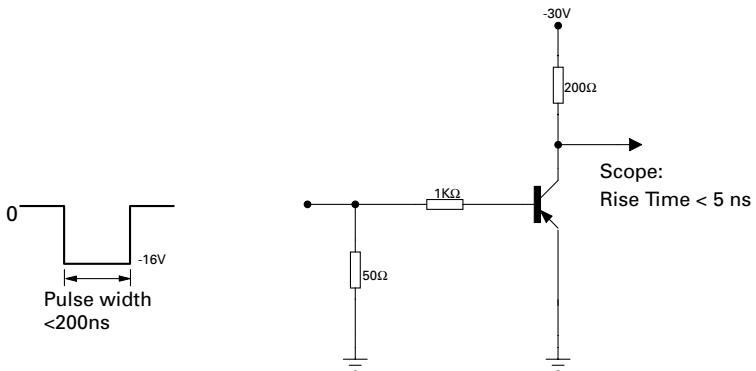

TURN OFF TIME – TEST CIRCUIT

