



GBL4A thru GBL4M

Glass Passivated Single-Phase Bridge Rectifier
Reverse Voltage 50~1000V Output Current 4.0A

Features



- Glass passivated Bridge Rectifiers
- Ideal for PCB
- High surge current capability
- Moisture sensitivity: level 1, per J-STD-020
- High temperature soldering guaranteed: 260°C/10 seconds
- Halogen-free according to IEC 61249-2-21 definition

Mechanical Data

- Case:GBL,Molding compound meets UL 94V-0 flammability rating
- Terminals:Matte tin plated leads,solderable per MII-STD-750 Method 2026,J-STD-002 and JESD22-B102, meets JESD 201 class 1A whisker test

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for TV,Monitor,SMPS,Adapter, Printer,Audio equipment,and Home Applications application

Maximum Ratings (TA = 25 °C unless otherwise noted)									
Parameter	Symbol	GBL4A	GBL4B	GBL4D	GBL4G	GBL4J	GBL4K	GBL4M	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	100	100	200	400	600	800	1000	V
Maximum average output rectified current $T_C=50^\circ C$	$I_{F(AV)}$	4.0 ⁽¹⁾							A
$T_C=40^\circ C$		3.0 ⁽²⁾							
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	150							A
Rating for fusing ($t \leq 8.3ms$)	I^2t	93							A ² s
Operating junction and storage temperature range	T_J, T_{STG}	-55 to 150							°C

Electrical Characteristics (TA = 25 °C unless otherwise noted)										
Parameter	Test Conditions	Symbol	GBL4A	GBL4B	GBL4D	GBL4G	GBL4J	GBL4K	GBL4M	Unit
Maximum instantaneous forward voltage	$I_F=2.0A$	V_F	1.0							Volts
Maximum DC reverse current at rated DC blocking voltage	$T_A=25^\circ C$	I_R	10.0							μA
	$T_A=150^\circ C$		500							
Typical junction capacitance	4.0 V, 1 MHz	C_J	95				40			pF
Typical thermal resistance ¹⁾	junction to ambient	$R_{\theta JA}$	22 ⁽²⁾							°C/W
	junction to case	$R_{\theta JL}$	3.5 ⁽¹⁾							

Note:1.Unit mounted on 3.0x3.0x0.11" thick (7.5x7.5x0.3 cm) Al.plate

2.Unit mounted on P.C.B. at 0.375" (9.5mm) lead length and 0.5x0.5" (13x13mm) copper pads

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

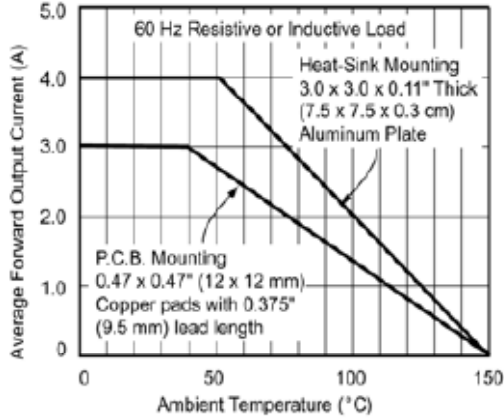


Figure 1. Derating Curves Output Rectified Current

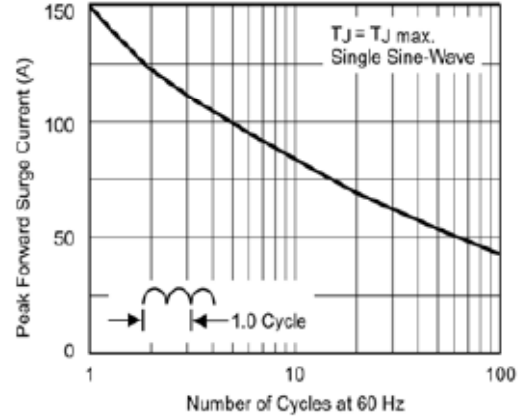


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

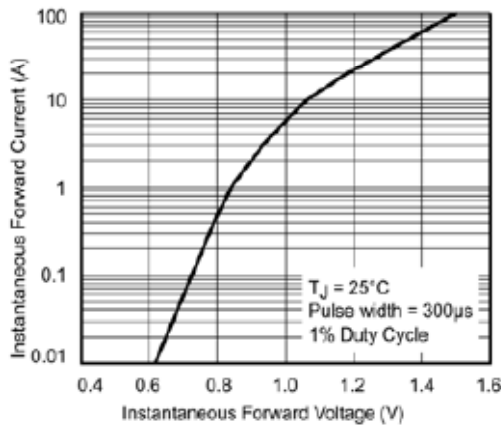


Figure 3. Typical Forward Voltage Characteristics Per Leg

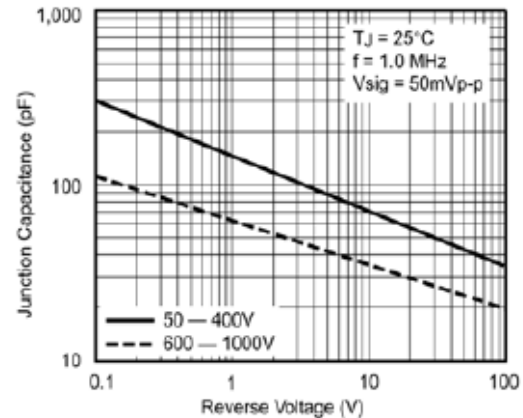


Figure 5. Typical Junction Capacitance Per Leg

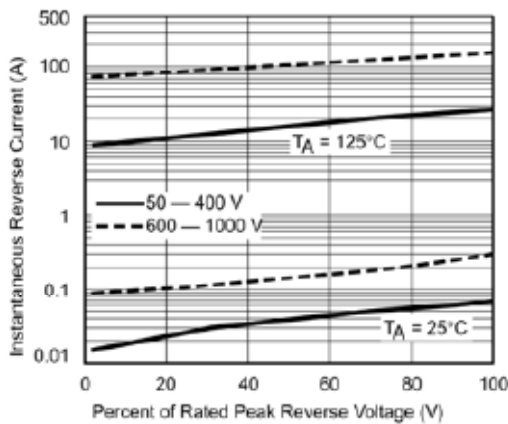


Figure 4. Typical Reverse Characteristics Per Leg


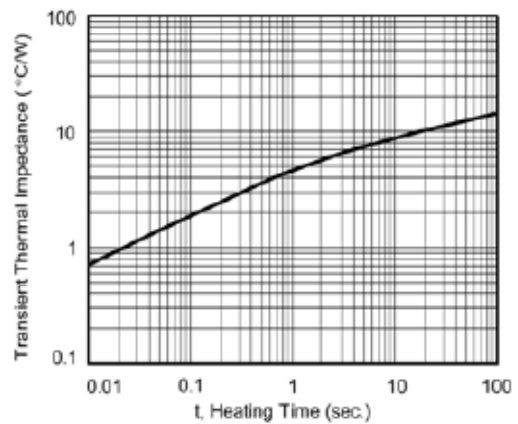


Figure 6. Typical Transient Thermal Impedance Per Leg

Package Outline Dimensions

Unit:inches(mm)

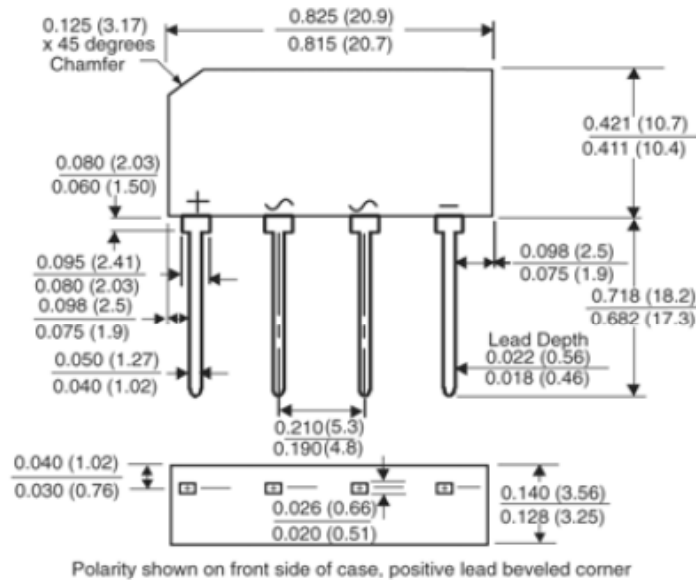

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page. (<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.