

# **HD74HC85**

# 4-bit Magnitude Comparator

REJ03D0555-0200 (Previous ADE-205-427) Rev.2.00 Oct 06, 2005

## **Description**

The HD74HC85 is designed for high speed comparison of two four bit words. This circuit has eight comparison input, 4 for each word; three cascade inputs (A < B, A > B, A = B); and three decision outputs (A < B, A > B, A = B). The result of a comparison is indicated by a high level on one of the decision outputs. Thus it may be determined whether one word is "greater than," "less than," or "equal to" the other word. By connecting the outputs of the least significant stage to the cascade inputs of the next stage, words of greater than four bits can be compared. In addition the least significant stage must have a high level applied to the A = B input, and a low level to the A < B, and A > B inputs.

### **Features**

• High Speed Operation:  $t_{pd}$  (Data Word Input to Output) = 20 ns typ ( $C_L = 50 \text{ pF}$ )

• High Output Current: Fanout of 10 LSTTL Loads

• Wide Operating Voltage:  $V_{CC} = 2 \text{ to } 6 \text{ V}$ 

• Low Input Current: 1 µA max

• Low Quiescent Supply Current:  $I_{CC}$  (static) = 4  $\mu$ A max (Ta = 25°C)

• Ordering Information

Part Name	Package Type	Package Code (Previous Code)	Package Abbreviation	Taping Abbreviation (Quantity)
HD74HC85P	DILP-16 pin	PRDP0016AE-B (DP-16FV)	Р	_
HD74HC85FPEL	SOP-16 pin (JEITA)	PRSP0016DH-B (FP-16DAV)	FP	EL (2,000 pcs/reel)
HD74HC85RPEL	SOP-16 pin (JEDEC)	PRSP0016DG-A (FP-16DNV)	RP	EL (2,500 pcs/reel)


Note: Please consult the sales office for the above package availability.

# **Function Table**


	Data Wo	rd Inputs		Ca	scading Inp	uts	Outputs		
A <sub>3</sub> , B <sub>3</sub>	A <sub>2</sub> , B <sub>2</sub>	A <sub>1</sub> , B <sub>1</sub>	A <sub>0</sub> , B <sub>0</sub>	A > Bin	A = Bin	A < Bin	A > Bout	A = Bout	A < Bout
$A_3 > B_3$	Х	Х	Х	Х	Х	Х	Н	L	L
A <sub>3</sub> < B <sub>3</sub>	Х	Х	Х	Х	Х	Х	L	L	Н
$A_3 = B_3$	$A_2 > B_2$	Х	Х	Х	Х	Х	Н	L	L
$A_3 = B_3$	A <sub>2</sub> < B <sub>2</sub>	Х	Х	Х	Х	Х	L	L	Н
$A_3 = B_3$	$A_2 = B_2$	A <sub>1</sub> > B <sub>1</sub>	Х	Х	Х	Х	Н	L	L
$A_3 = B_3$	$A_2 = B_2$	A <sub>1</sub> < B <sub>1</sub>	Х	Х	Х	Х	L	L	Н
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 > B_0$	Х	Х	Х	Н	L	L
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 < B_0$	Х	Х	Х	L	L	Н
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 = B_0$	L	L	L	Н	L	Н
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 = B_0$	L	L	Н	L	L	Н
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 = B_0$	Н	L	L	Н	L	L
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 = B_0$	Н	L	Н	L	L	L
$A_3 = B_3$	$A_2 = B_2$	$A_1 = B_1$	$A_0 = B_0$	Х	Н	Х	L	Н	L

H: High level
L: Low level
X: Irrelevant

# **Pin Arrangement**

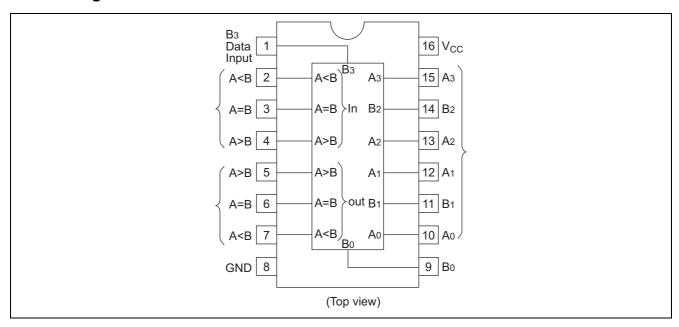

# **Logic Diagram**

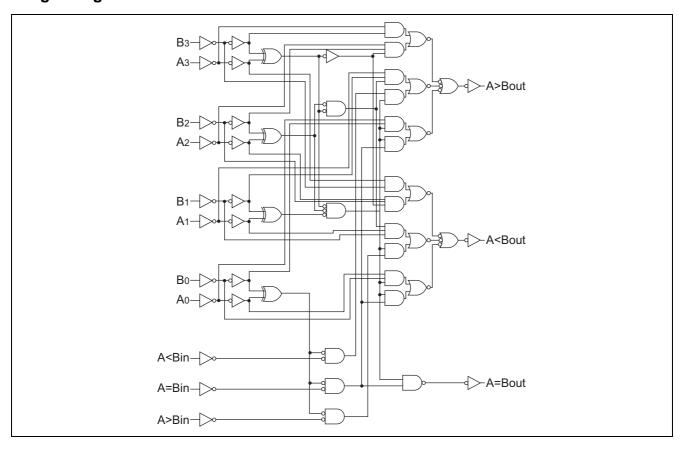

# **Absolute Maximum Ratings**

Item	Symbol	Ratings	Unit
Supply voltage range	V <sub>CC</sub>	-0.5 to 7.0	V
Input / Output voltage	Vin, Vout	-0.5 to V <sub>CC</sub> +0.5	V
Input / Output diode current	I <sub>IK</sub> , I <sub>OK</sub>	±20	mA
Output current	I <sub>0</sub>	±25	mA
V <sub>CC</sub> , GND current	I <sub>CC</sub> or I <sub>GND</sub>	±50	mA
Power dissipation	P <sub>T</sub>	500	mW
Storage temperature	Tstg	-65 to +150	°C

Note: The absolute maximum ratings are values, which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

# **Recommended Operating Conditions**

Item	Symbol	Ratings	Unit	Conditions	
Supply voltage	Vcc	2 to 6	V		
Input / Output voltage	V <sub>IN</sub> , V <sub>OUT</sub>	0 to V <sub>CC</sub>	V		
Operating temperature	Та	-40 to 85	°C		
		0 to 1000		V <sub>CC</sub> = 2.0 V	
Input rise / fall time <sup>*1</sup>	t <sub>r</sub> , t <sub>f</sub>	0 to 500	ns	V <sub>CC</sub> = 4.5 V	
		0 to 400		$V_{CC} = 6.0 \text{ V}$	

Note: 1. This item guarantees maximum limit when one input switches.

Waveform: Refer to test circuit of switching characteristics.


# **Electrical Characteristics**

			Т	a = 25°	С	Ta = -40 to+85°C				
Item	Symbol	V <sub>cc</sub> (V)	Min	Тур	Max	Min	Max	Unit	Test Cor	nditions
Input voltage	V <sub>IH</sub>	2.0	1.5	_	_	1.5	_	V		
		4.5	3.15	_	_	3.15	_			
		6.0	4.2	_	_	4.2	_			
	V <sub>IL</sub>	2.0	_	_	0.5	_	0.5	V		
		4.5	_	_	1.35	_	1.35			
		6.0	_	_	1.8	_	1.8			
Output voltage	V <sub>OH</sub>	2.0	1.9	2.0	_	1.9	_	V	$Vin = V_{IH} or V_{IL}$	$I_{OH} = -20 \mu A$
		4.5	4.4	4.5	_	4.4	_			
		6.0	5.9	6.0	_	5.9	_			
		4.5	4.18	_	_	4.13	_			$I_{OH} = -4 \text{ mA}$
		6.0	5.68	_	_	5.63	_			$I_{OH} = -5.2 \text{ mA}$
	V <sub>OL</sub>	2.0	_	0.0	0.1	_	0.1	V	$Vin = V_{IH} or V_{IL}$	$I_{OL} = 20 \mu A$
		4.5	_	0.0	0.1	_	0.1			
		6.0	_	0.0	0.1	_	0.1			
		4.5	_	_	0.26	_	0.33			$I_{OL} = 4 \text{ mA}$
		6.0	_	_	0.26	_	0.33			I <sub>OL</sub> = 5.2 mA
Input current	lin	6.0	_	_	±0.1	_	±1.0	μΑ	Vin = V <sub>CC</sub> or GND	
Quiescent supply current	Icc	6.0	_	_	4.0	_	40	μΑ	Vin = V <sub>CC</sub> or GN	ID, lout = $0 \mu A$


# Switching Characteristics ( $C_L = 50 \text{ pF}$ , Input $t_r = t_f = 6 \text{ ns}$ )

			Т	a = 25°	С	Ta = -40	to +85°C		
Item	Symbol	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit	Test Conditions
Propagation delay	t <sub>PLH</sub> , t <sub>PHL</sub>	2.0	_	_	210	_	265	ns	$C_0$ to $\Sigma_1$
time		4.5	_	20	42	_	53		
		6.0	_	_	36	_	45		
	t <sub>PLH</sub> , t <sub>PHL</sub>	2.0	_	_	175	_	220	ns	$A_1$ or $B_1$ to $\Sigma_1$
		4.5	_	20	35	_	44		
		6.0	_	_	30	_	37		
	t <sub>PLH</sub> , t <sub>PHL</sub>	2.0	_	_	125	_	155	ns	C <sub>0</sub> to C <sub>4</sub>
		4.5	_	12	25	_	31		
		6.0	_	_	21	_	26		
	t <sub>PLH</sub> , t <sub>PHL</sub>	2.0	_	_	155	_	195	ns	A <sub>1</sub> or B <sub>1</sub> to C <sub>4</sub>
		4.5	_	14	31	_	39		
		6.0	_	_	26	_	33		
Output fall time	t <sub>THL</sub>	2.0	_	_	75	_	95	ns	
		4.5	_	5	15	_	19		
		6.0	_		13		16		
Input capacitance	Cin	_	_	5	10	_	10	pF	


## **Test Circuit**

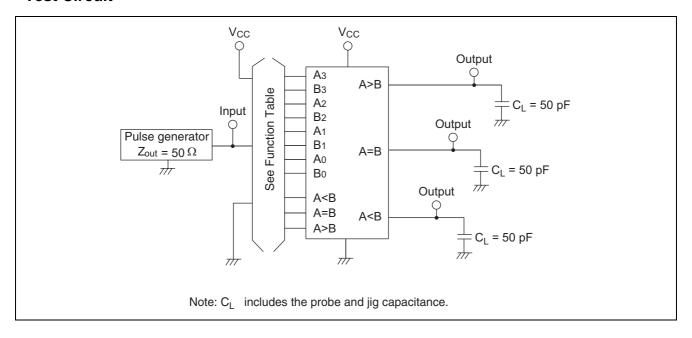



### **Waveforms**

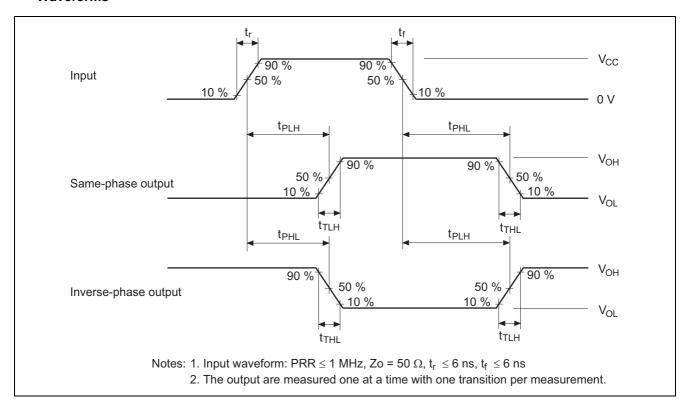

## **Package Dimensions**

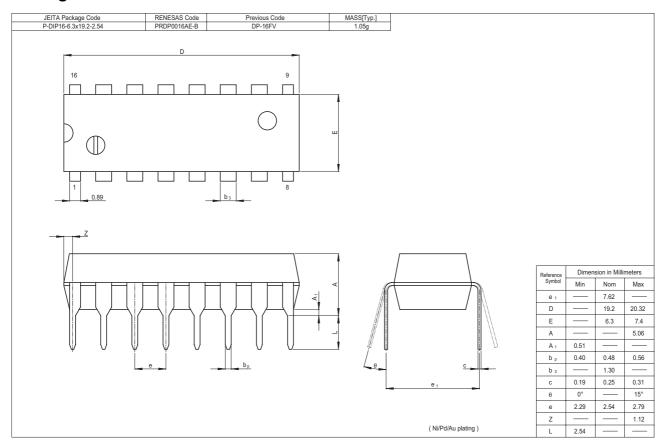

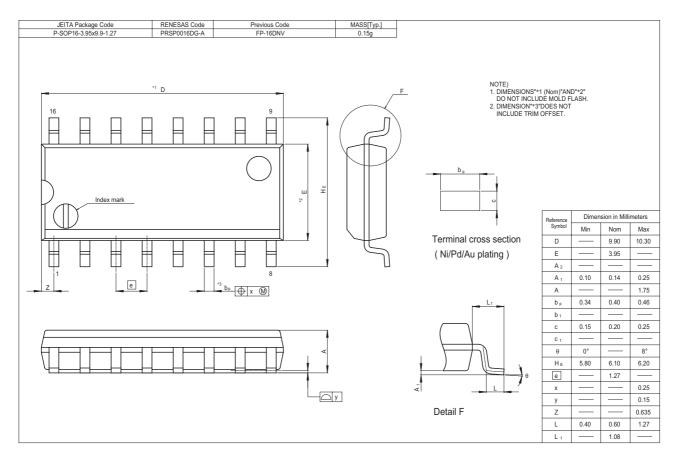

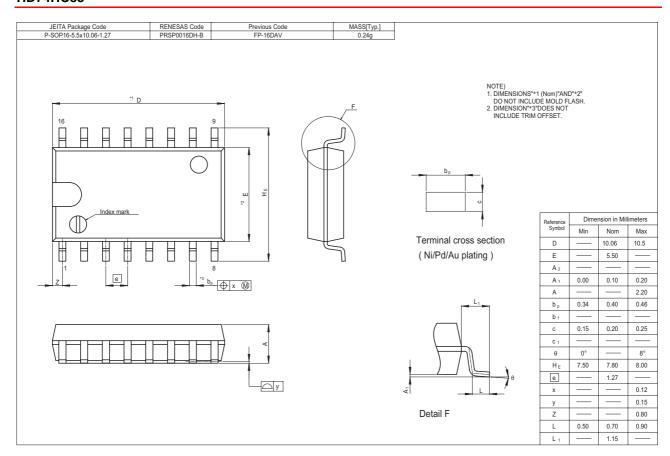

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

### Notes regarding these materials

- Notes regarding these materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.

  2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

  3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.

  The information described here may contain technical inaccuracies or typographical errors.

  Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

  Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).
- home page (http://www.renesas.com).

  4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

  5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.

  6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.

  7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

  Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

  8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



### **RENESAS SALES OFFICES**

http://www.renesas.com

Refer to "http://www.renesas.com/en/network" for the latest and detailed information

**Renesas Technology America, Inc.** 450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology Hong Kong Ltd.

7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2730-6071

**Renesas Technology Taiwan Co., Ltd.** 10th Floor, No.99, Fushing North Road, Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd. Unit2607 Ruijing Building, No.205 Maoming Road (S), Shanghai 200020, China Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632 Tel: <65> 6213-0200, Fax: <65> 6278-8001

**Renesas Technology Korea Co., Ltd.**Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea Tel: <82> 2-796-3115, Fax: <82> 2-796-2145

Renesas Technology Malaysia Sdn. Bhd.

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia Tel: <603> 7955-9390, Fax: <603> 7955-9510

0	2005	Panasas Tachnology Corn	All rights reserved	Printed in Ianan